

Electrical Characteristics


Nominal Impedance: 75 ohms
Frequency Range: DC to 2 GHz
Operating Voltage (rms): 250 V maximum at sea level

Mechanical Characteristics

Mating Cycles: 200 cycles minimum

Environmental Characteristics

Temperature Range: -55 °C to +85 °C

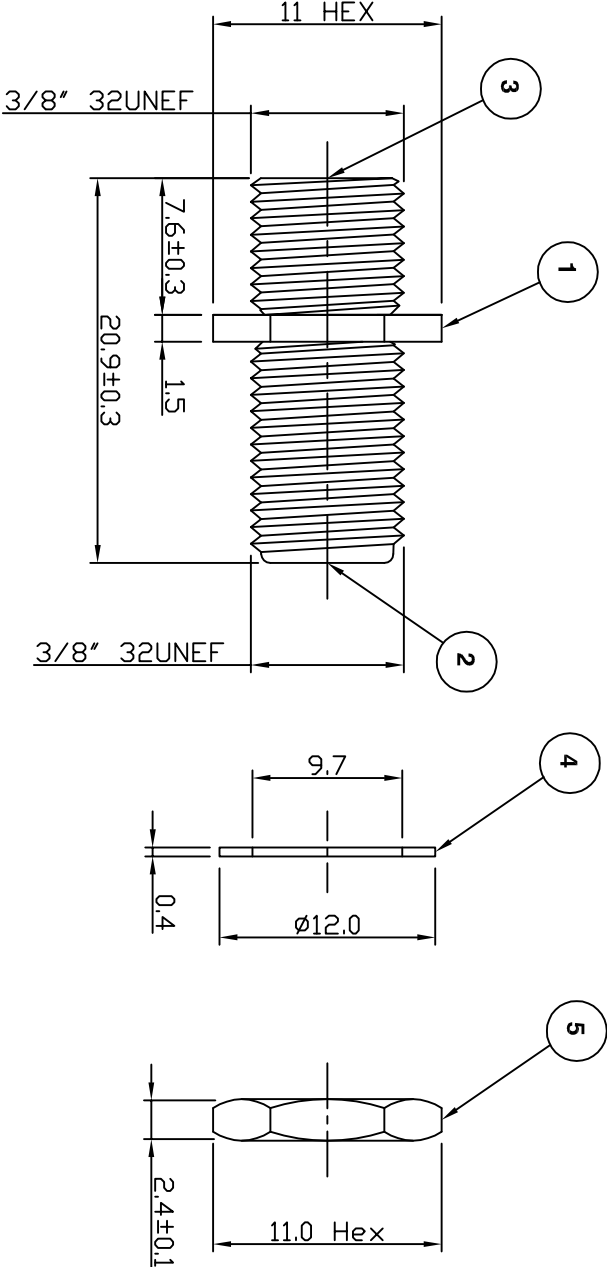

PART	DESCRIPTION
1	Body
2	Dielectric
3	Contact
4	Washer
5	Nut

Dimension & material update	KA	3	24 Sept 08
CAD Issue	SN	2	12 Dec 02
First Issue	CBB	1	05 Nov 99
DESCRIPTION OF REVISION	APPVD	ISS	DATE



EMERSON
Network Power

Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale
DIMENSIONS: mm
TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY: S Nash
CHECKED BY: P Couzens
APPROVED BY: P Couzens
DATE: 12 Dec 02

TITLE:
**F Bulkhead Jack to Jack
Adaptor**

PART NUMBER:
VFA340

PAGE: 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[VFA340](#)