


**SERIES:** VFK400W-DIN | **DESCRIPTION:** DC-DC CONVERTER
**FEATURES**

- up to 400 W isolated output
- rugged metal enclosure with integrated heat sink
- 4:1 input range (10~36 Vdc, 18~75 Vdc)
- single output from 12~48 Vdc
- 1,500 Vdc isolation
- over current, over temperature, over voltage, and short circuit protection
- remote on/off
- efficiency up to 87%
- comes with DIN-rail mount

**MODEL**

| <b>MODEL</b>                     | <b>input voltage range (Vdc)</b> | <b>output voltage (Vdc)</b> | <b>output current max (A)</b> | <b>output power max (W)</b> | <b>ripple and noise<sup>1</sup> max (mVp-p)</b> | <b>efficiency max (%)</b> |
|----------------------------------|----------------------------------|-----------------------------|-------------------------------|-----------------------------|-------------------------------------------------|---------------------------|
| VFK400W-Q24-S12-DIN              | 10~36                            | 12                          | 33.3                          | 400                         | 200                                             | 87                        |
| VFK400W-Q24-S24-DIN              | 10~36                            | 24                          | 16.7                          | 400                         | 240                                             | 86                        |
| VFK400W-Q24-S48-DIN              | 10~36                            | 48                          | 8.3                           | 398                         | 480                                             | 86                        |
| VFK400W-Q48-S12-DIN <sup>2</sup> | 20~75                            | 12                          | 33.3                          | 400                         | 200                                             | 87                        |
| VFK400W-Q48-S24-DIN              | 18~75                            | 24                          | 16.7                          | 400                         | 240                                             | 86                        |
| VFK400W-Q48-S48-DIN              | 18~75                            | 48                          | 8.3                           | 398                         | 480                                             | 86.5                      |

Note: 1. Ripple and noise are measured at full load, 20 MHz BW with 10 $\mu$ F tantalum capacitor and 1 $\mu$ F ceramic capacitor across the output. The 48 Vdc output models require a 22 $\mu$ F aluminum capacitor and a 1 $\mu$ F ceramic capacitor across the output.  
 2. An external input capacitor of 470 $\mu$ F is recommended to reduce input ripple voltage.

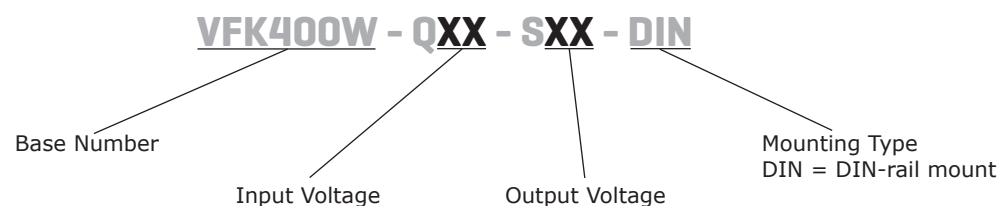**PART NUMBER KEY**

## INPUT

| parameter               | conditions/description                                         | min                                  | typ          | max      | units      |
|-------------------------|----------------------------------------------------------------|--------------------------------------|--------------|----------|------------|
| operating input voltage | 24 Vdc input                                                   | 10                                   | 24           | 36       | Vdc        |
|                         | 48 Vdc input<br>12 Vdc output model<br>24/48 Vdc output models | 20<br>18                             | 48<br>48     | 75<br>75 | Vdc<br>Vdc |
| under voltage shutdown  | 24 Vdc input<br>power up<br>power down                         |                                      | 9.5<br>8.5   |          | Vdc<br>Vdc |
|                         | 48 Vdc input<br>power up<br>power down                         |                                      | 17.8<br>15.5 |          | Vdc<br>Vdc |
| CTRL <sup>1</sup>       | positive logic                                                 | models ON (>3.5 Vdc or open circuit) |              |          |            |
|                         |                                                                | models OFF (0~1.2 Vdc)               |              |          |            |
| filter                  | pi filter                                                      |                                      |              |          |            |

Note: 1. Open collector refer to -Vin

## OUTPUT

| parameter                  | conditions/description               | min | typ   | max   | units |
|----------------------------|--------------------------------------|-----|-------|-------|-------|
| maximum output capacitance | for all models                       |     |       | 2,200 | μF    |
| line regulation            | measured from high line to low line  |     |       | ±1    | %     |
| load regulation            | measured from full load to zero load |     |       | ±1    | %     |
| voltage accuracy           |                                      |     |       | ±1.5  | %     |
| adjustability              |                                      | 90  |       | 105   | %     |
| switching frequency        |                                      |     | 250   |       | kHz   |
| transient response         | 25% step load change                 |     |       | 500   | μs    |
| temperature coefficient    |                                      |     | ±0.03 |       | %/°C  |

## PROTECTIONS

| parameter                   | conditions/description   | min | typ | max | units |
|-----------------------------|--------------------------|-----|-----|-----|-------|
| short circuit protection    | continuous               |     |     |     |       |
| over current protection     | % nominal output current | 110 |     | 150 | %     |
| over voltage protection     |                          | 115 |     | 140 | %     |
| over temperature protection | shutdown                 |     | 110 |     | °C    |

## SAFETY AND COMPLIANCE

| parameter            | conditions/description                                          | min   | typ | max | units |
|----------------------|-----------------------------------------------------------------|-------|-----|-----|-------|
| isolation voltage    | for 1 minute: input to output; input to case;<br>output to case | 1,500 |     |     | Vdc   |
| isolation resistance |                                                                 | 10    |     |     | MΩ    |
| RoHS                 | 2011/65/EU (CE)                                                 |       |     |     |       |

## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curves    | -40 |     | 85  | °C    |
| storage temperature   |                        | -55 |     | 105 | °C    |

## MECHANICAL

| parameter     | conditions/description                       | min | typ  | max | units |
|---------------|----------------------------------------------|-----|------|-----|-------|
| dimensions    | 7.83 x 5.00 x 2.11 (199.0 x 127.0 x 53.6 mm) |     |      |     | inch  |
| case material | steel and aluminum extrusion                 |     |      |     |       |
| weight        |                                              |     | 1.53 |     | kg    |

## MECHANICAL DRAWING

units: inch[mm]


tolerance: X.XX =  $\pm 0.02$ [ $\pm 0.5$ ]X.XXX =  $\pm 0.010$ [ $\pm 0.25$ ]

wire range: 22~12 AWG


screw size: #6-32

mounts to TS35 rails


| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1, 2            | +Vin     |
| 3, 4            | -Vin     |
| 5               | REM      |
| 6               | CASE     |
| 7, 8            | +Vout    |
| 9               | +S       |
| 10              | TRIM     |
| 11              | -S       |
| 12, 13          | -Vout    |

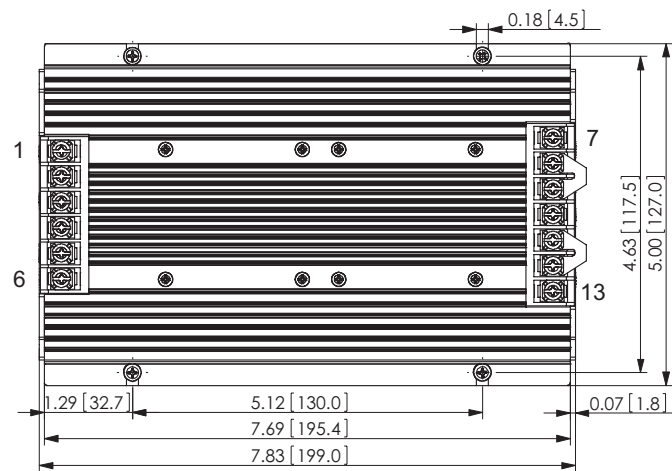


Top View

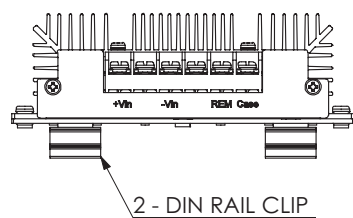


Front View

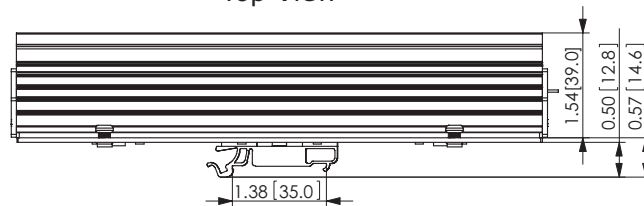

Side View

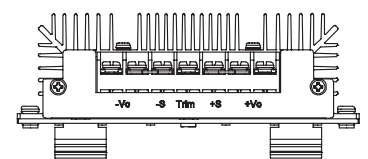


Back View

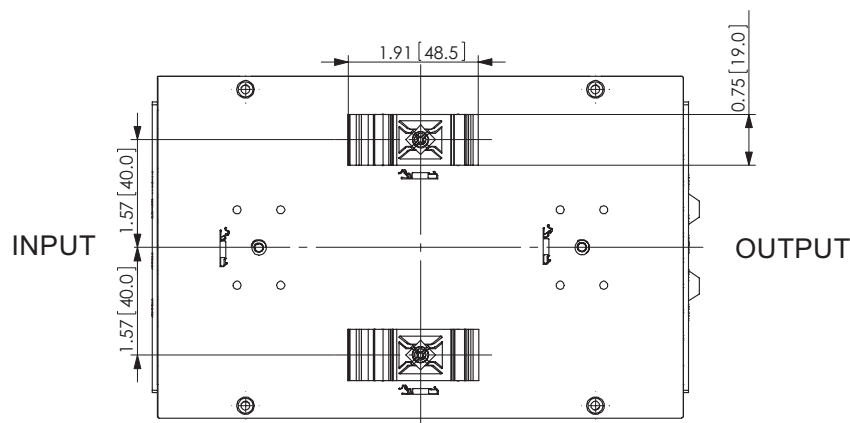


Bottom View

## DERATING CURVES

VFK400W-DIN Power Derating Curves At Nominal Input  
(Includes VFK400W-Q24-S12-DIN and all 48 Vdc input models)

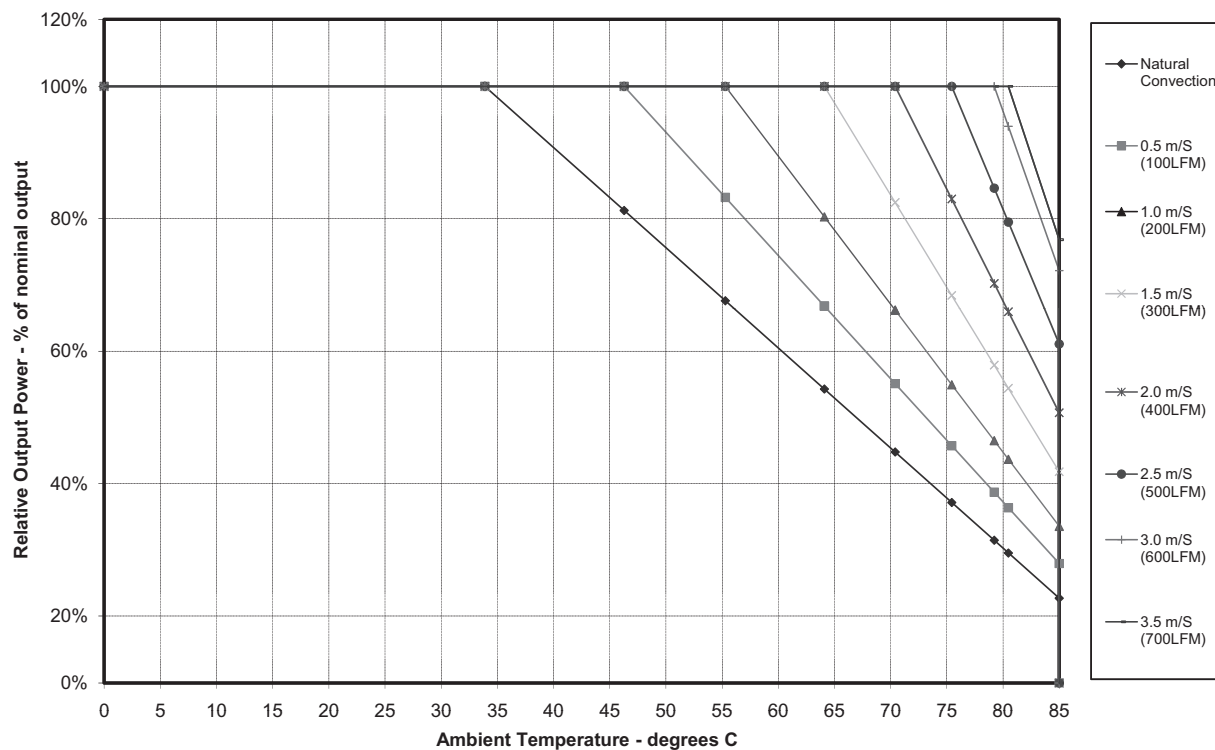

VFK400W-DIN Power Derating Curves At Nominal Input  
(Includes VFK400W-Q24-S24-DIN and VFK400W-Q24-S48-DIN)

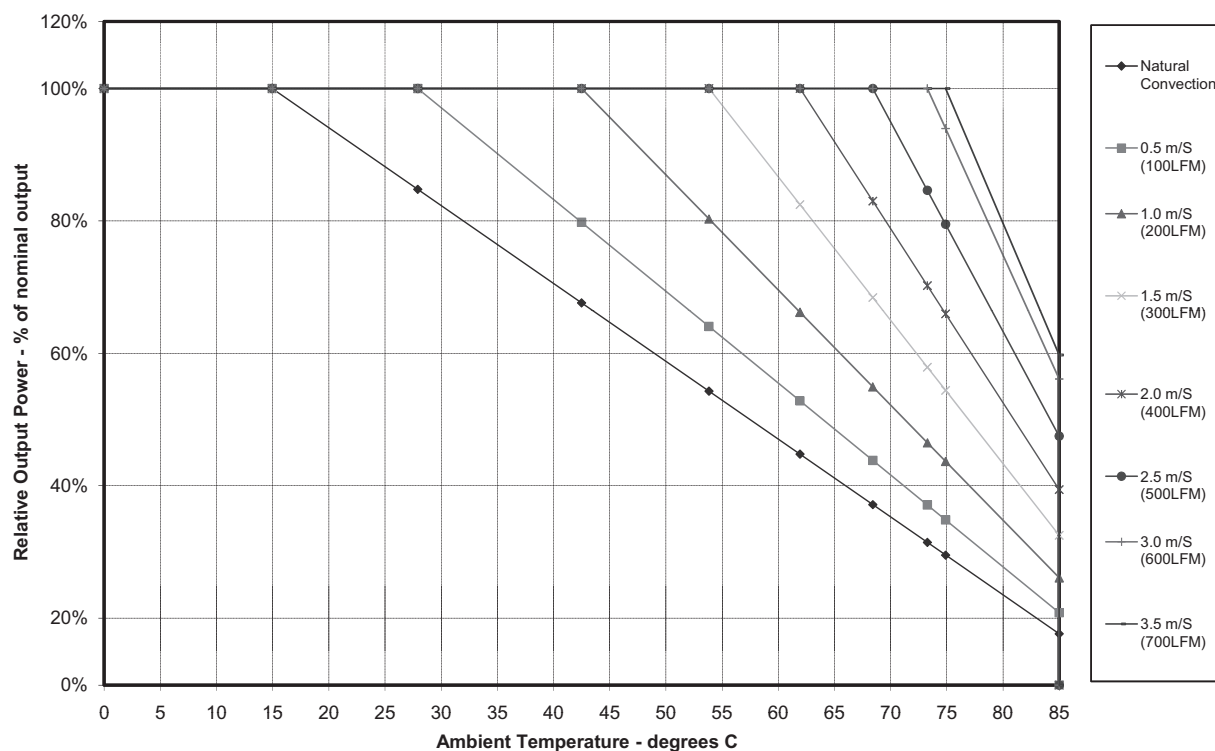

APPLICATION NOTES

1. Output Voltage Trimming

Leave open if not used.

Figure 1

Application Circuit for Trim pin

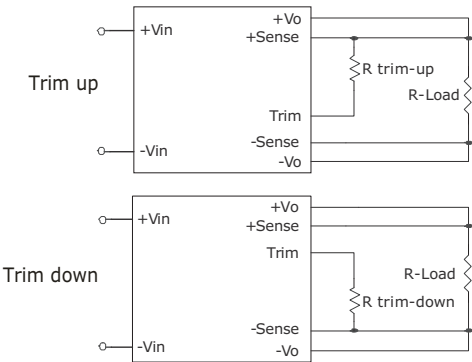


Table 1

Trim Up Resistor Values (MΩ)<sup>1</sup>

| Desired Vout<br>(%Vout)<br>Nom. Vout<br>(Vdc) | 101% | 102% | 103% | 104% | 105% |
|-----------------------------------------------|------|------|------|------|------|
| 12                                            | 2.2  | 1.6  | 1.2  | 0.82 | 0.68 |
| 24                                            | 4.3  | 3.3  | 2.2  | 1.6  | 1.5  |
| 48                                            | 10   | 6.8  | 4.8  | 3.9  | 3.5  |

Table 2

Trim Down Resistor Values (KΩ)

| Desired Vout<br>(%Vout)<br>Nom. Vout<br>(Vdc) | 90% | 92% | 94% | 96% | 98% |
|-----------------------------------------------|-----|-----|-----|-----|-----|
| 12                                            | 9   | 12  | 22  | 51  | 100 |
| 24                                            | 12  | 22  | 51  | 100 | 300 |
| 48                                            | 22  | 32  | 49  | 100 | 300 |

Note: 1. VFK400W-Q48-S12-DIN model requires minimum input voltage of 21.6 Vdc in order to trim between 100~105%.

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

## REVISION HISTORY

| rev. | description            | date       |
|------|------------------------|------------|
| 1.0  | initial release        | 01/03/2014 |
| 1.01 | changed DIN-rail mount | 06/16/2014 |

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC®**

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.