

LAYOUT INSPECTION

12



137.16±0.4


2.80±0.2

3.81±0.4

MIN 17.86
MAX 10.00

MIN 17.86

MAX 0.60

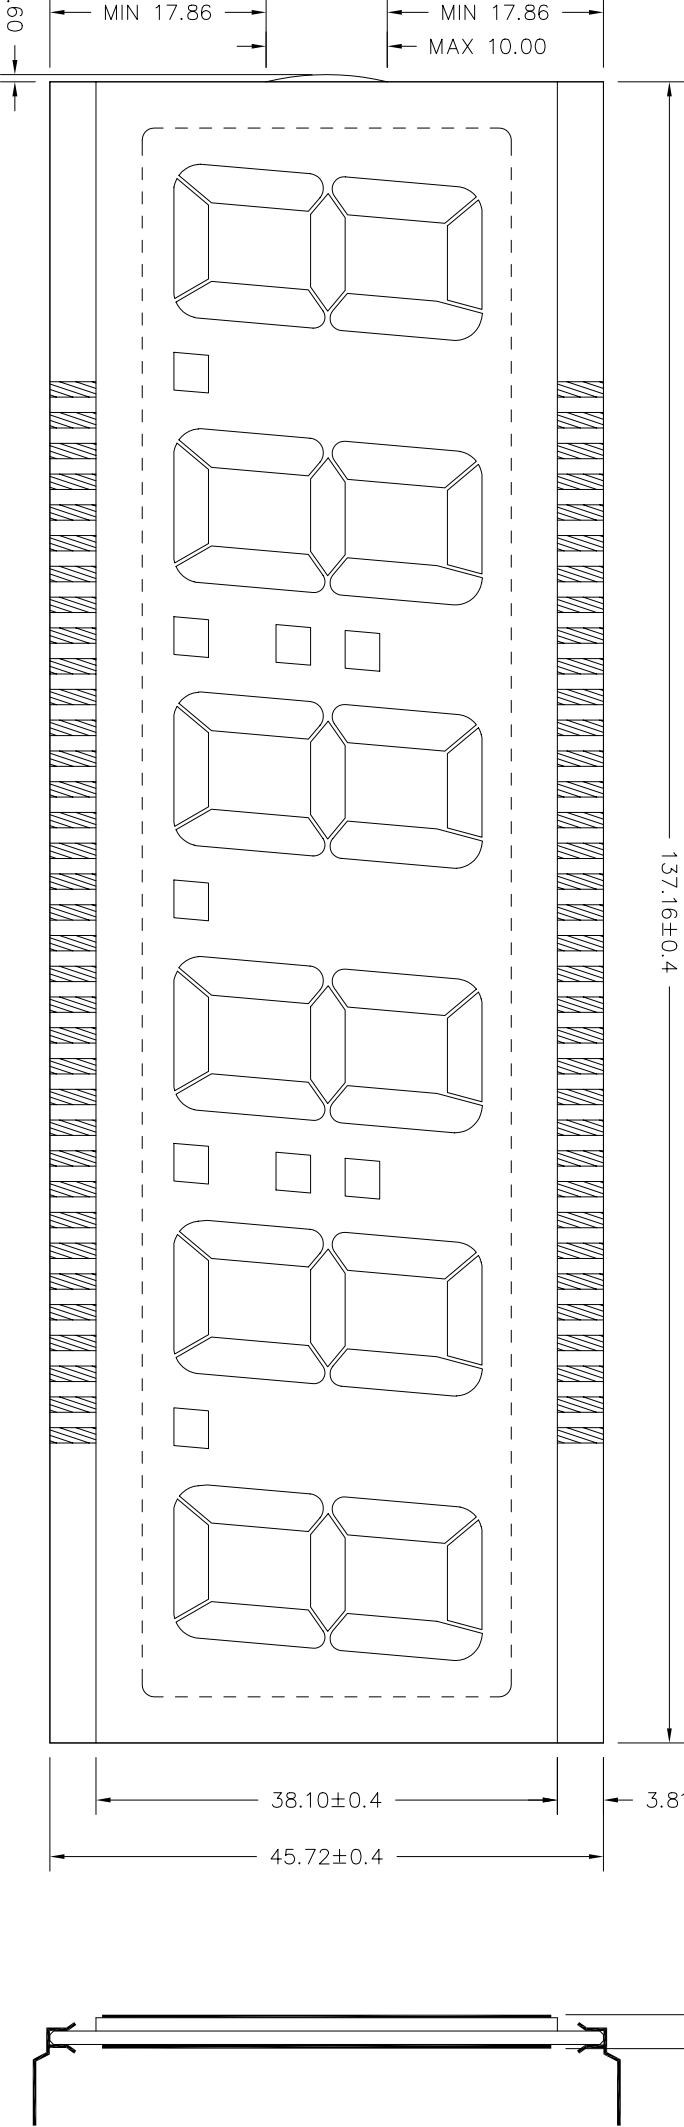

REMARKS: "◇" SPECIAL CHARACTERISTIC

"+" SAFETY CHARACTERISTIC


"()" REFERENCE ONLY

VARITRONIX LTD.		Dimension : mm		TOL : ±0.4 IF NOT SPECIFY	DO NOT SCALE DRAWING	3 rd ANGLE PROJECTION
DWGNO. :	REV	Drawn by : QMZ		SIGN :	Date : 2004-11-29	
VI-611-1	0	Checked by : YIN		SIGN :	Date :	


(MAX 3.81) →

$$-(\text{MIN V.A. } 129.54)$$

(BEVEL_EDGE(4X))

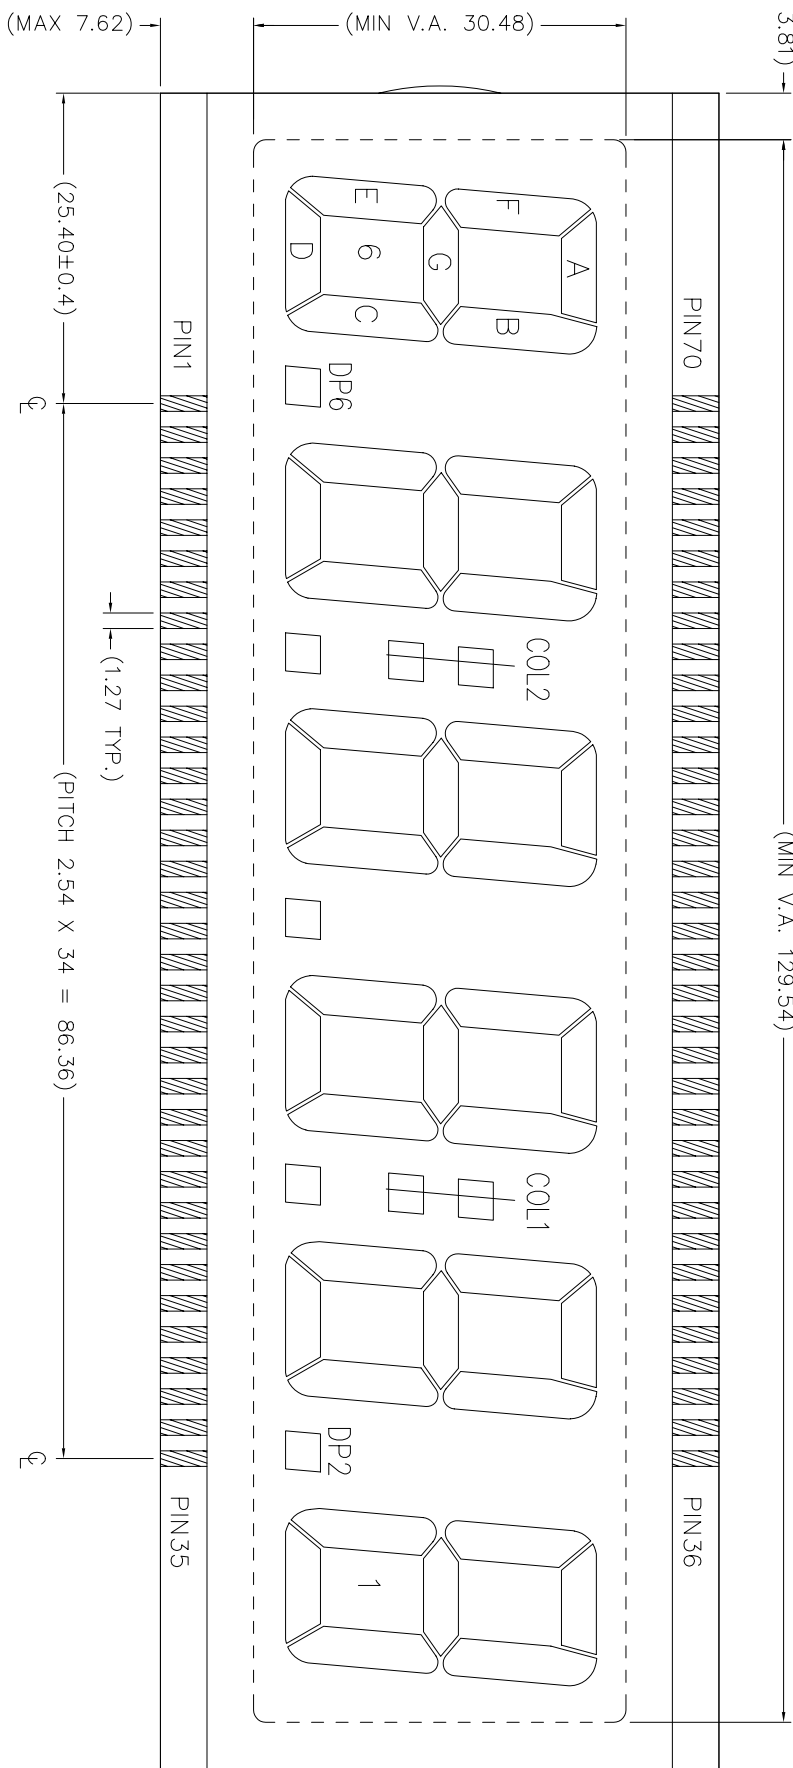


DWG.NO. : VI-611-1(REV.0)

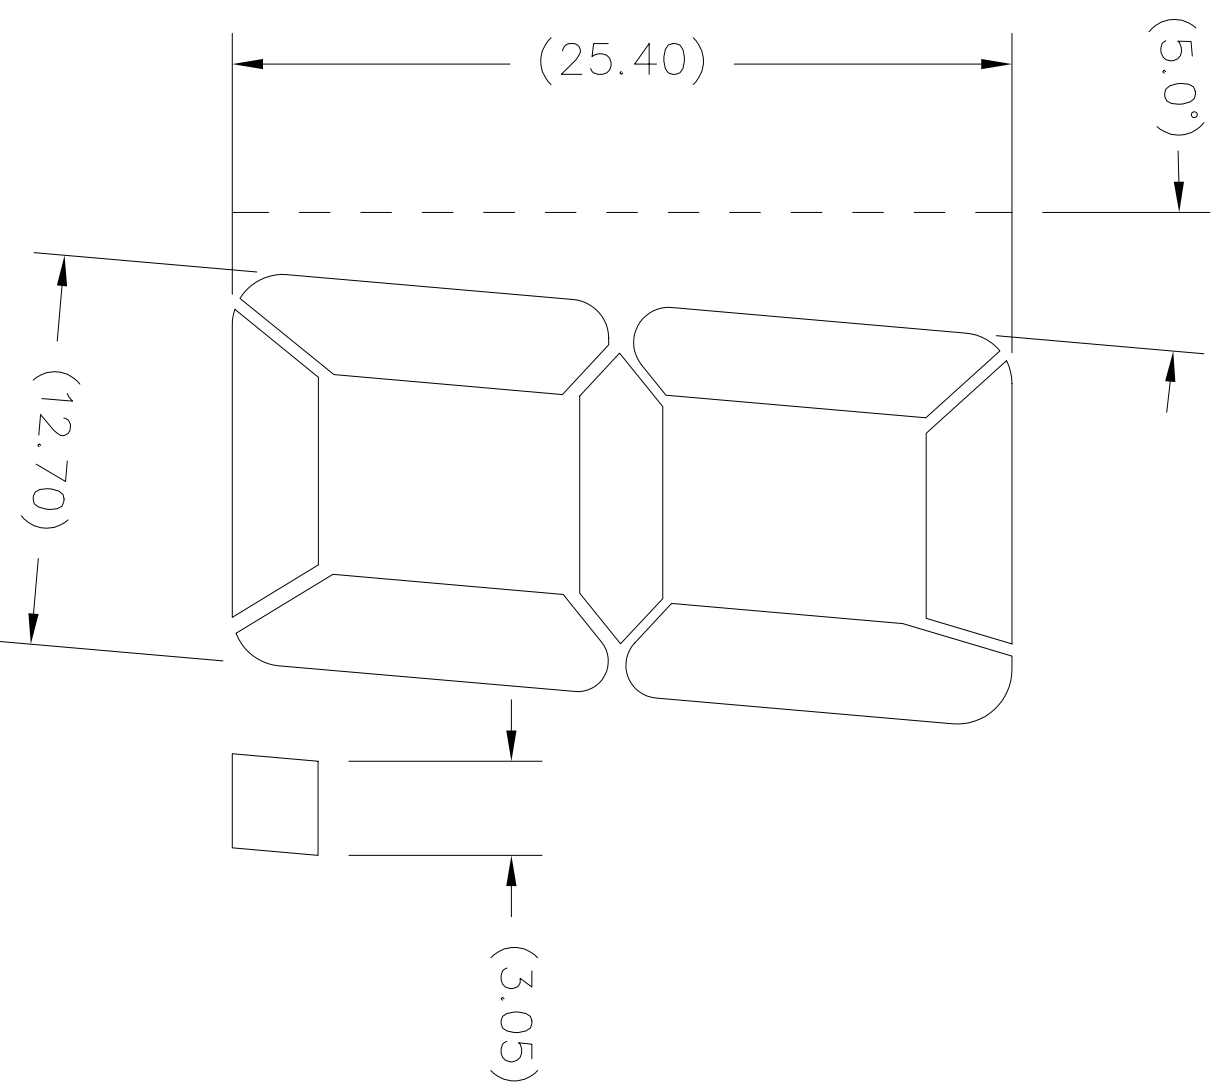


DWG. NO.: VI-611-1 (REV.0)

SEGMENT TRACKING

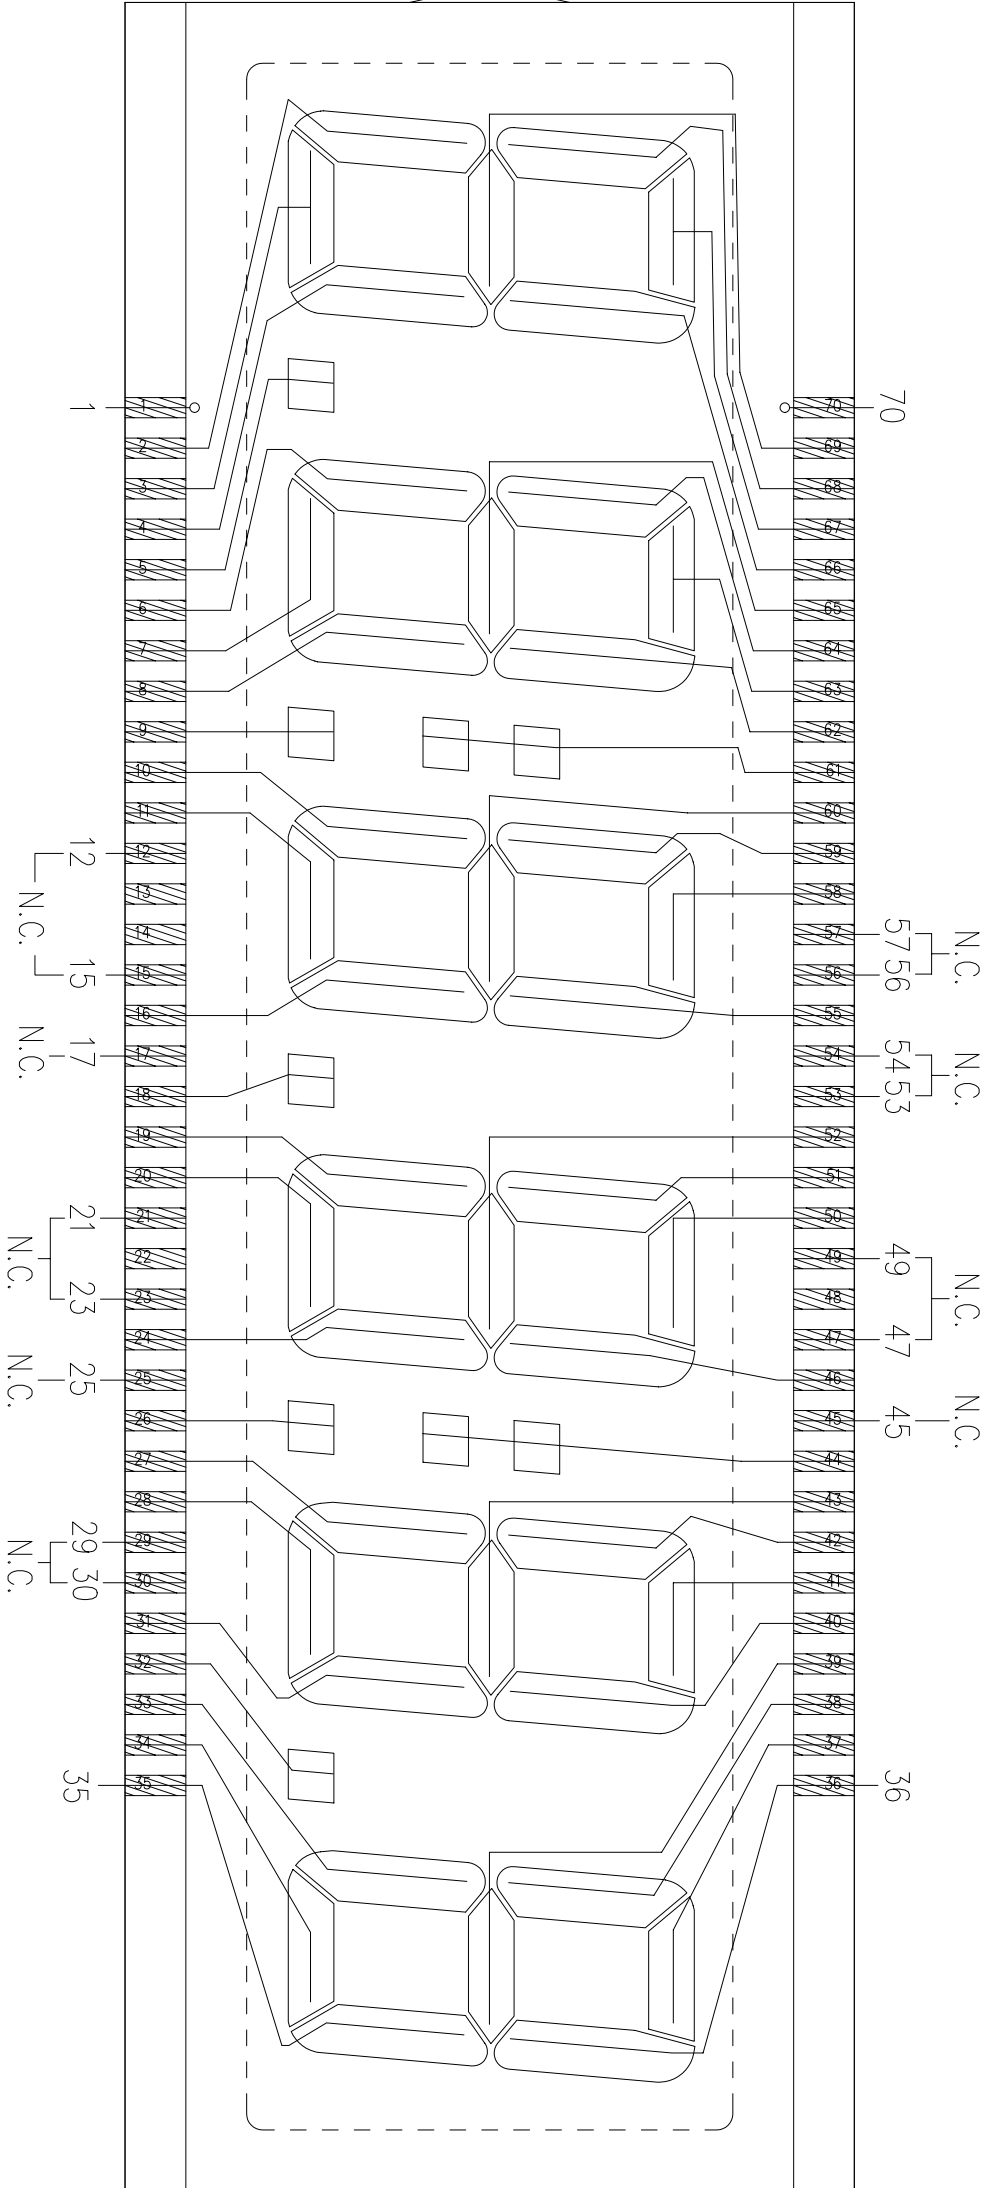

REMARKS: N.C. = NO CONNECTION


DWG. NO.: VI-611-1 (REV.0)
COMMON TRACKING

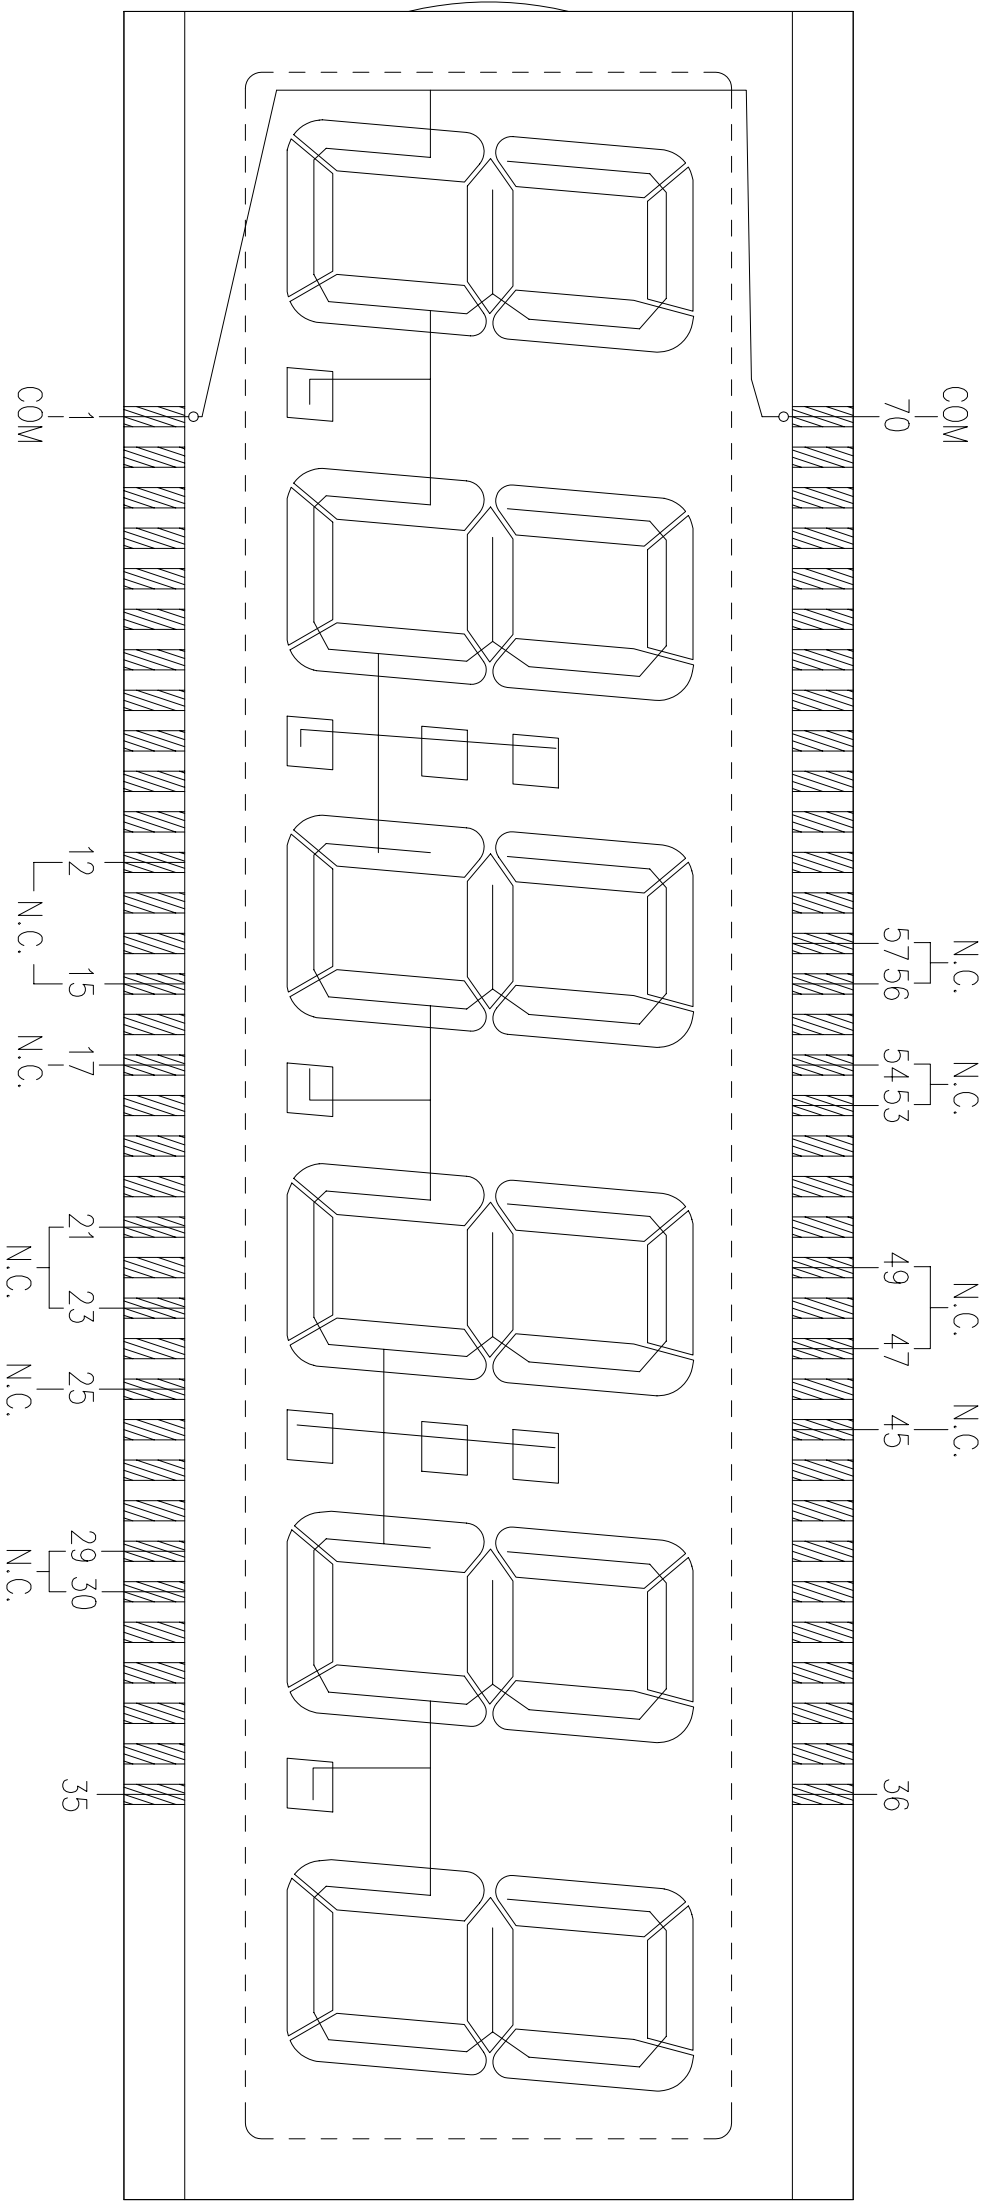



REMARKS : SAME COMMON SHOULD BE CONNECTED TOGETHER ON P.C.B.

N.C. = NO CONNECTION

VARTRONIX LIMITED		OPEN LAYER :	SCALE
POLARIZER LOCATION DIAGRAM		P	Do not scale
DOC. NO. : PL-VI-611-1-01		Drawn by : QWZ	Date : 2004-12-02
		Checked by : INA	Date : 2004-12-02
		Approval By :	Date : 2004-12-02

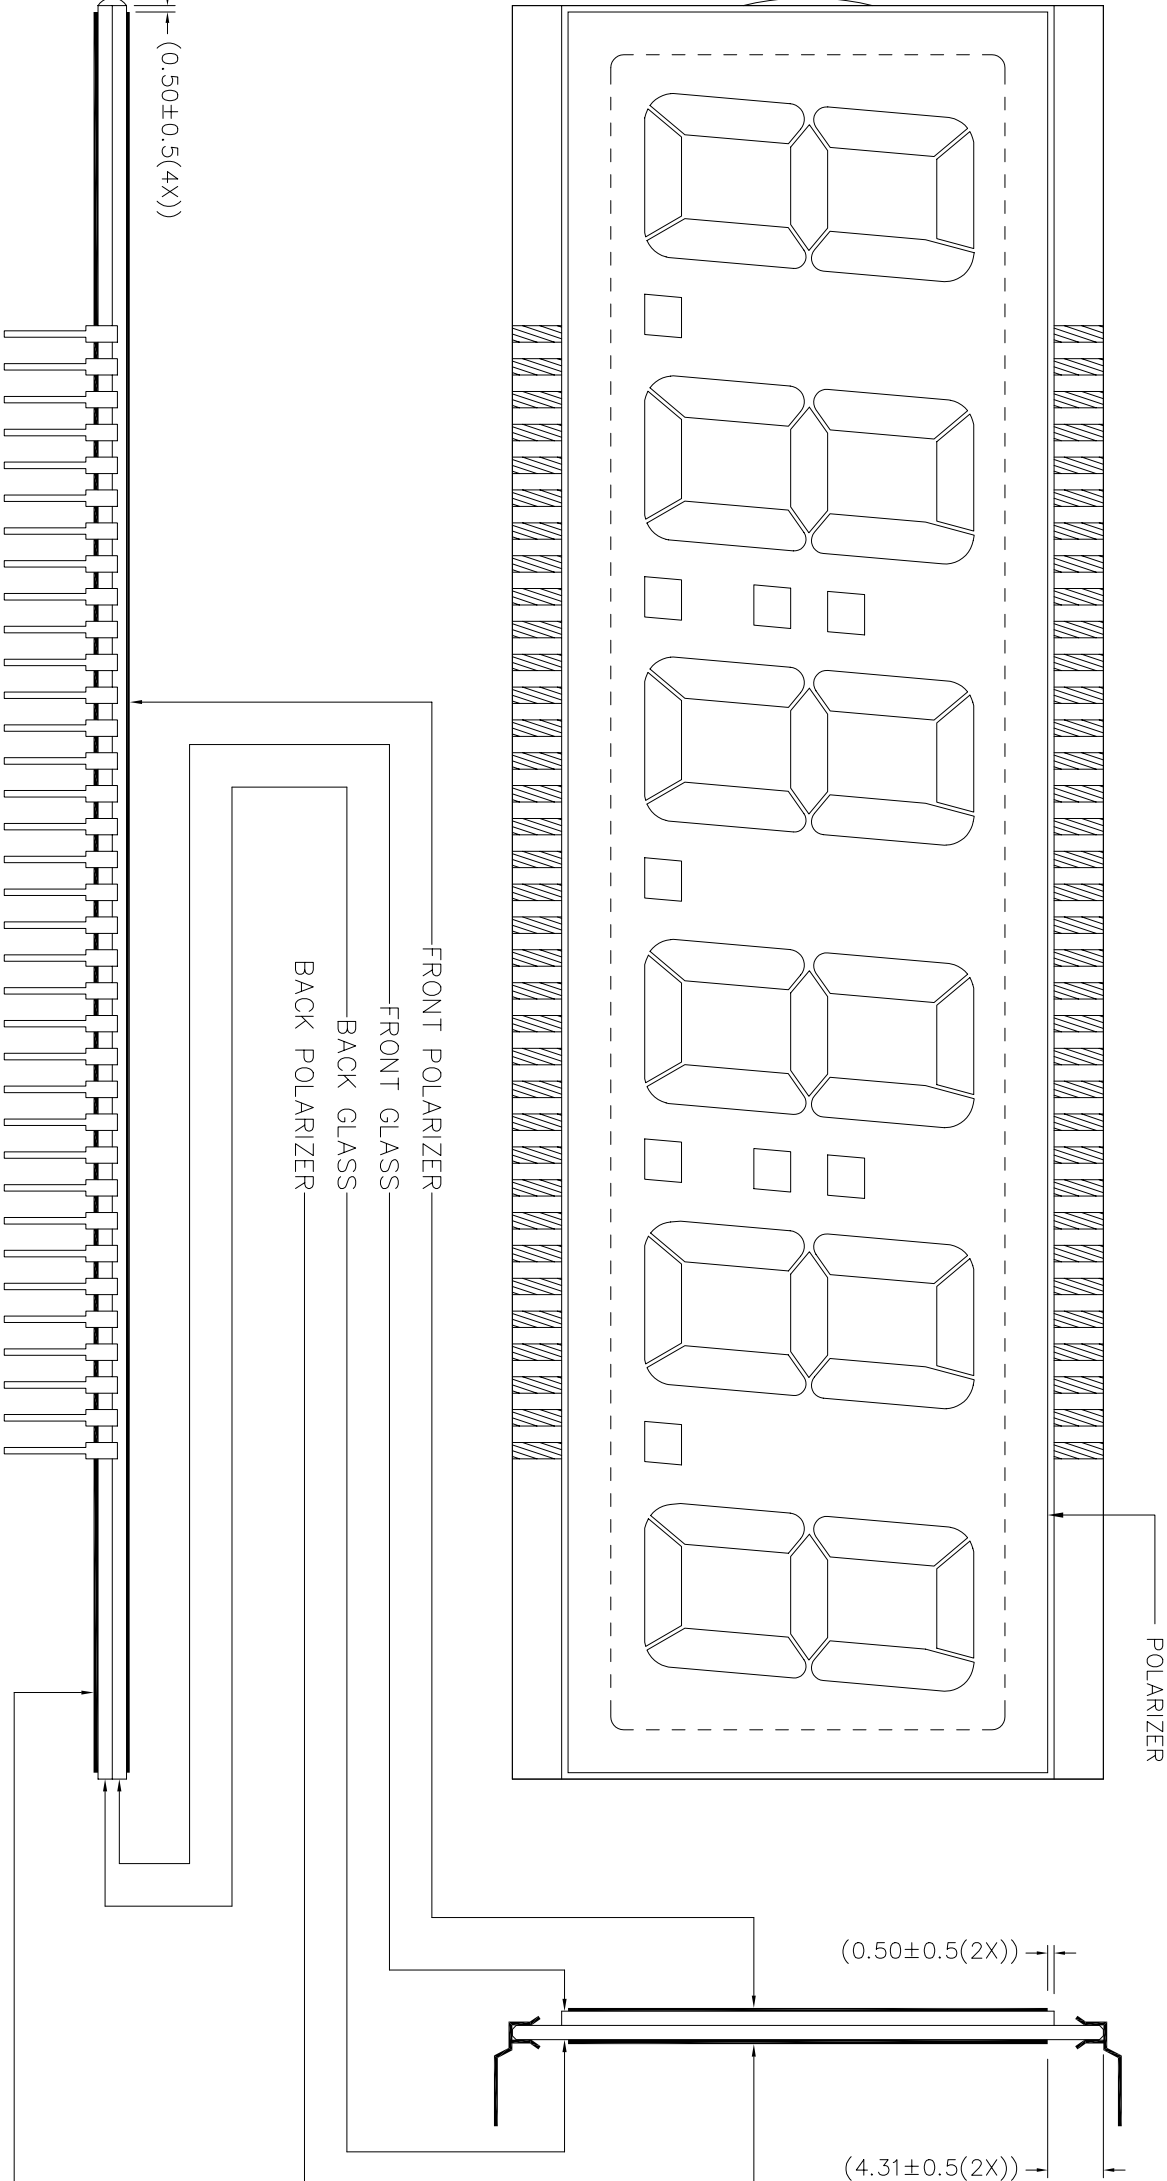

VARITRONIX LIMITED		OPEN LAYER : DP-LO	SCALE Do not scale
DIL-PIN DETAILS LOCATION DIAGRAM			
DOC. NO. : DP-VI-611-1-01		Drawn by : QMZ	Date : 2004-11-29
		Checked by : INA	Date : 2004-12-02
ALL DIMENSIONS IN mm		Approval by :	Date : 2004-12-02

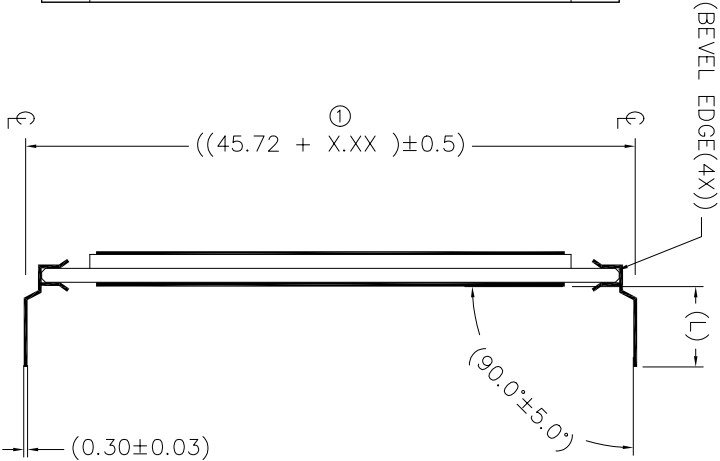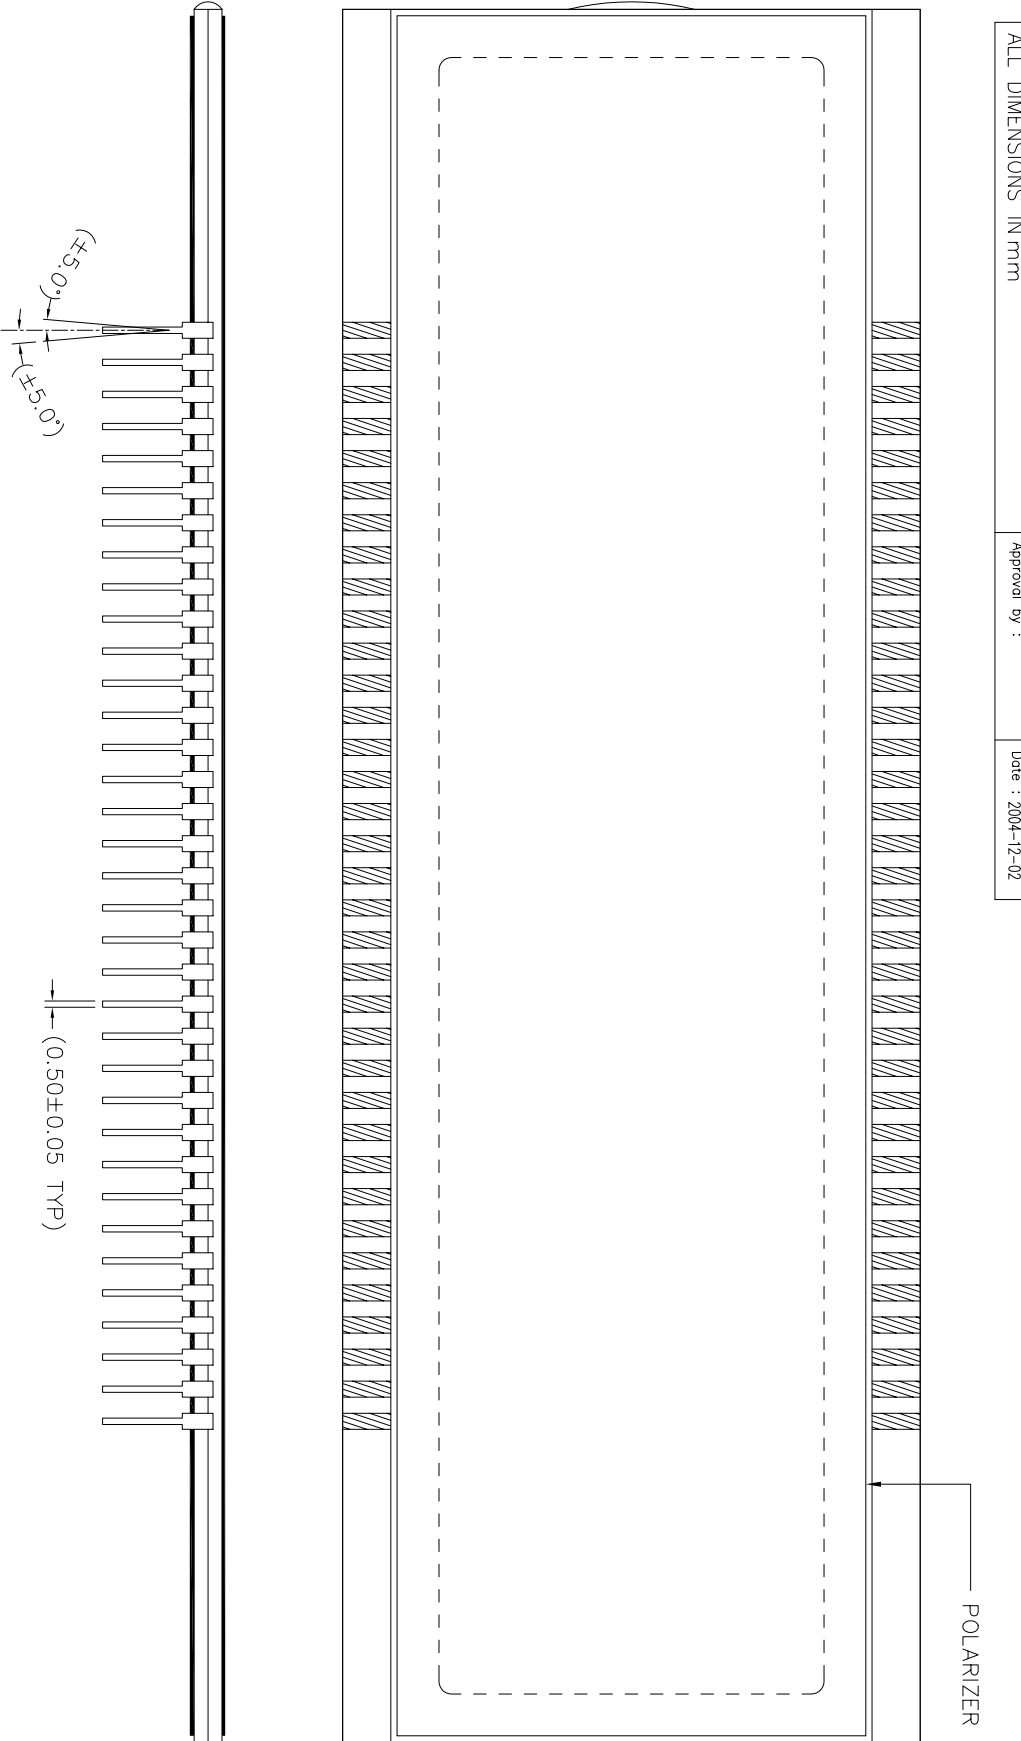

REMARKS: ① ----- X.XX=2.54 (FOR PIN LENGTH ≥ 3.2 & $\leq 10.00\text{mm}$)
X.XX=1.75 (FOR PIN LENGTH > 10.00 & $\leq 19.50\text{mm}$)
PIN LENGTH (L) REFER TO COVER PAGE

DWG.NO. : VI-611-1 (REV.0)

PIN	COM	PIN	COM	PIN	COM	PIN	COM
1	COM	19	3E	37	1A	55	4B
2	6E	20	3D	38	1F	56-57	N.C.
3	6D	21-23	N.C.	39	1G	58	4A
4	6C	24	3C	40	2B	59	4F
5	DP6	25	N.C.	41	2A	60	4G
6	5E	26	DP3	42	2F	61	COL2
7	5D	27	2E	43	2G	62	5B
8	5C	28	2D	44	COL1	63	5A
9	DP5	29-30	N.C.	45	N.C.	64	5F
10	4E	31	2C	46	3B	65	5G
11	4D	32	DP2	47-49	N.C.	66	6B
12-15	N.C.	33	1E	50	3A	67	6A
16	4C	34	1D	51	3F	68	6F
17	N.C.	35	1C	52	3G	69	6G
18	DP4	36	1B	53-54	N.C.	70	COM

REMARKS : SAME COMMON SHOULD BE CONNECTED TOGETHER ON P.C.B.
N.C. = NO CONNECTION