

# Standard Recovery Diodes (Stud Version), 12 A



PRODUCT SUMMARY			
I <sub>F(AV)</sub>	12 A		
Package	DO-203AA (DO-4)		
Circuit configuration	Single diode		

#### **FEATURES**

- · High surge current capability
- Stud cathode and stud anode version



- Wide current range
- Types up to 1200 V V<sub>RRM</sub>
- Designed and qualified for industrial and consumer level
- Material categorization: for definitions of compliance please see <a href="https://www.vishay.com/doc?99912"><u>www.vishay.com/doc?99912</u></a>

#### **TYPICAL APPLICATIONS**

- Battery charges
- Converters
- Power supplies
- Machine tool controls

MAJOR RATINGS AND CHARACTERISTICS					
PARAMETER	TEST CONDITIONS	VALUES	UNITS		
1		12	А		
I <sub>F(AV)</sub>	T <sub>C</sub>	144	°C		
I <sub>F(RMS)</sub>		19	А		
I <sub>FSM</sub>	50 Hz	265	Λ		
	60 Hz	280	Α		
l <sup>2</sup> t	50 Hz	351	A <sup>2</sup> s		
	60 Hz	320	A-S		
V <sub>RRM</sub>	Range	100 to 1200	V		
T <sub>J</sub>		-65 to +175	°C		

#### **ELECTRICAL SPECIFICATIONS**

VOLTAGE RATINGS					
TYPE NUMBER	VOLTAGE CODE	V <sub>RRM</sub> , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V <sub>RSM</sub> , MAXIMUM NON-REPETITIVE PEAK VOLTAGE V	I <sub>RRM</sub> MAXIMUM AT T <sub>J</sub> = 175 °C mA	
	10	100	150		
	20	200	275		
	40	400	500		
VS-12F(R)	60	600	725	12	
	80	800	950		
	100	1000	1200		
	120	1200	1400		



FORWARD CONDUCTION						
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNITS
Maximum average forward current	le.a.a	180° conduction, half sine wave			12	А
at case temperature	I <sub>F(AV)</sub>	100 conduc	otion, nan sine we	100	144	°C
Maximum RMS forward current	I <sub>F(RMS)</sub>				19	Α
		t = 10 ms	No voltage		265	A A
Maximum peak, one-cycle forward,		t = 8.3 ms	reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	280	
non-repetitive surge current	I <sub>FSM</sub>	t = 10 ms	100 % V <sub>RRM</sub>		225	
		t = 8.3 ms	reapplied		235	
Maximum I <sup>2</sup> t for fusing	l <sup>2</sup> t	t = 10 ms	No voltage reapplied		351	
		t = 8.3 ms			320	
		t = 10 ms	100 % V <sub>RRM</sub> reapplied		250	
		t = 8.3 ms			226	
Maximum I <sup>2</sup> √t for fusing	I²√t	t = 0.1 to 10 ms, no voltage reapplied			3510	A²√s
Low level value of threshold voltage	V <sub>F(TO)1</sub>	(16.7 % x $\pi$ x $I_{F(AV)}$ < I < $\pi$ x $I_{F(AV)}$ ), $T_J = T_J$ maximum			0.77	V
High level value of threshold voltage	V <sub>F(TO)2</sub>	$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ maximum}$			0.97	V
Low level value of forward slope resistance	r <sub>f1</sub>	(16.7 % x $\pi$ x $I_{F(AV)}$ < $I$ < $\pi$ x $I_{F(AV)}$ ), $T_J = T_J$ maximum			10.70	mΩ
High level value of forward slope resistance	r <sub>f2</sub>	$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ maximum}$			6.20	1/152
Maximum forward voltage drop	$V_{FM}$	$I_{pk} = 38 \text{ A, T}$	$J = 25  ^{\circ}\text{C},  t_p = 40$	0 μs rectangular wave	1.26	V


THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Maximum junction operating temperature range	T <sub>J</sub> -65		-65 to +175	°C	
Maximum storage temperature range	$T_{Stg}$	-6			
Maximum thermal resistance, junction to case	$R_{thJC}$	DC operation	2	K/W	
Maximum thermal resistance, case to heatsink	R <sub>thCS</sub>	Mounting surface, smooth, flat and greased	0.5		
		Not lubricated threads	1.5 + 0 - 10 %	N⋅m	
Allowable mounting torque		Not lublicated tilleads	13	lbf ⋅ in	
Allowable mounting torque		Lubricated threads	1.2 + 0 - 10 %	N⋅m	
		Lubricated tilleads	10	lbf ⋅ in	
Approximate weight			7	g	
Approximate weight			0.25	OZ.	
Case style		See dimensions - link at the end of datasheet	DO-203AA	A (DO-4)	

△R <sub>th</sub> JC CONDUCTION					
CONDUCTION ANGLE	SINUSOIDAL CONDUCTION	RECTANGULAR CONDUCTION	TEST CONDITIONS	UNITS	
180°	0.33	0.26			
120°	0.41	0.44			
90°	0.53	0.58	$T_J = T_J$ maximum	K/W	
60°	0.78	0.81			
30°	1.28	1.29			

#### Note

• The table above shows the increment of thermal resistance R<sub>thJC</sub> when devices operate at different conduction angles than DC








Fig. 1 - Current Ratings Characteristics

Fig. 2 - Current Ratings Characteristics

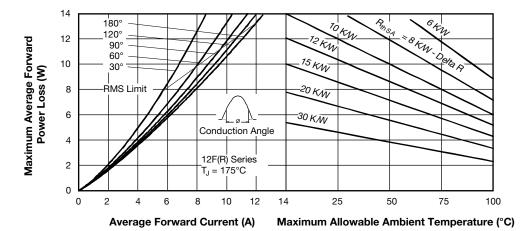


Fig. 3 - Forward Power Loss Characteristics

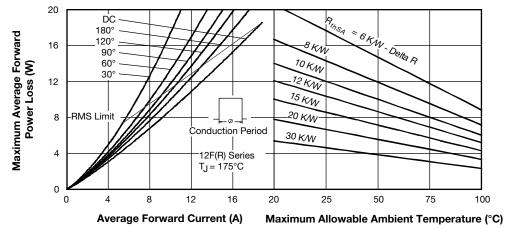


Fig. 4 - Forward Power Loss Characteristics

#### www.vishay.com

## Vishay Semiconductors




Fig. 5 - Maximum Non-Repetitive Surge Current




Fig. 6 - Maximum Non-Repetitive Surge Current




Fig. 7 - Forward Voltage Drop Characteristics




Fig. 8 - Thermal Impedance Z<sub>thJC</sub> Characteristics

## ORDERING INFORMATION TABLE

Device code	VS-	12	F	R	120	М
	(1)	(2)	(3)	4)	(5)	<u>(6)</u>

- 1 Vishay Semiconductors product
- 2 Current rating: code = I<sub>F(AV)</sub>
- 3 F = standard device
- None = stud normal polarity (cathode to stud)

  R = stud reverse polarity (anode to stud)
- 5 Voltage code x 10 = V<sub>RRM</sub> (see Voltage Ratings table)
- 6 None = stud base DO-203AA (DO-4) 10-32UNF-2A


M = stud base DO-203AA (DO-4) M5 x 0.8


LINKS TO RELATED DOCUMENTS			
Dimensions	www.vishay.com/doc?95311		




# DO-203AA (DO-4)

#### **DIMENSIONS** in millimeters (inches)

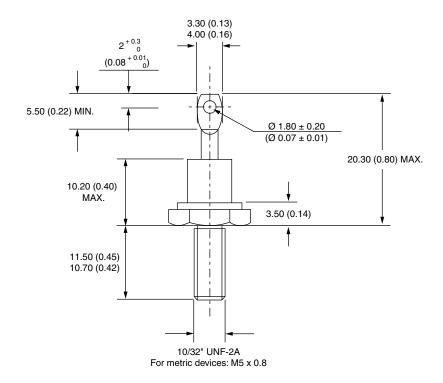

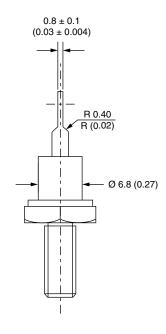





## **Legal Disclaimer Notice**

Vishay

#### **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Revision: 13-Jun-16 1 Document Number: 91000

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vishay:

<u>VS-12FR10 VS-12F40 12F60M VS-12FR120 VS-12F10 VS-12F100 VS-12F120 VS-12F20 VS-12F60 VS-12F80 VS-12FR100 VS-12FR20 VS-12FR40 VS-12FR80 VS-12FR80 VS-12FR20 VS-12FR40 VS-12FR80 VS-12FR80 VS-12FR20 VS-12FR40 VS-12FR80 VS-12FR80 VS-12FR20 VS-12FR80 VS-12FR80 VS-12FR80 VS-12FR20 VS-12FR80 V</u>