



40CTQ045SPbF
40CTQ045-1PbF

SCHOTTKY RECTIFIER

40 Amp

$$I_{F(AV)} = 40\text{Amp}$$
$$V_R = 45\text{V}$$

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	40	A
V_{RRM}	45	V
I_{FSM} @ tp = 5 μ s sine	1240	A
V_F @20Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.48	V
T_J range	-55 to 150	$^\circ\text{C}$


Description/ Features

This center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- Center tap configuration
- Very low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)


Case Styles

40CTQ045SPbF



D²PAK

40CTQ045-1PbF



TO-262

Voltage Ratings

Parameters	40CTQ045SPbF 40CTQ045-1PbF
V_R Max. DC Reverse Voltage (V)	45
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward (Per Leg) Current * See Fig. 5 (Per Device)	20 40	A	50% duty cycle @ $T_C = 116^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	1240 350	A	5 μs Sine or 3 μs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_{RRM} applied
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	20	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 3\text{ Amps}$, $L = 4.40\text{ mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.53	V	@ 20A $T_J = 25^\circ\text{C}$
	0.68	V	@ 40A
	0.48	V	@ 20A $T_J = 125^\circ\text{C}$
	0.67	V	@ 40A
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	3	mA	$T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_R$
	115	mA	$T_J = 125^\circ\text{C}$
$V_{F(TO)}$ Threshold Voltage	0.27	V	$T_J = T_J \text{ max.}$
r_t Forward Slope Resistance	8.72	m Ω	
C_T Max. Junction Capacitance (Per Leg)	2800	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance (Per Leg)	8.0	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters		Values	Units	Conditions
T _J	Max. Junction Temperature Range	-55 to 150	°C	
T _{stg}	Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Leg)	2.0	°C/W	DC operation
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Package)	1.0	°C/W	DC operation
R _{thCS}	Typical Thermal Resistance, Case to Heatsink	0.50	°C/W	Mounting surface , smooth and greased (only for TO-220)
wt	Approximate Weight	2 (0.07)	g (oz.)	
T	Mounting Torque	Min. 6 (5)	Kg-cm (lbf-in)	
		Max. 12 (10)		
Marking Device		40CTQ045S	Case style D ² Pak	
		40CTQ045-1	Case style TO-262	

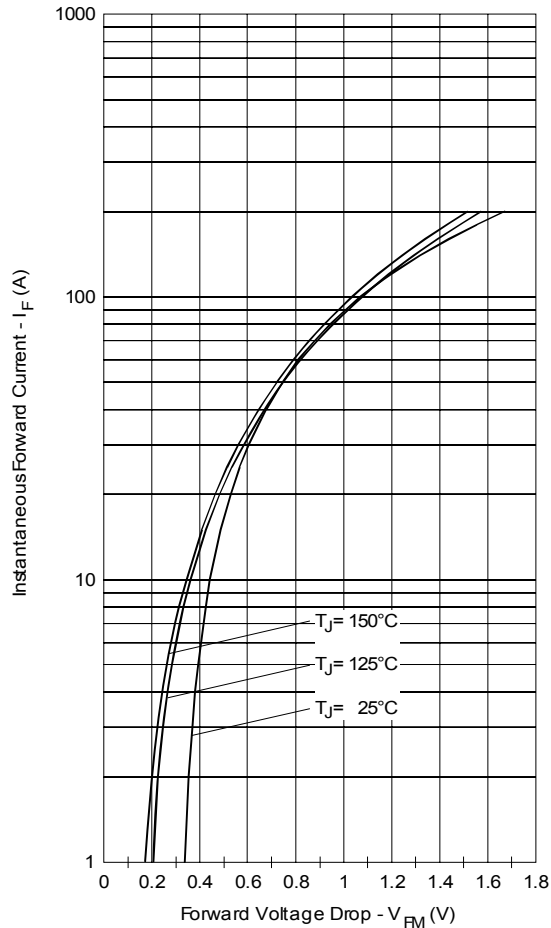


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

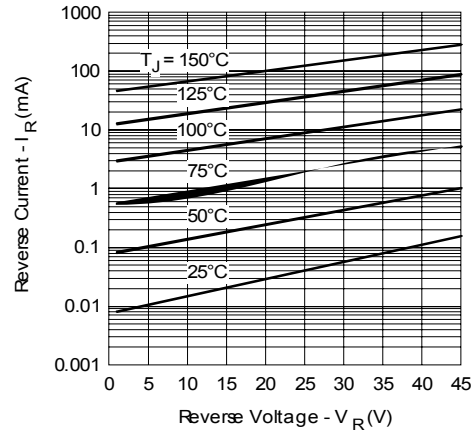


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

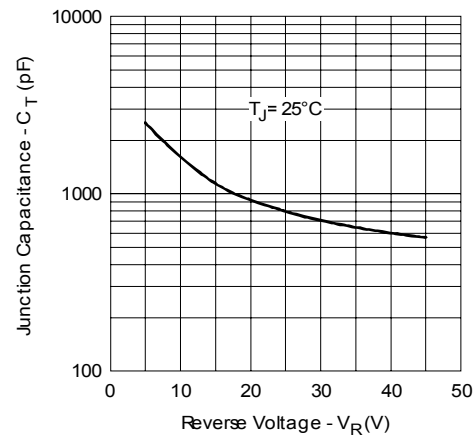


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

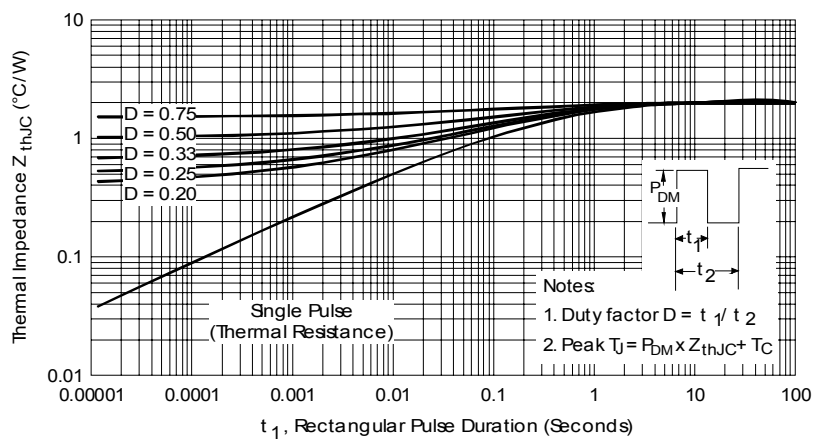


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

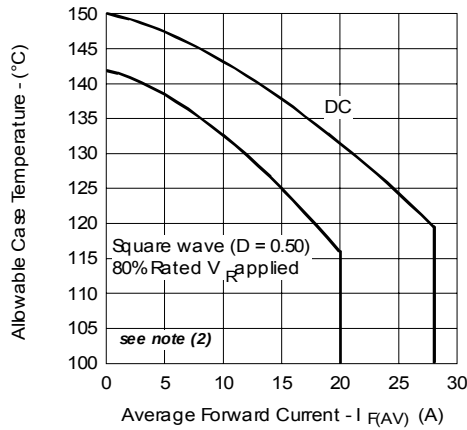


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

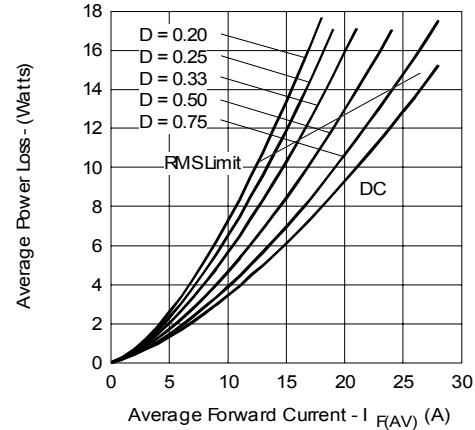


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

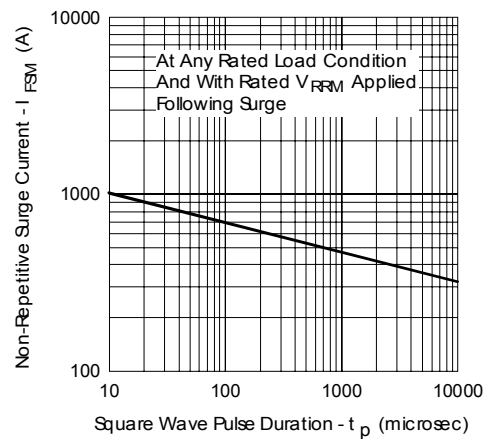


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

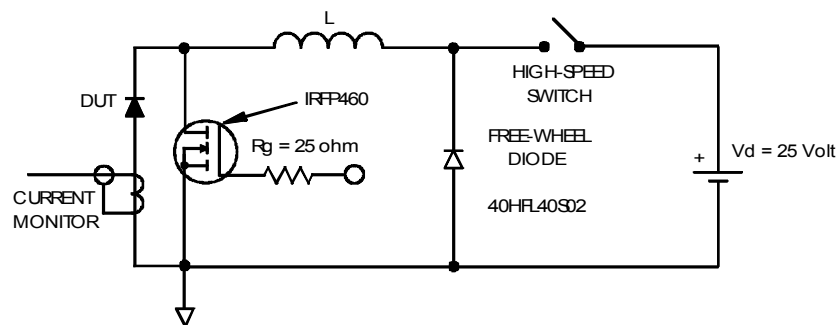




Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;

Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 10$ V

Outlines Table

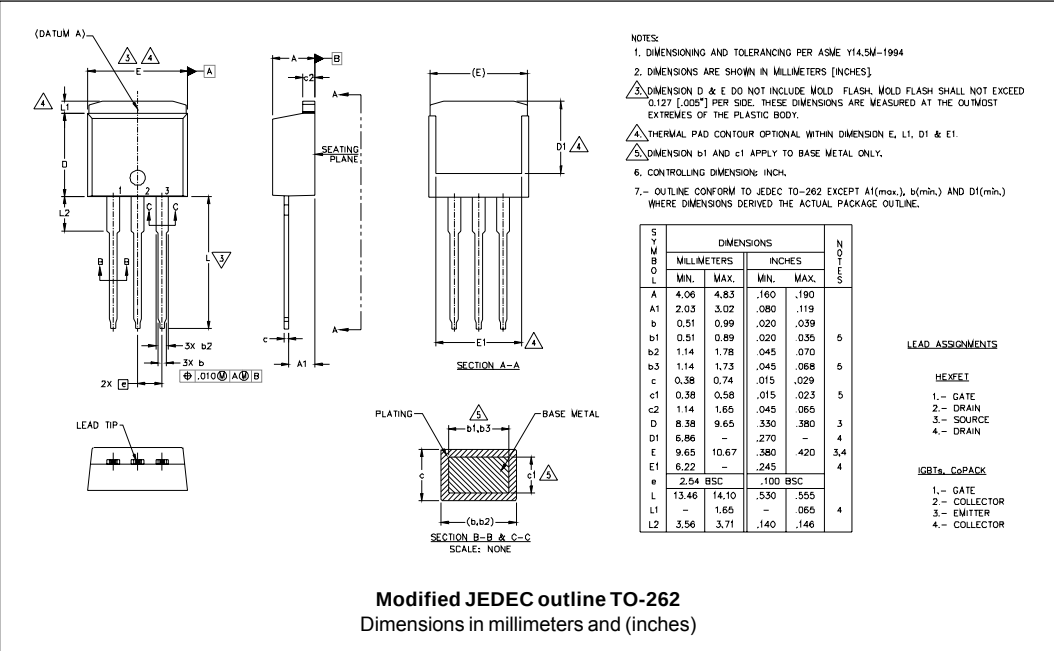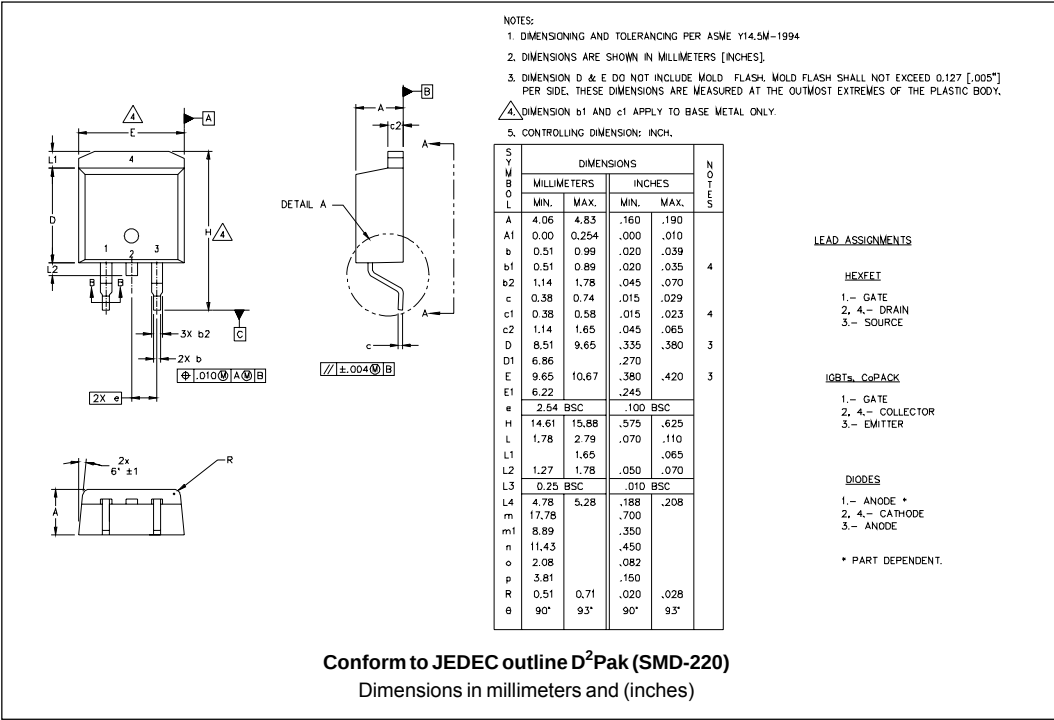


Part Marking Information

D²PAK

EXAMPLE: THIS IS A 40CTQ045S
LOT CODE 8024
ASSEMBLED ON WW 02, 2001

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL
RECTIFIER
LOGO



PART NUMBER

DATE CODE


YEAR 1 = 2001
WEEK 02
P = LEAD-FREE

TO-262

EXAMPLE: THIS IS A 40CTQ045-1
LOT CODE 1789
ASSEMBLED ON WW 19, 2002

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL
RECTIFIER
LOGO




PART NUMBER

DATE CODE

YEAR 2 = 2002
WEEK 19
P = LEAD-FREE

Tape & Reel Information

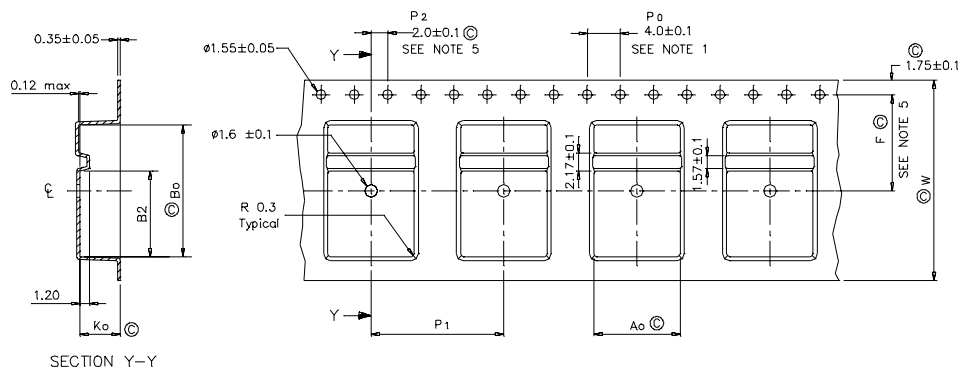

NOTES:

- 1.0 10 SPROCKET HOLE PITH CUMULATIVE TOLERANCE ± 0.02
2.0 CAMBER NOT TO EXCEED 1mm in 100mm
3.0 MATERIAL: CONDUCTIVE BLACK STYRENIC ALLOY
4.0 K₀ MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
6.0 VENDOR: (OPTIONAL)
7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10^6 OHMS PER SQUARE. MEASUREMENT PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
10.0 © CRITICAL

Dimensions in millimeters and (inches)

Ao	10.50 +/− 0.1
Bo	15.80 +/− 0.1
B2	10.25 +/− 0.1
Ko	4.90 +/− 0.1
F	11.50 +/− 0.1
P ₁	16.00 +/− 0.1
W	24.00 +/− 0.3

Ordering Information Table

Device Code							
40	C	T	Q	045	S	TRL	PbF
1	2	3	4	5	6	7	8
1	-	Current Rating (40A)					
2	-	Circuit Configuration					
		C = Common Cathode					
3	-	T = TO-220					
4	-	Schottky "Q" Series					
5	-	Voltage Rating (045 = 45V)					
6	-	- S = D²Pak -1= TO-262					
7	-	- none = Tube (50 pieces) - TRL = Tape & Reel (Left Oriented - for D²Pak only) - TRR = Tape & Reel (Right Oriented - for D²Pak only)					
8	-	- none = Standard Production - PbF = Lead-Free					

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level and Lead-Free.
 Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
 TAC Fax: (310) 252-7309
 07/06



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.