

## Standard Recovery Diodes, (Stud Version), 85 A



DO-203AB (DO-5)



### FEATURES

- High surge current capability
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600 V  $V_{RRM}$
- Designed and qualified for industrial level
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

### TYPICAL APPLICATIONS

- Battery chargers
- Converters
- Power supplies
- Machine tool controls
- Welding

PRODUCT SUMMARY	
$I_{F(AV)}$	85 A
Package	DO-203AB (DO-5)
Circuit configuration	Single diode

MAJOR RATINGS AND CHARACTERISTICS				
PARAMETER	TEST CONDITIONS	85HF(R)		UNITS
		10 to 120	140 to 160	
$I_{F(AV)}$		85	85	A
	$T_C$	140	110	°C
$I_{F(RMS)}$		133	133	A
$I_{FSM}$	50 Hz	1700	1700	A
	60 Hz	1800	1800	
$I^2t$	50 Hz	14 500	14 500	$A^2s$
	60 Hz	13 500	13 500	
$V_{RRM}$	Range	100 to 1200	1400 to 1600	V
$T_J$		-65 to +180	-65 to +150	°C

### ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ MAXIMUM AT $T_J = T_J$ MAXIMUM mA
VS-85HF(R)	10	100	200	9
	20	200	300	
	40	400	500	
	60	600	700	
	80	800	900	
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	4.5
	160	1600	1700	

<b>FORWARD CONDUCTION</b>						
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TEST CONDITIONS</b>			<b>85HF(R)</b>	<b>UNITS</b>
		<b>10 to 120</b>	<b>140/160</b>			
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave			85	A
Maximum RMS forward current		140	110			°C
Maximum peak, one-cycle forward, non-repetitive surge current	$I_{FSM}$	$t = 10 \text{ ms}$	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	1700	A
		$t = 8.3 \text{ ms}$			1800	
Maximum $I^2t$ for fusing	$I^2t$	$t = 10 \text{ ms}$	100 % $V_{RRM}$ reapplied		1450	$A^2s$
		$t = 8.3 \text{ ms}$			1500	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 10 \text{ ms}$	No voltage reapplied	14 500	14 500	$A^2\sqrt{s}$
Value of threshold voltage (up to 1200 V)		$t = 8.3 \text{ ms}$			13 500	
Value of threshold voltage (for 1400 V, 1600 V)	$V_{F(TO)}$	$t = 10 \text{ ms}$	100 % $V_{RRM}$ reapplied		10 500	V
Value of forward slope resistance (up to 1200 V)		$t = 8.3 \text{ ms}$			9400	
Value of forward slope resistance (for 1400 V, 1600 V)	$r_f$	$T_J = T_J$ maximum			1.62	mW
Maximum forward voltage drop		$V_{FM}$	$I_{pk} = 267 \text{ A}$ , $T_J = 25 \text{ °C}$ , $t_p = 400 \mu\text{s}$ rectangular wave		1.75	
				1.2	1.4	V

<b>THERMAL AND MECHANICAL SPECIFICATIONS</b>						
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TEST CONDITIONS</b>			<b>85HF(R)</b>	<b>UNITS</b>
		<b>10 to 20</b>	<b>140 to 160</b>			
Maximum junction operating and storage temperature range	$T_J$ , $T_{Stg}$			-65 to +180	-65 to +150	°C
Maximum thermal resistance, junction to case	$R_{thJC}$	DC operation		0.35		K/W
Maximum thermal resistance, case to heatsink	$R_{thCS}$	Mounting surface, smooth, flat and greased		0.25		
Maximum shock <sup>(1)</sup>				1500		g
Maximum constant vibration <sup>(1)</sup>		50 Hz		20		
Maximum constant acceleration <sup>(1)</sup>		Stud outwards		5000		N · m (lbf · in)
Maximum allowable mounting torque + 0 %, - 10 %		Not lubricated thread, tightening on nut		3.4 (30)		
		Lubricated thread, tightening on nut		2.3 (20)		
		Not lubricated thread, tightening on hexagon		4.2 (37)		
		Lubricated thread, tightening on hexagon		3.2 (28)		
Approximate weight		Unleaded device		17	g	oz.
Case style		See dimensions - link at the end of datasheet		0.6		
					DO-203AB (DO-5)	

**Notes**

- (1) Available only for 88HF
- (2) Recommended for pass-through holes
- (3) Recommended for holed threaded heatsinks

<b><math>\Delta R_{thJC}</math> CONDUCTION</b>				<b>TEST CONDITIONS</b>	<b>UNITS</b>
CONDUCTION ANGLE	SINUSOIDAL CONDUCTION	RECTANGULAR CONDUCTION			
180°	0.10	0.08			
120°	0.11	0.11			
90°	0.13	0.13			
60°	0.17	0.17			
30°	0.26	0.26			

**Note**

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

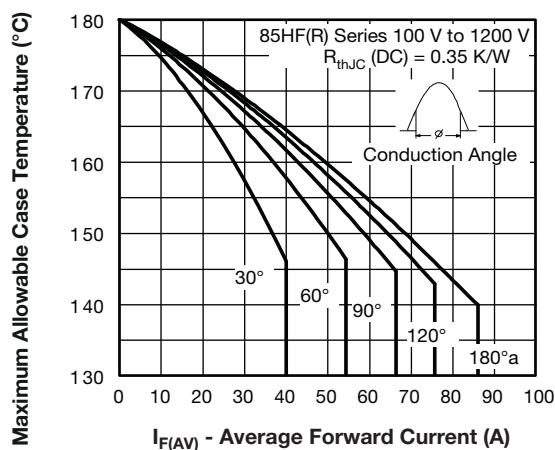


Fig. 1 - Current Ratings Characteristics

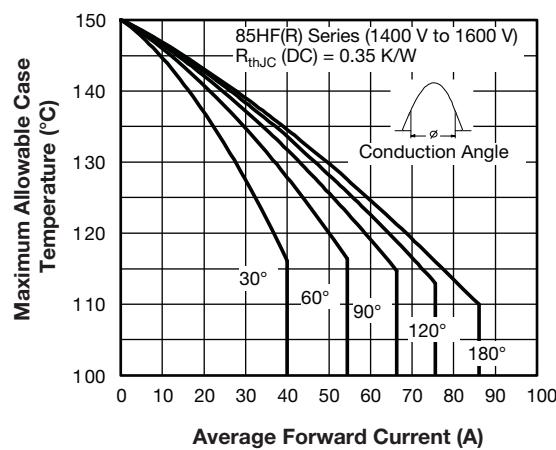


Fig. 3 - Current Ratings Characteristics

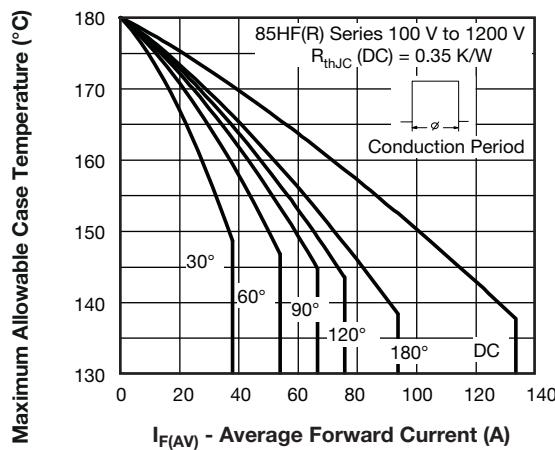


Fig. 2 - Current Ratings Characteristics

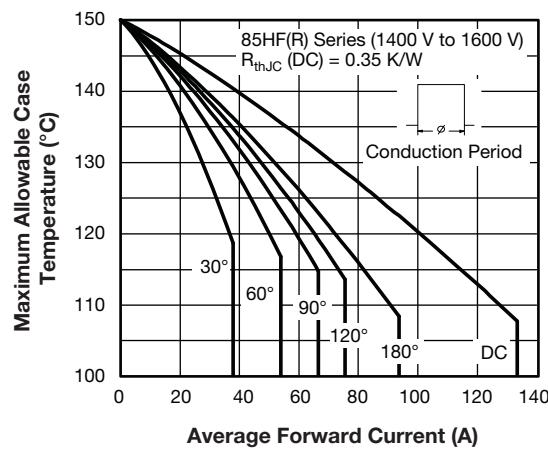


Fig. 4 - Current Ratings Characteristics

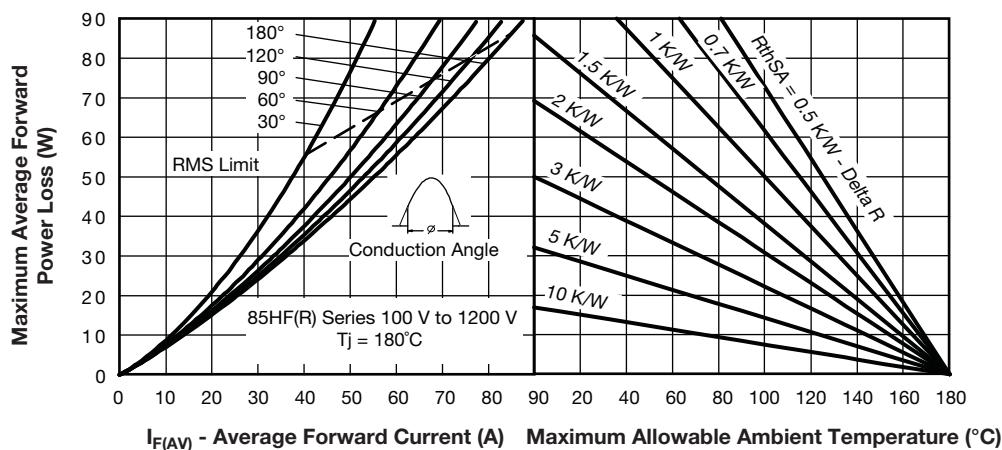


Fig. 5 - Forward Power Loss Characteristics

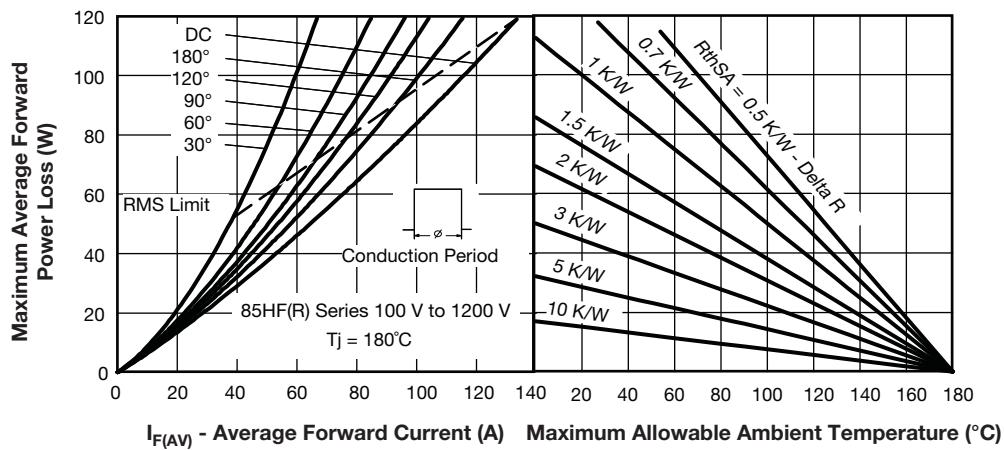


Fig. 6 - Forward Power Loss Characteristics

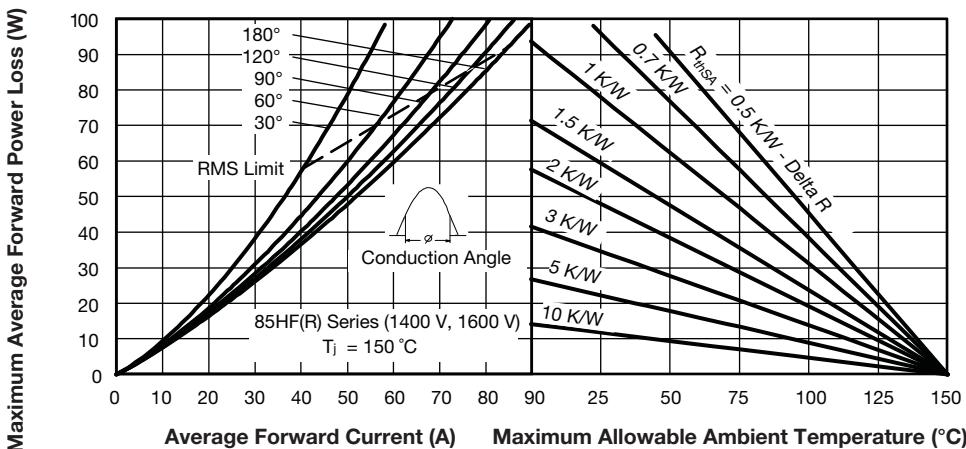


Fig. 7 - Forward Power Loss Characteristics

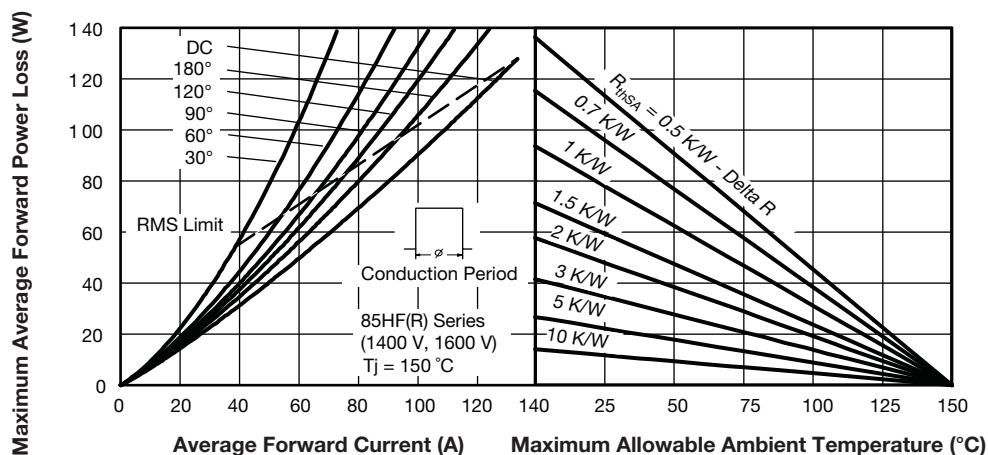


Fig. 8 - Forward Power Loss Characteristics

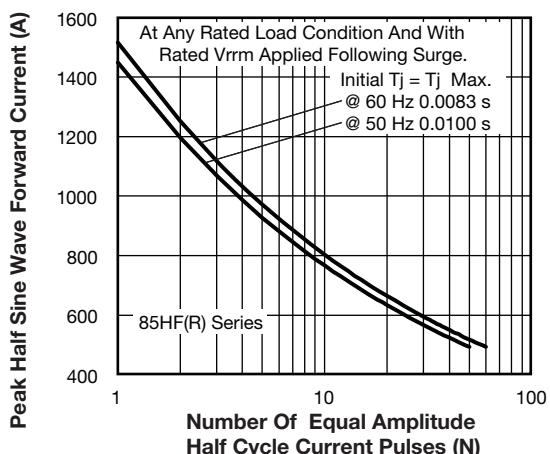


Fig. 9 - Maximum Non-Repetitive Surge Current

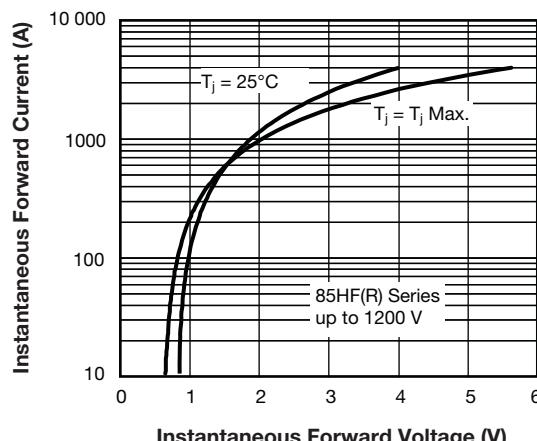


Fig. 11 - Forward Voltage Drop Characteristics

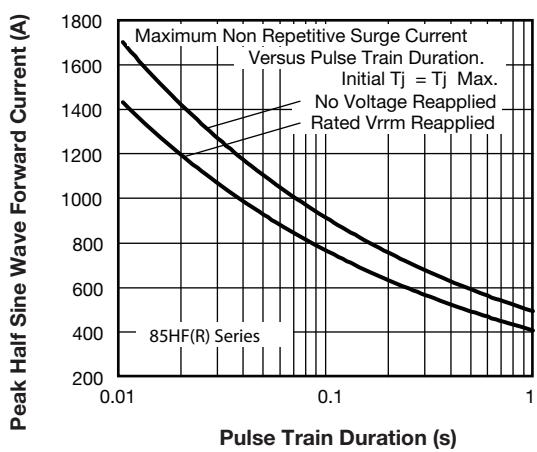


Fig. 10 - Maximum Non-Repetitive Surge Current

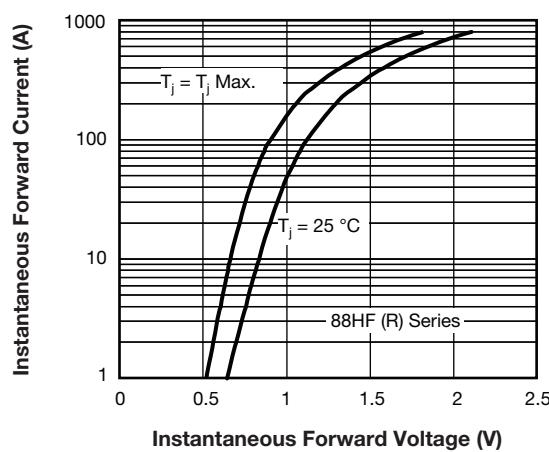


Fig. 12 - Forward Voltage Drop Characteristics

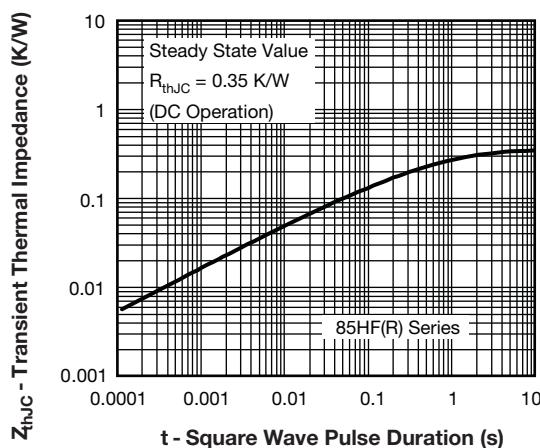


Fig. 13 - Thermal Impedance  $Z_{thJC}$  Characteristics

## ORDERING INFORMATION TABLE


Device code	VS-	85	HF	R	160	M
	(1)	(2)	(3)	(4)	(5)	(6)
<b>[1]</b>		- Vishay Semiconductors product				
<b>[2]</b>		- 85 = Standard device 86 = Not isolated lead 87 = Isolated lead with silicone sleeve (red = Reverse polarity) (blue = Normal polarity) 88 = type for rotating application				
<b>[3]</b>		- HF = Standard diode				
<b>[4]</b>		- None = Stud normal polarity (cathode to stud) R = Stud reverse polarity (anode to stud)				
<b>[5]</b>		- Voltage code x 10 = $V_{RRM}$ (see Voltage Ratings table)				
<b>[6]</b>		- None = Stud base DO-203AB (DO-5) 1/4" 28UNF-2A M = Stud base DO-203AB (DO-5) M6 x 1 (not available for 88HF) M8 = Stud base DO-203AB (DO-5) M8 x 1.25				

### LINKS TO RELATED DOCUMENTS

Dimensions	<a href="http://www.vishay.com/doc?95342">www.vishay.com/doc?95342</a>
------------	------------------------------------------------------------------------

## DO-203AB (DO-5) for 85HF(R) Series

**DIMENSIONS** in millimeters (inches)

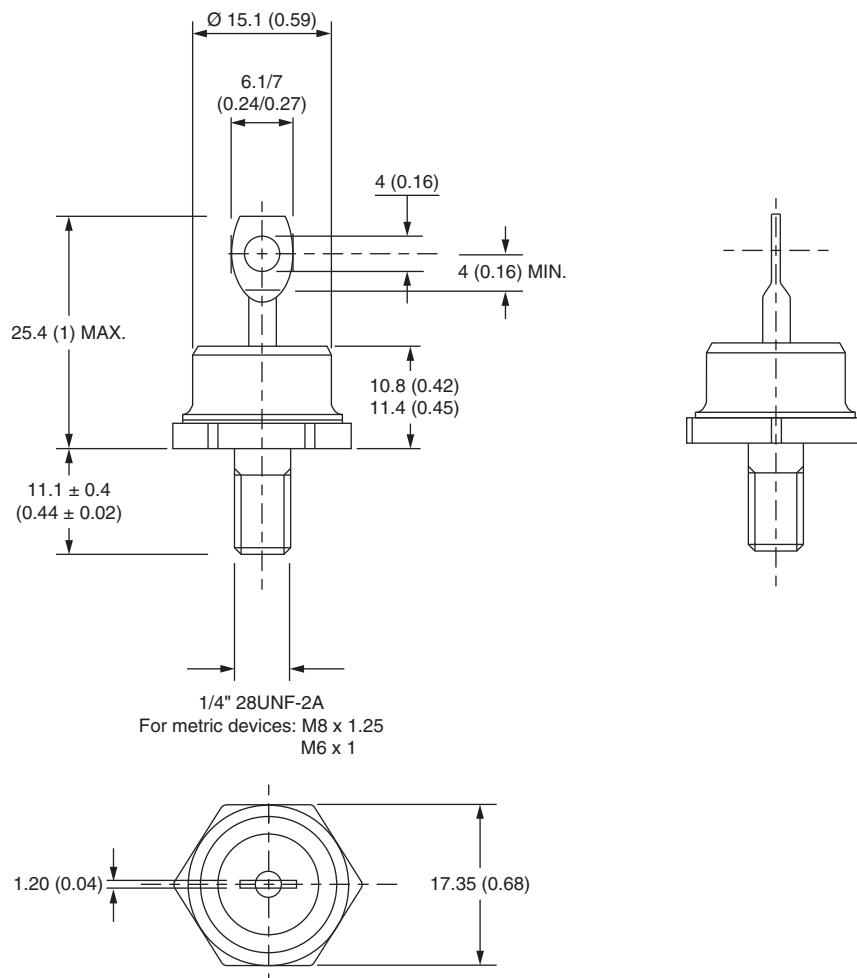

## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.