

10W to 150W Single Output, 115VAC Input

Features

- ◆ Input transient protected
- ◆ 2 year warranty
- ◆ High quality design
- ◆ 200% Peak Power Version (VSP)
- ◆ Broad product range



Key Market Segments & Applications



Industrial



RoHS


Specifications											
Model		VS10C	VS15C	VS30C	VS50B VS50P	VS75B VS75P	VS100B VS100P	VS150B VS150P			
AC Input Voltage range	-	85-132VAC (47-440Hz)									
DC Input Voltage range	VDC	110 - 175VDC									
Inrush Current (100VAC) (1)	A	25	30	25	30	30	20	20			
Temperature Coefficient	-	<0.02%/°C									
Overcurrent Protection (2)	-	~105%			VSB:~125%; VSP: >102% of Peak						
Overvoltage Protection	V	~115% Diode Clamp			~115 - 135% Manual Reset						
Hold Up Time (Typ) at 100VAC	ms	20			17						
Remote Sense	-	None									
Operating Temperature (3)	-	-10°C to +60°C, derate linearly to 70% load from 50°C to 60°C									
Storage Temperature	-	-30 to +85°C									
Humidity (non condensing)	-	Storage 10-95% RH, Operating 30-90% RH									
Cooling (4)	-	Convection							Forced		
Withstand Voltage	-	Input to Ground 2kVAC (20mA), Input to Output 2kVAC (20mA), Output to Ground 500VAC (100mA) for 1 min.									
Isolation Resistance	-	>100M at 25°C & 70%RH, Output to Ground 500VDC									
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 19.6m/s ² constant X, Y, Z 1 hour									
Shock	-	< 196.1 m/s ²									
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1									
Conducted & Radiated EMI	-	FCC Class B, VCCI-B									
Recommended EMI Filter	-	RSEL-20R5W	RSEL-2001W	RSEL-2002W	RSEL-2003W	RSEL-2006W					
Weight (Typ) (VSP)	g	65	80	150	200	350 (280)	420 (350)	550 (480)			
Size (WxHxD)	mm	See Outline Drawings									
Warranty	yrs	Two Years									

Notes:

- (1) 25°C ambient (cold start)
- (2) Avoid prolonged operation in overload
- (3) VS50B24 -10°C to +60°C, derate linearly to 62% load from 40°C to 60°C, VS50P derate to 60% at 60°C
- (4) 0.7m/s forced air required, consult installation manual for derating with convection cooling

Model Selector								
Model	Voltage V	Adjust Range V	Max Curr. A	Peak Curr. A	Load Reg mV	Line Reg mV	Ripple Noise mV	Eff. %
VS10C-3	3.3	2.97-3.63	2	-	40	20	120	62
VS15C-3	3.3	2.97-3.63	3	-	40	20	120	62
VS30C-3	3.3	2.97-3.63	6	-	40	20	120	69
VS50B-3	3.3	2.97-3.63	10	12	40	20	120	73
VS75B-3	3.3	2.97-3.63	15	18	40	20	120	72
VS100B-3	3.3	2.97-3.63	20	24	40	20	120	72
VS150B-3	3.3	2.97-3.63	30	36	40	20	120	72
VS10C-5	5	4.5-5.5	2	-	40	20	120	71
VS15C-5	5	4.5-5.5	3	-	40	20	120	72
VS30C-5	5	4.5-5.5	6	-	40	20	120	75
VS50B-5	5	4.5-5.5	10	12	40	20	120	78
VS75B-5	5	4.5-5.5	15	18	40	20	120	79
VS100B-5	5	4.5-5.5	20	24	40	20	120	79
VS150B-5	5	4.5-5.5	30	36	40	20	120	78
VS10C-12	12	10.8-13.2	0.9	-	96	48	150	75
VS15C-12	12	10.8-13.2	1.3	-	96	48	150	75
VS30C-12	12	10.8-13.2	2.5	-	96	48	150	80
VS50B-12	12	10.8-13.2	4.3	5.16	96	48	150	79
VS75B-12	12	10.8-13.2	6.3	7.56	96	48	150	80
VS100B-12	12	10.8-13.2	8.5	10.2	96	48	150	80
VS150B-12	12	10.8-13.2	12.5	15	96	48	150	80
VS10C-15	15	13.5-16.5	0.7	-	120	60	150	75
VS15C-15	15	13.5-16.5	1	-	120	60	150	75
VS30C-15	15	13.5-16.5	2	-	120	60	150	81
VS50B-15	15	13.5-16.5	3.5	4.2	120	60	150	80
VS75B-15	15	13.5-16.5	5	6.0	120	60	150	80
VS100B-15	15	13.5-16.5	7	8.4	120	60	150	80
VS150B-15	15	13.5-16.5	10	12	120	60	150	80
VS10C-24	24	21.6-26.4	0.5	-	240	96	200	78
VS15C-24	24	21.6-26.4	0.7	-	240	96	200	78
VS30C-24	24	21.6-26.4	1.3	-	150	96	200	82
VS50B-24	24	21.6-26.4	2.5	3.0	150	96	200	80
VS50P-24	24	21.6-26.4	2.5	4.2	150	96	180	83
VS75B-24	24	21.6-26.4	3.2	3.84	150	96	200	81
VS75P-24	24	21.6-26.4	3.2	7.0	150	96	180	83
VS100B-24	24	21.6-26.4	4.3	5.16	150	96	200	81
VS100P-24	24	21.6-26.4	4.3	10	150	96	180	85
VS150B-24	24	21.6-26.4	6.3	7.56	150	96	200	80
VS150P-24	24	21.6-26.4	6.3	12	150	96	180	86
VS30C-36	36	32.4-39.6	0.9	-	240	144	300	80
VS75B-36	36	32.4-39.6	2.1	2.52	240	144	300	81
VS100B-36	36	32.4-39.6	3	3.6	240	144	300	81
VS150B-36	36	32.4-39.6	4.2	5.04	240	144	300	80
VS30C-48	48	43.2-52.8	0.7	-	480	192	400	80
VS75B-48	48	43.2-52.8	1.6	1.92	300	192	400	81
VS100B-48	48	43.2-52.8	2.2	2.64	200	192	400	81
VS150B-48	48	43.2-52.8	3.2	3.84	300	192	400	81

Peak Current Note: For 10s maximum, 35% duty cycle, average power not to exceed maximum ratings. See installation manual.

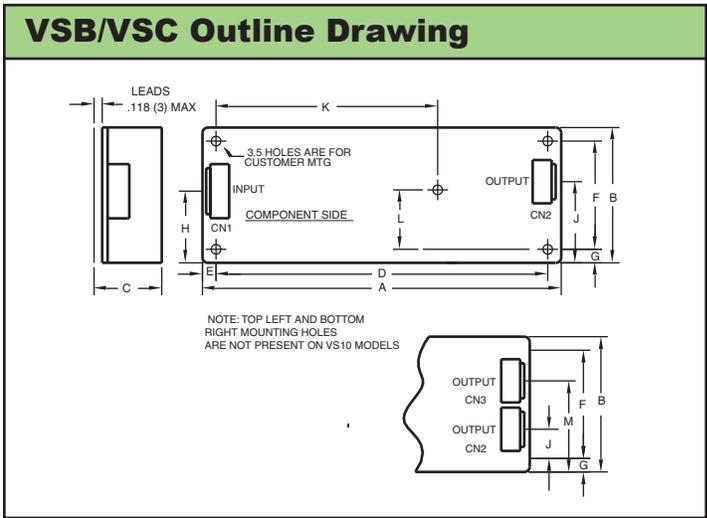

MODEL	DIMENSIONS:													WEIGHT:
	A	B	C	D	E	F	G	H	J	K	L	M		
VS10	3.70 (94)	1.93 (49)	.67 (17)	3.425 (87)	.138 (3.5)	1.654 (42)	.138 (3.5)	1.02 (26)	.85 (21.5)	-	-	-	-	.17 LBS
VS15	4.53 (115)	1.97 (50)	.67 (17)	4.252 (108)	.138 (3.5)	1.693 (43)	.138 (3.5)	1.22 (31)	1.39 (35.25)	-	-	-	-	.22 LBS
VS30	5.22 (132.5)	1.97 (50)	.98 (25)	4.823 (122.5)	.197 (5)	1.576 (40)	.197 (5)	1.02 (26)	1.18 (30)	-	-	-	-	.29 LBS
VS50	7.68 (195)	1.97 (50)	.98 (25)	7.283 (185)	.197 (5)	1.576 (40)	.197 (5)	1.10 (28)	.67 (17)	-	-	-	-	.44 LBS
VS75	8.74 (222.0)	1.97 (50)	1.26 (32)	8.346 (212)	.197 (5)	1.576 (40)	.197 (5)	.85 (21.5)	1.06 (27)	5.335 (135.5)	1.280 (32.5)	-	-	.77 LBS
VS100	8.74 (222.0)	2.44 (62)	1.26 (32)	8.346 (212)	.197 (5)	2.047 (52)	.197 (5)	.98 (25)	1.22 (31)	4.705 (119.5)	1.673 (42.5)	-	-	.92 LBS
VS150	8.74 (222.0)	2.95 (75)	1.42 (36)	8.346 (212)	.197 (5)	2.560 (65)	.197 (5)	1.61 (46)	.85 (21.7)	4.961 (126)	2.165 (55)	1.91 (48.5)	-	1.21 LBS

NOTE:
1. DIMENSIONS ARE IN INCHES EXCEPT DIMENSIONS () ARE IN MM.

Other Industrial Products

HWS	15W to 1500W Single output
ZWS, ZWD, ZWQ	5W to 240W Universal input
SC, SCS120	30W to 120W Single, dual & triple output
ZP	40W to 60W Single & multiple output

For Additional Information, please visit
us.tdk-lambda.com/lp/products/vsb-series.htm



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK-Lambda:

[VS100B-12](#) [VS100B-15](#) [VS100B-24](#) [VS100B-36](#) [VS100P24](#) [VS10B-12](#) [VS10B-15](#) [VS10B-24](#) [VS10B-5](#) [VS10C-12](#) [VS10C-24](#) [VS10C-3](#) [VS10C-5](#) [VS150B-15](#) [VS150B-3](#) [VS150B-36](#) [VS150B-48](#) [VS150B-5](#) [VS150P24](#) [VS15B-12](#) [VS15B-15](#) [VS15B-24](#) [VS15B-5](#) [VS15C-12](#) [VS15C-15](#) [VS15C-3](#) [VS15C-5](#) [VS30B-15](#) [VS30B-24](#) [VS30B-5](#) [VS30C-15](#) [VS30C-24](#) [VS30C-3](#) [VS30C-48](#) [VS30C-5](#) [VS50B-12](#) [VS50B-15](#) [VS50B-24](#) [VS50B-3](#) [VS50P24](#) [VS75B-12](#) [VS75B-24](#) [VS75B-3](#) [VS75B-36](#) [VS75B-48](#) [VS75B-5](#) [VS75P24](#) [VS75B-15](#) [VS30C-12](#) [VS100B-5](#) [VS150B-12](#) [VS100B-3](#) [VS15C-24](#) [VS30C-36](#) [VS100B-48](#) [VS30B-12](#) [VS50B-5](#) [VS150B-24](#) [VS10C-15](#)