
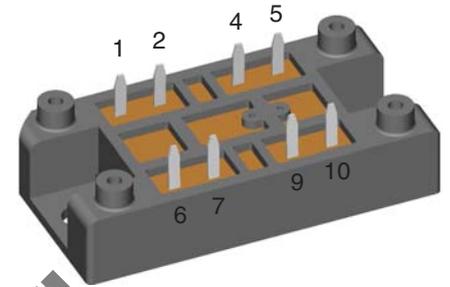


AC Controller Modules

$I_{RMS} = 2x\ 45\ A$
 $V_{RRM} = 1200-1600\ V$

V_{RSM}	V_{RRM}	Type
V_{DSM}	V_{DRM}	
V	V	
1200	1200	VW2x45-12io1
1400	1400	VW2x45-14io1
1600	1600	VW2x45-16io1



Symbol	Conditions	Maximum Ratings	Features	
I_{RMS}	$T_C = 85^\circ C$; (per phase)	45 A	<ul style="list-style-type: none"> • Thyristor controller for AC (circuit W2C acc. to IEC) for mains frequency • Soldering connections for PCB mounting • Isolation voltage 3600 V~ • Planar passivated chips • UL applied 	
I_{TRMS}	$T_{VJ} = T_{VJM}$	32 A		
I_{TAVM}	$T_C = 85^\circ C$; (180° sine ; per thyristor)	20 A		
I_{TSM}	$T_{VJ} = 45^\circ C$ $V_R = 0$	t = 10 ms (50 Hz), sine		300 A
		t = 8.3 ms (60 Hz), sine		320 A
I^2t	$T_{VJ} = T_{VJM}$ $V_R = 0$	t = 10 ms (50 Hz), sine		270 A
		t = 8.3 ms (60 Hz), sine		290 A
$(di/dt)_{cr}$	$T_{VJ} = 45^\circ C$ $V_R = 0$	t = 10 ms (50 Hz), sine		450 A ² s
		t = 8.3 ms (60 Hz), sine		430 A ² s
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $V_R = 0$	t = 10 ms (50 Hz), sine		360 A ² s
		t = 8.3 ms (60 Hz), sine	350 A ² s	
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ f = 50 Hz, $t_p = 200\ \mu s$ $V_D = \frac{2}{3} V_{DRM}$ $I_G = 0.45\ A$ $di_G/dt = 0.45\ A/\mu s$	repetitive, $I_T = 45\ A$	100 A/ μs	
		non repetitive, $I_T = I_{TAVM}$	500 A/ μs	
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$V_{DR} = \frac{2}{3} V_{DRM}$	1000 V/ μs	
P_{GM}	$T_{VJ} = T_{VJM}$ $I_T = I_{TAVM}$	$t_p = 30\ \mu s$	10 W	
		$t_p = 300\ \mu s$	5 W	
P_{GAVM}			0.5 W	
V_{RGM}			10 V	
T_{VJ}			-40...+125 °C	
T_{VJM}			125 °C	
T_{stg}			-40...+125 °C	
V_{ISOL}	50/60 Hz, RMS $I_{ISOL} \leq 1\ mA$	t = 1 min	3000 V~	
		t = 1 s	3600 V~	
M_d	Mounting torque (M5)		2-2.5/18-22 Nm/lb.in.	
Weight	typ.		35 g	

Features

- Thyristor controller for AC (circuit W2C acc. to IEC) for mains frequency
- Soldering connections for PCB mounting
- Isolation voltage 3600 V~
- Planar passivated chips
- UL applied

Applications

- Switching and control of three phase AC circuits
- Softstart AC motor controller
- Solid state switches
- Light and temperature control

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling

Recommended replacement:
VW2x60-12/14/16 io1

Data according to IEC 60747 refer to a single thyristor/diode unless otherwise stated.

Symbol	Conditions	Characteristic Values
I_D, I_R	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	≤ 5 mA
V_T	$I_T = 45$ A; $T_{VJ} = 25^\circ\text{C}$	≤ 1.52 V
V_{T0}	For power-loss calculations only	0.85 V
r_T		15 m Ω
V_{GT}	$V_D = 6$ V $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤ 1.5 V ≤ 1.6 V
I_{GT}	$V_D = 6$ V $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤ 100 mA ≤ 200 mA
V_{GD}	$T_{VJ} = T_{VJM}$	≤ 0.2 V
I_{GD}	$V_D = \frac{2}{3} V_{DRM}$	≤ 5 mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 10$ μs $I_G = 0.45$ A; $di_G/dt = 0.45$ A/ μs	≤ 450 mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6$ V; $R_{GK} = \infty$	≤ 200 mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = \frac{1}{2} V_{DRM}$ $I_G = 0.45$ A; $di_G/dt = 0.45$ A/ μs	≤ 2 μs
t_q	$T_{VJ} = T_{VJM}; I_T = 20$ A, $t_p = 200$ μs ; $di/dt = -10$ A/ μs $V_R = 100$ V; $dv/dt = 15$ V/ μs ; $V_D = \frac{2}{3} V_{DRM}$	typ. 150 μs
R_{thJC}	per thyristor; DC	1.25 K/W
	per module	0.31 K/W
R_{thJK}	per thyristor; DC	1.55 K/W
	per module	0.39 K/W
d_s	Creeping distance on surface	12.7 mm
d_A	Creepage distance in air	9.4 mm
a	Max. allowable acceleration	50 m/s ²

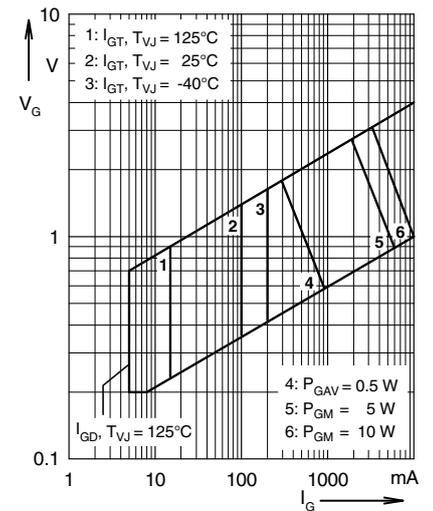


Fig. 1 Gate trigger characteristics

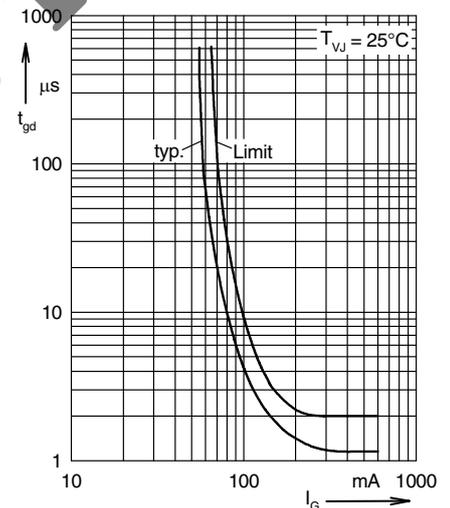


Fig. 2 Gate trigger delay time

Dimensions in mm (1 mm = 0.0394")

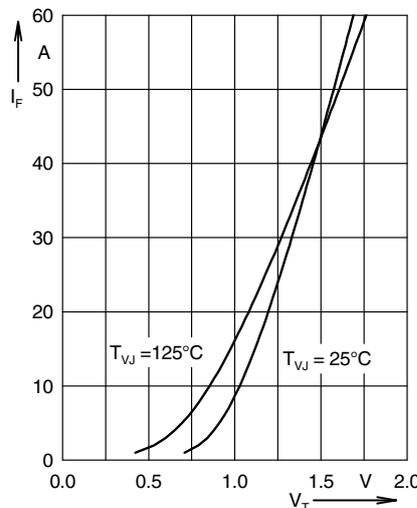
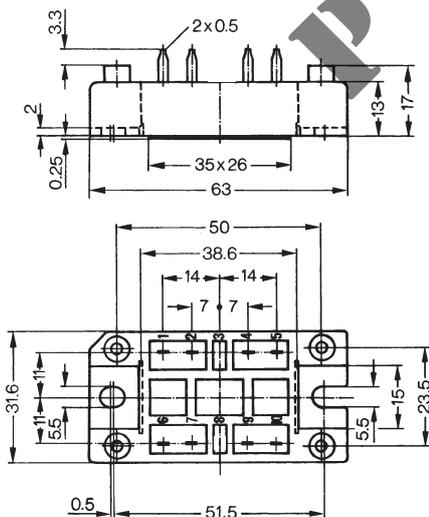


Fig. 3 Forward current vs. voltage drop per leg

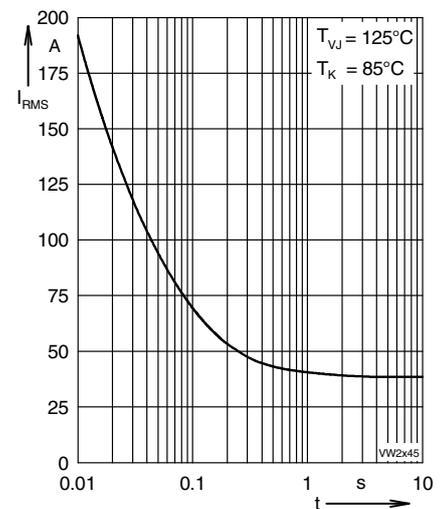


Fig. 4 Rated RMS current vs. time (360° conduction)

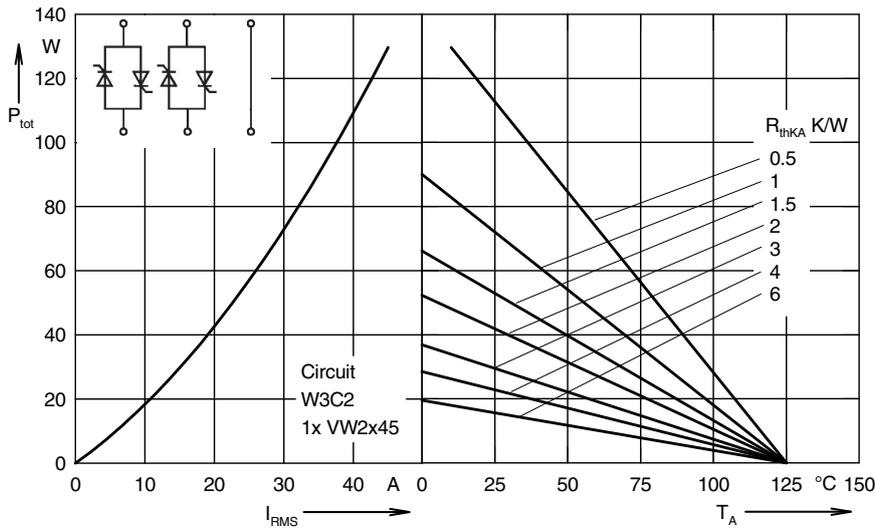


Fig. 5 Load current capability for two phase AC controller

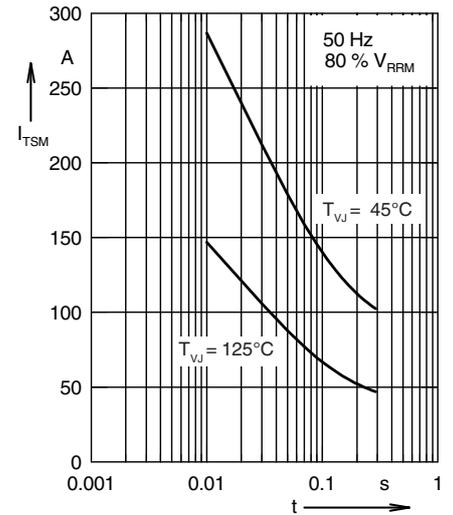


Fig. 6 Surge overload current

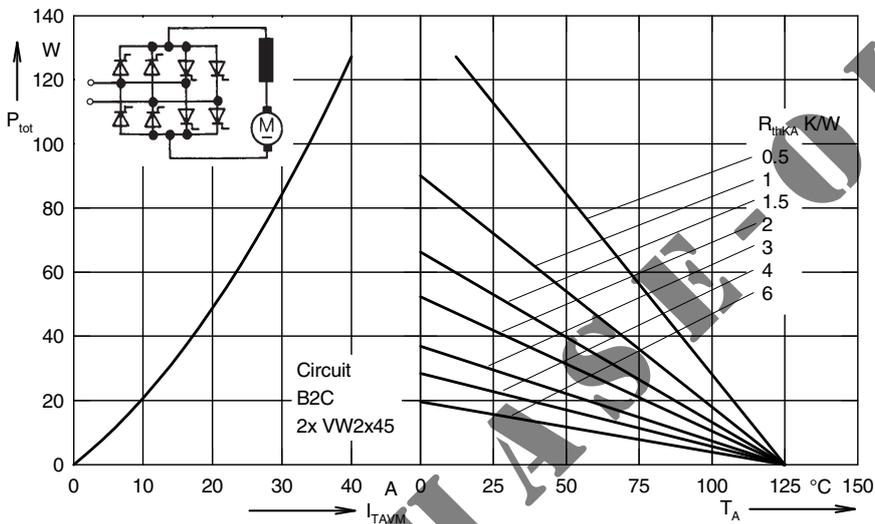


Fig. 7 Power dissipation vs. direct output current and ambient temperature
cyclo converter, four quadrant operation

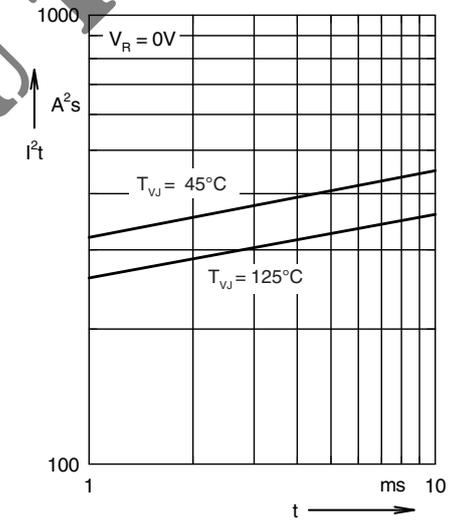


Fig. 8 I^2t vs. time (per thyristor)

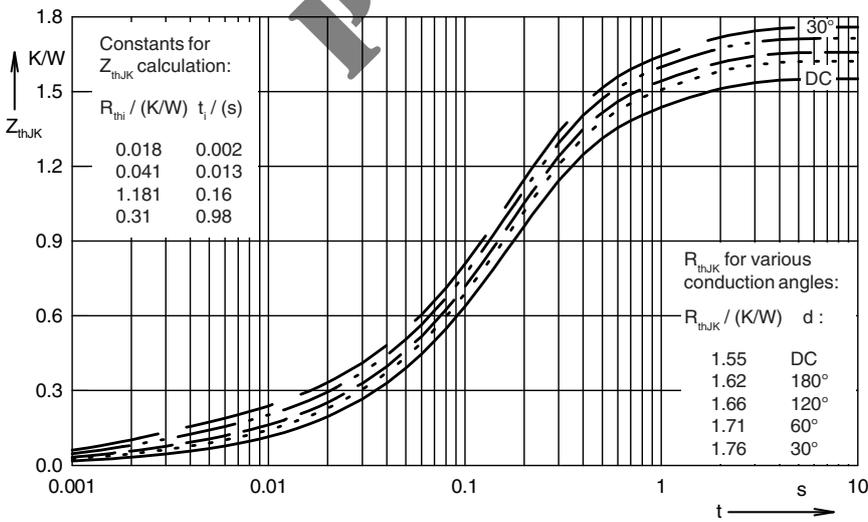


Fig. 9 Transient thermal impedance junction to heatsink (per thyristor)

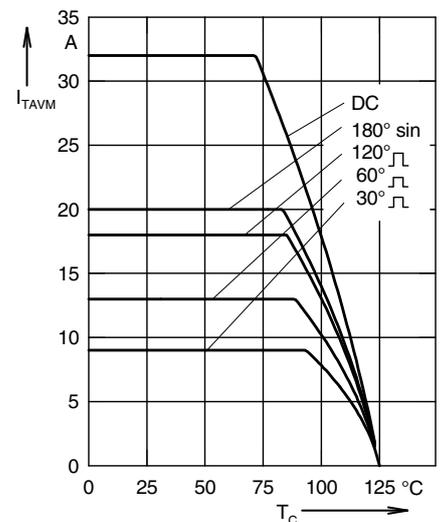


Fig. 10 Maximum forward current at case temperature

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[VW2x45-08io1](#)