

W005M THRU W10M

SINGLE PHASE SILICON BRIDGE RECTIFIER

VOLTAGE: 50 TO 1000V

CURRENT: 1.5A




FEATURE

Ideal for printed circuit board
Surge overload rating: 50 A peak
High case dielectric strength

MECHANICAL DATA

Terminal: Plated leads solderable per
MIL-STD 202E, method 208C
Case: UL-94 Class V-0 recognized Flame
Retardant Epoxy
Polarity: Polarity symbol marked on body
Mounting position: any

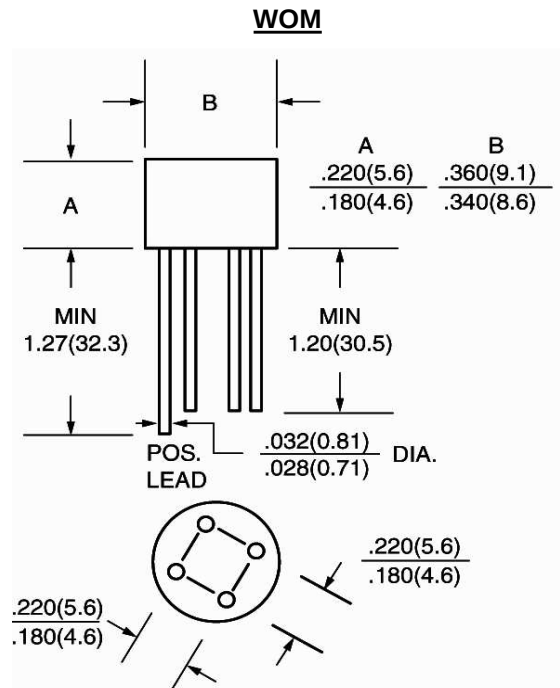

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated,
for capacitive load, derate current by 20%)

	SYMBOL	W005 M	W01 M	W02 M	W04 M	W06 M	W08 M	W10 M	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	Vrms	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	Vdc	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at Ta =25°C	If(av)	1.5							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	50.0							A
Maximum Instantaneous Forward Voltage at forward current 1.5A DC	Vf	1.0							V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =100°C	Ir	10.0 1.0							μA mA
Operating Temperature Range	Tj	-55 to +125							°C
Storage and Operation Junction Temperature	Tstg	-55 to +150							°C

RATINGS AND CHARACTERISTIC CURVES W005M THRU W10M

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

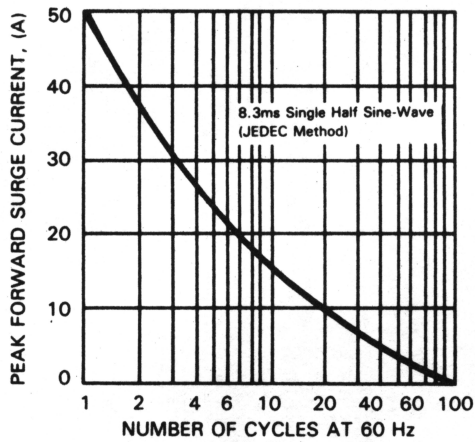


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

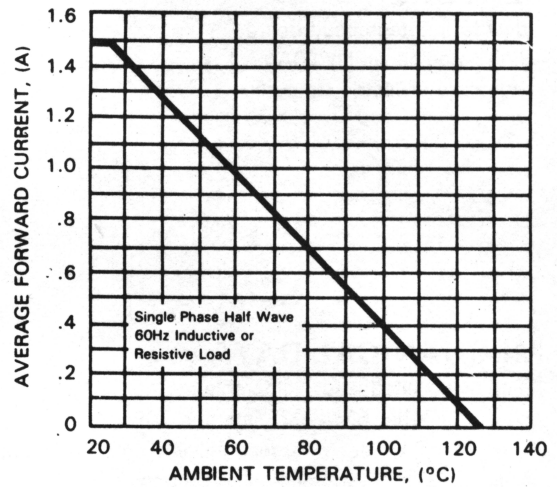


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

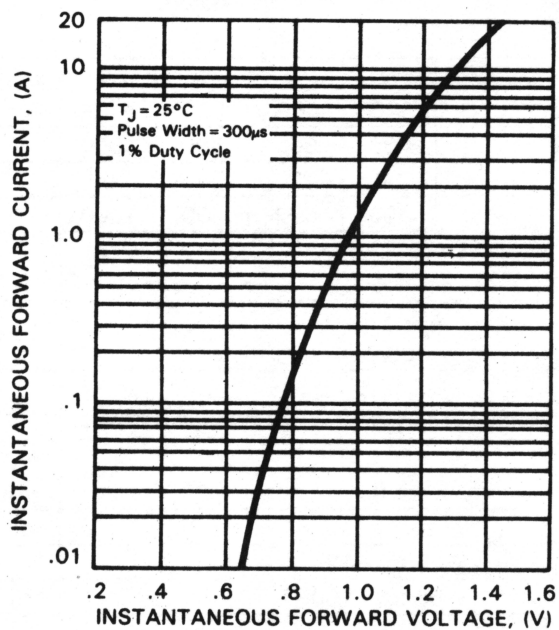


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

