

Customer Information Sheet

DRAWING No.: W2222-00

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

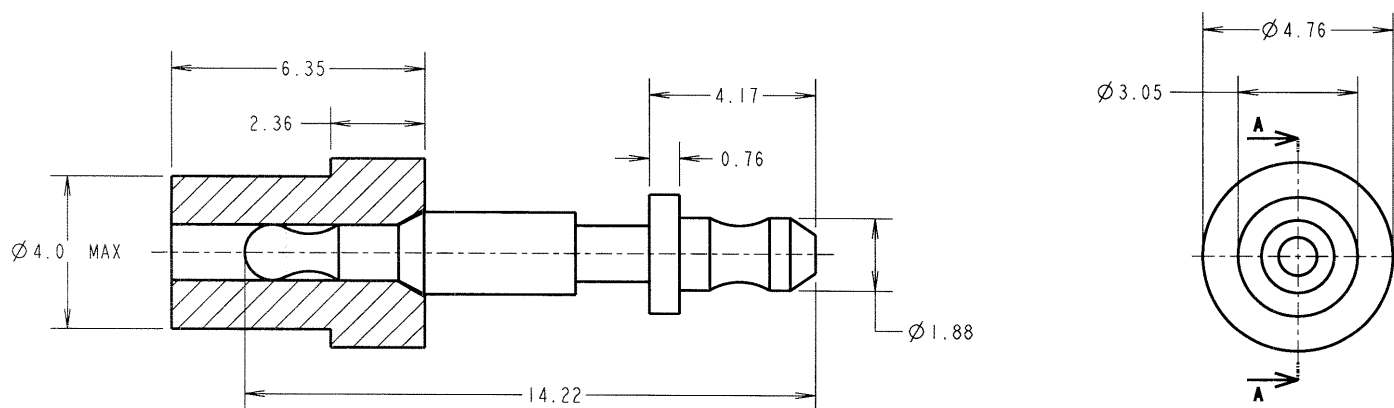

SPECIFICATIONS:

MATERIAL:

INSULATOR = PTFE, WHITE

TERMINAL = BRASS

FINISH:

TERMINAL = 3.5μ SILVER

ELECTRICAL:

CURRENT RATING = 5A MAX

VOLTAGE PROOF = 5KV

ENVIRONMENTAL:

MAX. TEMPERATURE RATING = 200°C

SECTION A-A

NOTES:

1. FOR ASSEMBLY INSTRUCTIONS, SEE INSTRUCTION SHEET IS-24.
2. USE ASSEMBLY TOOL Z1001-00.
3. RECOMMENDED PCB HOLE SIZE = $\varnothing 3.96\text{mm}$.
4. RECOMMENDED PCB THICKNESS = 0.72-1.6mm.

FINISHED PRODUCT

JAE	4	22.10.04	8184
NAME	ISS.	DATE	C/NOTE
APPROVED:			
CHECKED:			
DRAWN:			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = $\pm 1\text{mm}$
X.X = $\pm 0.25\text{mm}$
X.XX = $\pm 0.10\text{mm}$
X.XXX = $\pm 0.01\text{mm}$
ANGLES = $\pm 5^\circ$
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

FEED THROUGH INSULATOR
(PARTIALLY ASSEMBLED)

DRAWING NUMBER:

W2222-00

SHT
2 OF 2

HARWIN INC
U.S.A.

TEL: (812) 542 2546
FAX: (812) 542 2541

HARWIN PLC
U.K.

TEL: 023 9231 4545
FAX: 023 9231 4590

HARWIN PTE
SINGAPORE

TEL: 65 6779 4909
FAX: 65 6779 3868