


PART NO.	"L" LENGTH APPROX.	MAX. COMBINED BUNDLE DIA. APPROX.	"W" WIDTH REF.	"T" THICKNESS REF.	"A"	"B"	MIN. LOOP TENSILE	NYLON 6/6 UV STABILIZED (RMS-46), BLACK
WIT-50RLDH	8-7/8 (225.4)	1.0 (25.4)	.19 (4.8)	.05 (1.3)	.21 (5.3)	.31 (7.9)	50 LBS.	STANDARD
WIT-50LDH	15-5/8 (396.9)	2-1/4 (57.2)						STANDARD
WIT-50LDHR*								SPECIAL

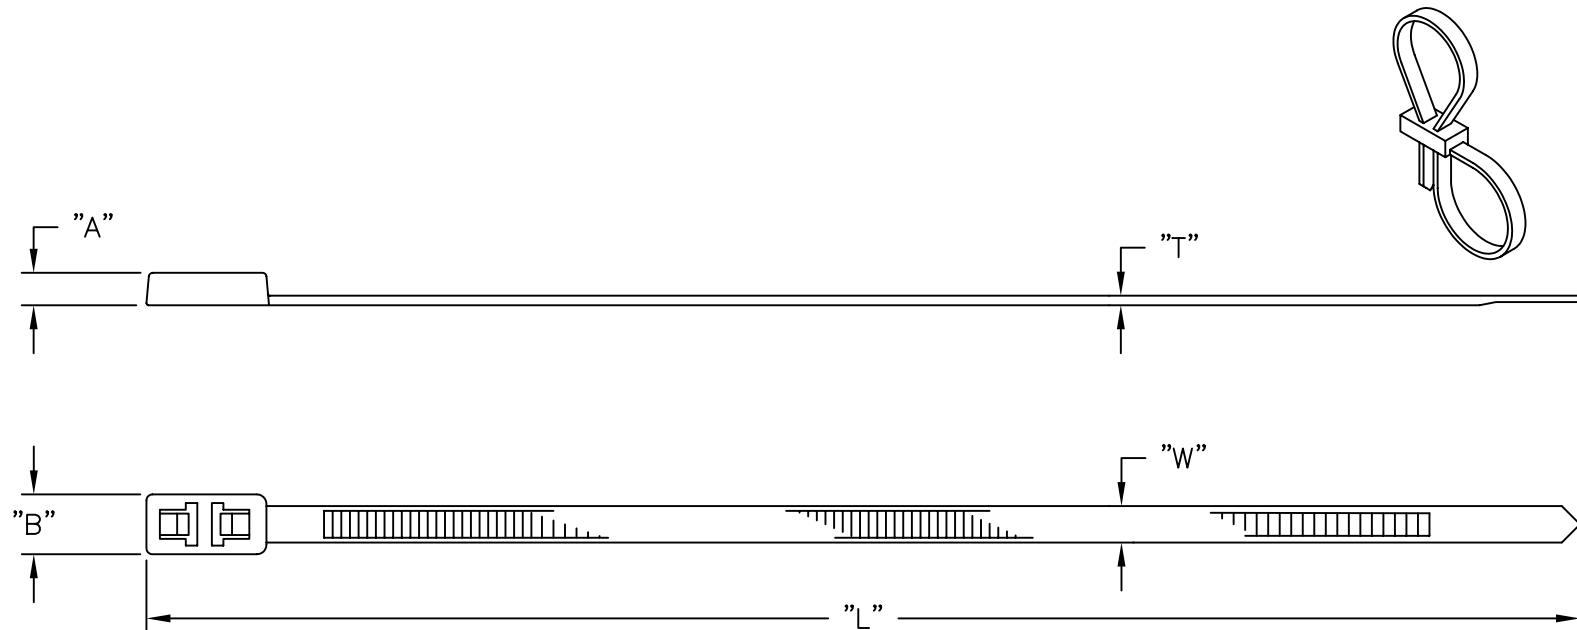

NOTES:

1. MAT'L: NYLON 6/6 (RMS-01), NATURAL.

UV STABILIZED NYLON 6/6 (RMS-46).
TO ORDER USE P/N: WIT-50XXX-UVB

2. *2ND LOOP RELEASABLE

2. *2ND LOOP RELEASABLE			TITLE: DOUBLE HEADED TIES					DWG IN IN (MM)	
D	SEE ECN #818 FOR CHANGES	SM 10.01.04	TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE # WIT-DH	DWN: P.B.	APP:	FINAL		
C	SEE ECN #661 FOR CHANGES	SM 07.07.03		MAT'L: SEE NOTES	DT: 08-11-95	DT:	PART #		
B	UPDATED PRINT AND CHANGED FILE NO.	SM 03.04.02	RE: RICHCO, INC. RICHCO INC. PO BOX 804238,CHICAGO,60680 (773) 539-4060				SEE TABLE		
A	MAT'L UVB BLACK (RMS-46) ADDED	J.L. 9.3.99					PRINT TYPE		
REV	DESCRIPTION	ENGR DATE					CA		

TOLERANCES
UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°