


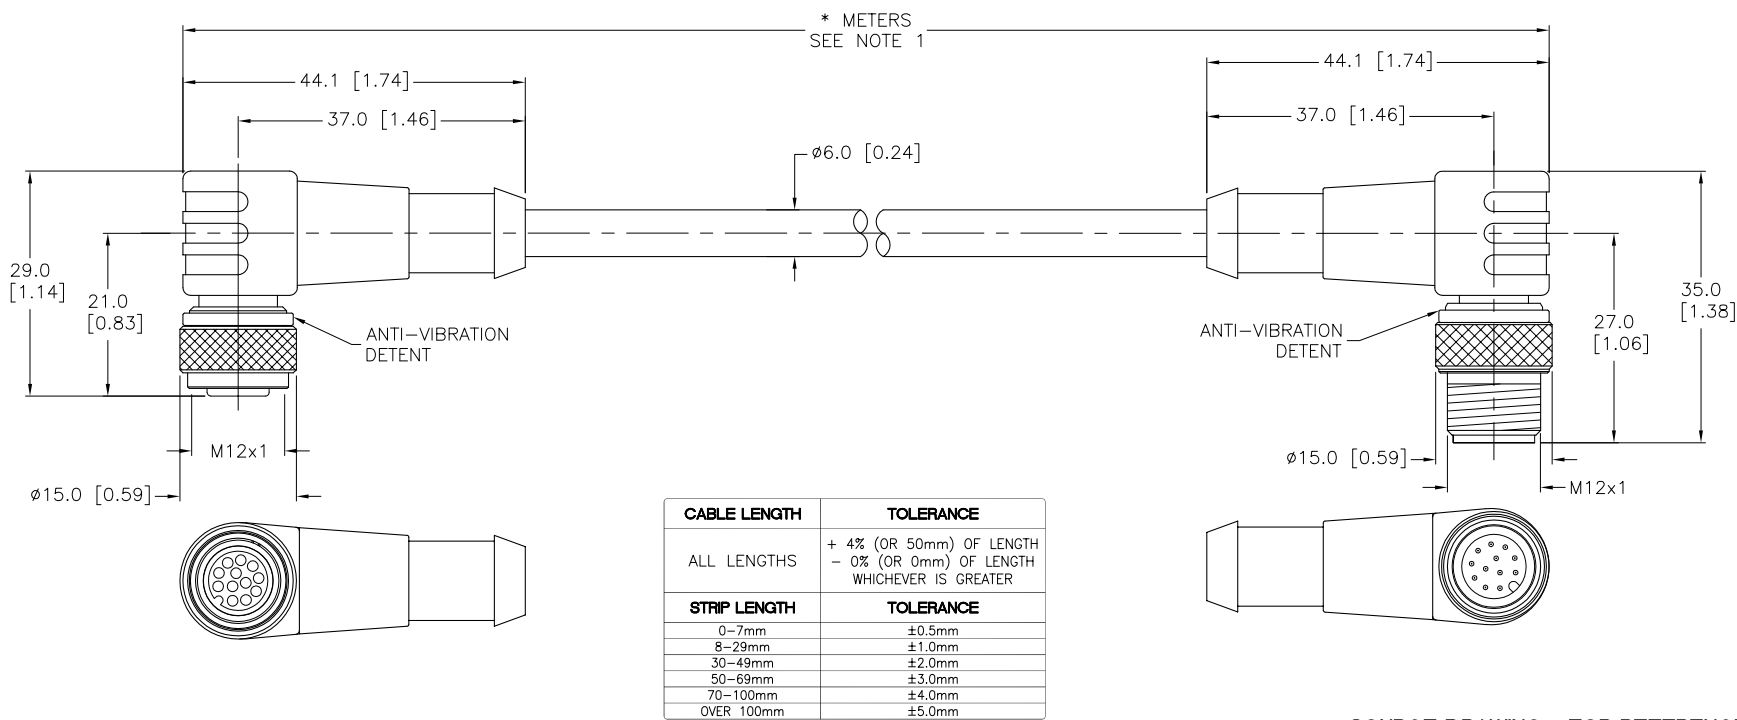


FFEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 9 = ORANGE 10 = TAN 11 = BLACK 12 = VIOLET		 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 9 = ORANGE 10 = TAN 11 = BLACK 12 = VIOLET		CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	60 VAC/75 VDC
				OUTER CABLE JACKET MATERIAL/COLOR	TPU/GRAY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	12x24 AWG
				TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68



SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S90" DESIGNATES POLYURETHANE (TPU) CABLE.

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RWC		DATE 10/12/07	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE 1=1.0	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH				SEE SPECIFICATIONS		MILLIMETER [INCH]		WKC 12T-*--WSC 12T/S90	
						DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
								REV	
								C	
C DRAWING PROCESSED AS PART OF ECO 33971				CBM 04/06/11 33971				FILE: 777007902	
REV DESCRIPTION				BY DATE ECO NO.				SHEET 1 OF 1	