

WP06R

5-6 Watt High Density, Wide Input Range DC/DC Converter



- 2:1 Input Voltage Range
- Operating Temperature Range: -40°C to +100°C
- Industrial Standard 24 Pin DIL
- Metal Case
- Low Profile 0.4 Inch
- Short Circuit Protection
- Temperature Shutdown
- Overvoltage Protection

The WP06R SERIES is a family of high performance DC/DC converters that offers regulated output power over three input voltage ranges of 9-18V, 18-36V, and 34-75V and over a wide operating temperature range of -40°C to +100°C without derating.

The 200kHz switching frequency and flyback converter topology provide

optimum performance in a space-saving package. The design utilizes all surface mounted components, including magnetics, to provide enhanced reliability. All models will operate under no-load conditions, although a minimum load is specified for load regulation measurement purposes.

The converter is packaged in a metal

case for improved EMI shielding and immunity, and for superior thermal performance.

Applications include: Telecommunications, Battery Powered Systems, Portable Instruments, Process Control Equipment, Transportation Equipment and Distributed Power Systems.

PRODUCT SELECTION CHART

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage, rated output current unless otherwise specified.

MODEL*	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)		INPUT CURRENT (mA)		EFFICIENCY (%)
			MIN LOAD	RATED LOAD	MIN LOAD	RATED LOAD	
WP06R12S05	12	5.0	100	1,000	75	540	75
WP06R12S12	12	12.0	42	416	75	520	77
WP06R12S15	12	15.0	33	333	75	520	77
WP06R12D05	12	+/-5.0	+/-50	+/-500	75	540	75
WP06R12D12	12	+/-12.0	+/-21	+/-208	75	520	77
WP06R12D15	12	+/-15.0	+/-17	+/-167	75	520	77
WP06R24S05	24	5.0	100	1,000	35	265	79
WP06R24S12	24	12.0	50	500	40	305	80
WP06R24S15	24	15.0	40	400	40	305	80
WP06R24D05	24	+/-5.0	+/-50	+/-500	35	265	79
WP06R24D12	24	+/-12.0	+/-25	+/-250	40	310	80
WP06R24D15	24	+/-15.0	+/-20	+/-200	40	310	80
WP06R48S05	48	5.0	100	1,000	18	130	80
WP06R48S12	48	12.0	50	500	22	150	81
WP06R48S15	48	15.0	40	400	22	150	81
WP06R48D05	48	+/-5.0	+/-50	+/-500	18	133	78
WP06R48D12	48	+/-12.0	+/-25	+/-250	22	151	81
WP06R48D15	48	+/-15.0	+/-20	+/-200	22	151	81

NOTES: Other input to output voltages may be available. Please consult factory.

*A "P" at the end of the part number indicates positive ground option. "N" indicates negative ground option — this designator is mandatory.

SPECIFICATIONS, ALL MODELS

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage, rated output current unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS			
INPUT	Voltage Range	9	12	18	V _{DC}			
		18	24	36	V _{DC}			
		34	48	75	V _{DC}			
Reflected Ripple Current		20		mA _{p-p}				
OUTPUT	Rated Power			5.0	W			
		12V Input Models		5.0	W			
		5V Output Models		6.0	W			
Voltage Setpoint Accuracy				±1.5	%			
Temperature Coefficient		±0.02		%/°C				
Line Regulation - Singles		Low Line to High Line		±0.25	%			
Line Regulation - Duals				±1.0	%			
Load Regulation - Singles		Min. Load to Rated Load		±0.5	%			
Load Regulation - Duals				±2.0	%			
Ripple & Noise		BW = 5Hz to 20MHz		30	mV _{p-p}			
GENERAL								
ISOLATION								
Rated Voltage		1500		V _{DC}				
Test Voltage		1500		VPK				
Resistance		10		GΩ				
Capacitance		200		pF				
Leakage Current		V _{ISO} = 240VAC, 60Hz		15				
Switching Frequency		200		KHz				
MTTF per MIL-HDBK-217, Rev. F		Circuit Stress Method						
Ground Benign		T _A = +25°C		1200				
Package Weight		15		g				
TEMPERATURE								
Specification (Ambient)		-40		+71				
Operation (Case)		Derate linearly from 71°C		+100				
Storage		-55		+125				

REMOTE ON/OFF CONTROL

Logic Compatibility	CMOS or Open Collector TTL
EC On	Open Circuit or > 3VDC
EC Off	< 1VDC
Shutdown Idle Current	1mA
Control Common	-Vin


ORDERING INFORMATION

Device Family	WP06R	XXYZZ	P/N	R
5-6W regulated DC/DC				
Model Number				
xx = Input Voltage y = Number of Outputs (S=single; D=dual) zz = Output Voltage				
Ground Connection (Specify N=Neg. or P=Pos.)				
Remote On/Off (Optional)				

ABSOLUTE MAXIMUM RATINGS

Output Short-Circuit Protection (At $T_A = +25^\circ\text{C}$, nominal input voltage)	Continuous
Internal Power Dissipation	1.5W
Lead Temperature (Soldering, 10s Max)	+300°C
Max Case Temperature	+100°C

MECHANICAL

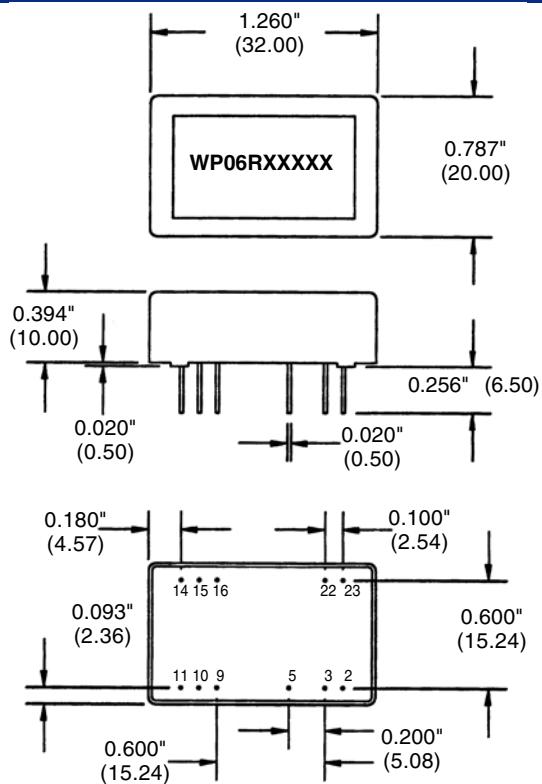


PIN CONNECTIONS		
Number	Pin Function	
	Singles	Duals
2	-Vin	-Vin
3	-Vin	-Vin
5	On/Off (Optional)	On/Off (Optional)
9	No Connection	Com
10	No Connection	No Connection
11	No Connection	-Vout
14		+Vout
15	No Connection	No Connection
16	-Vout	+Vout
22	+Vin	No Connection
23	+Vin	Com
		+Vin
		+Vin


NOTES:

- 1) All dimensions in inches (mm)
- 2) Case is metal and lead material is brass with a solder plated surface to allow ease of solderability.

SIMPLIFIED CIRCUIT SCHEMATIC

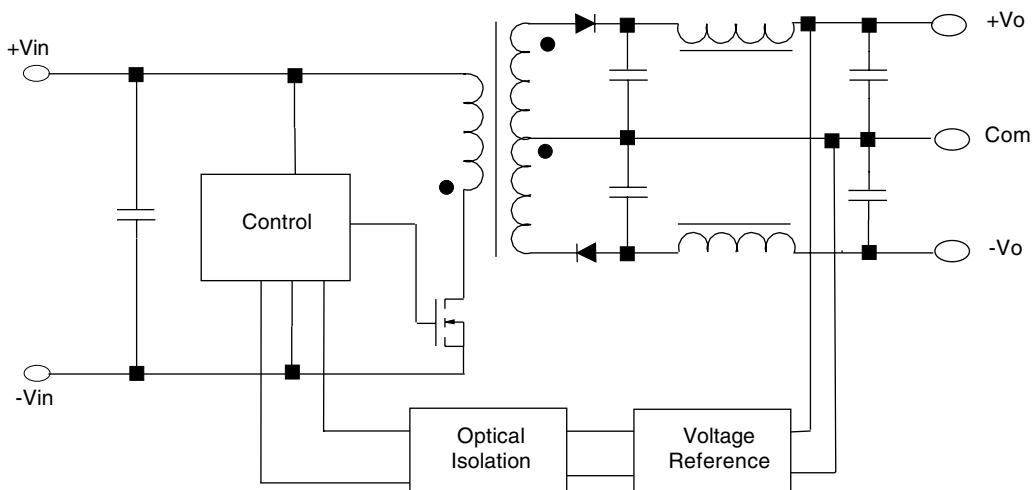

THERMAL DERATING CURVE

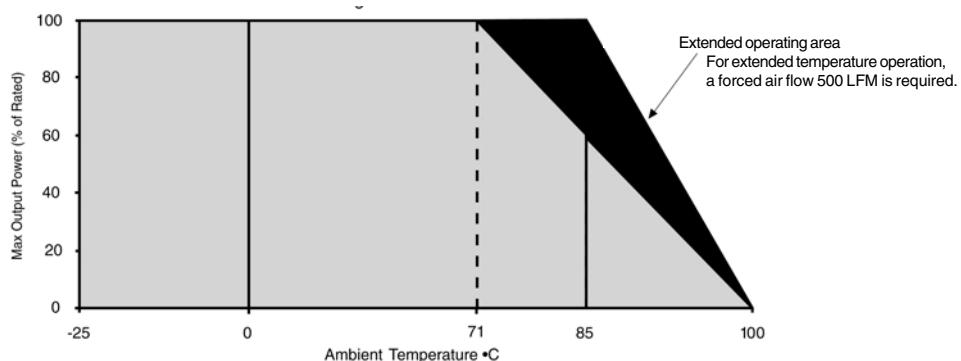

ENGINEERING NOTES

Power Electronics Division, United States
3400 E Britannia Drive, Tucson, Arizona 85706
Tel: 800.547.2537 Fax: 520.770.9369

C&D Technologies, (NCL)
Milton Keynes MK14 5BU UK
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.