



## Ruggedised COTS AC/DC Power Supply

### Ultra-high efficiency 1U size

#### PLUG & PLAY POWER next generation power source

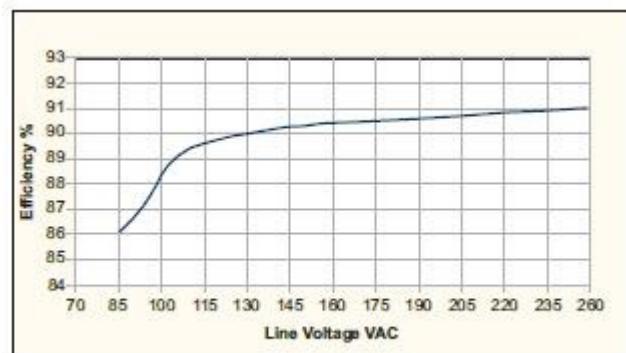
#### FEATURES

- MIL-STD-810G: Shock & Vibration
- MIL-STD-461F: EMC
- Conformal Coated & Ruggedised as standard
- Operating temperature range of -55 to 70°C
- 47-440Hz input frequency
- Anti-Vibration Compound
- 1V to 53V standard output voltages
- All outputs fully floating
- Extra low profile: 1U height (40mm)
- Ultra high efficiency, up to 91%
- Plug & Play Power
  - allows fast custom configuration
  - Outputs completely field configurable with option to factory fix
- Series / Parallel outputs for higher voltages and currents
- Parallel powerpacs for higher power
- OVP, OTP, OCP as standard
- 5V/250mA bias standby voltage provided
- Individual output control
- 3 Year Warranty

#### APPLICATIONS INCLUDE

- Harsh Industrial Electronics
- Radar (Naval, Ground Based)
- Communications
- Test & Measurement

#### EFFICIENCY (typical)



The XF family of power supplies provides up to an incredible 1000W in an extremely compact 1U x 268 x 127mm package. Employing an innovative plug & play architecture the XF family brings unprecedented flexibility that allows users to instantly configure a custom power solution in less than 5 minutes.

Designed for use in harsh operating environments, the XF family is conformal coated and ruggedised to withstand extremes in shock and vibration as well as operation over a wide temperature range of -55 to 70°C. Applications include Harsh Industrial, Test and Measurement, Communications, Fixed and Mobile Radar and Military Electronics which require COTS solutions.

All configurations carry full safety agency approvals, including UL60950 and EN60950 and are fully characterised for EMC according to MIL-STD-461F. All configurations meet the MIL-STD-810G standard for shock and vibration. EMC characterisation, Shock and Vibration and Thermal Stress reports are available.

For further details please contact support@excelsys.com.

#### powerMods

MODEL	Vtrim	Vmin	Vnom	Vmax	I <sub>max</sub>	Watts
Xg1C	1.0	1.5	2.5	3.6	50A	125W
Xg2C	1.5	3.2	5.0	6.0	40A	200W
Xg3C	4.0	6.0	12.0	15.0	20A	240W
Xg4C	8.0	12.0	24.0	28.0	10A	240W
Xg5C	8.0	24.0	48.0	53.0	6A	288W
Xg7C	5.0	5.0	24.0	28.0	5A	120W
Xg8Cv1	5.0	5.0	24.0	28.0	2.5A	60W
	v2	5.0	24.0	28.0	2.5A	60W

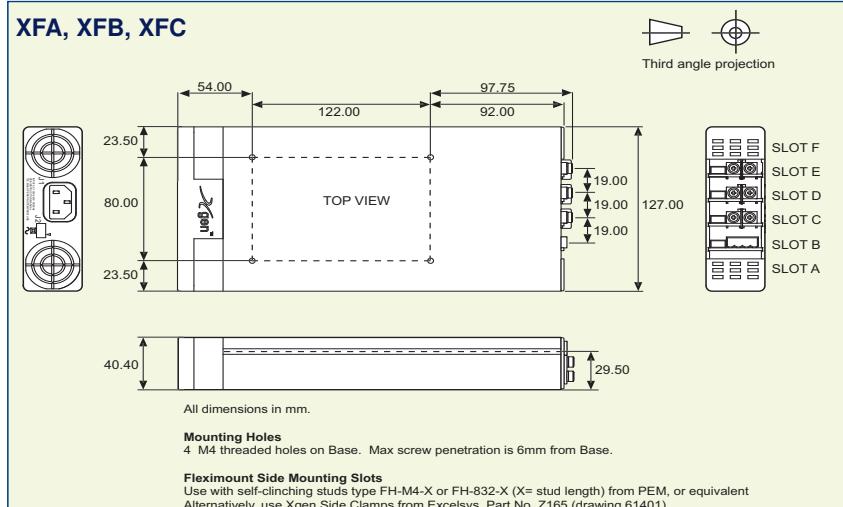
#### powerPacs

Hi-Rel	COTS	XFA	400W
		XFB	700W
		XFC	1000W

Conformal Coated powerMods,  
Xg1C to Xg8C, MUST be used  
with XF powerpacs.

#### MECHANICAL SPECIFICATIONS

##### XFA, XFB, XFC



**SPECIFICATION** applies to configured units consisting of **powerMod** modules plugged into the appropriate **powerPac**

INPUT					
Parameter	Conditions/Description	Min	Nom	Max	Units
<b>Input Voltage Range</b>	Universal Input 47 - 63Hz. Input: 390 - 440Hz.	85 90		264 120	VAC VAC
<b>Power Rating</b>	XFA XFB XFC			400 700 1000	W W W
<b>Input Current</b>	XFA XFB XFC	85VAC in 400W out 85VAC in 700W out 85VAC in 765W out		7.5 9.5 11.5	A A A
<b>Inrush Current</b>	230VAC @ 25°C			25	A
<b>Undervoltage Lockout</b>	Shutdown		65	74	VAC
<b>Fusing</b>	XFA XFB XFC	250V 250V 250V		F8A HRC F10A HRC F12A HRC	
OUTPUT					
Parameter	Conditions/Description	Min	Nom	Max	Units
<b>powerMod Power</b>	As per powerMod table				
<b>Output Adjustment Range</b>	Manual or Electronic As per powerMod Table				
<b>Minimum Load</b>			0		A
<b>Line Regulation</b>	For ±10% change from nominal line			±0.1	%
<b>Load &amp; Cross Regulation</b>	For 25% to 75% load change			±0.2	%
<b>Transient Response</b>	For 25% to 75% load change	Voltage Deviation Settling Time		10 250	% μs
<b>Ripple and Noise</b>	20MHz Bandwidth 100mv or 1.0% pk-pk				
<b>Overvoltage Protection</b>	Two-Level: 1st Level: Vset Tracking. 2nd Level: Vmax (Latching)		110	130	%
<b>Overcurrent Protection</b>	Straight line with hiccup activation at <30% of Vnom		110	120	%
<b>Remote Sense</b>	Max. line drop compensation. (except Xg7, Xg8)			0.5	VDC
<b>Overshoot</b>				2	%
<b>Turn-on Delay</b>	From AC In / Enable signal			600 / 30	ms
<b>Rise Time</b>	Monotonic			5	ms
<b>Hold-up Time</b>	For nominal output voltages at full load.	20			ms
<b>Output Isolation</b>	Output to Output / Output to Chassis	500 / 500			VDC
GENERAL					
Parameter	Conditions/Description	Min	Nom	Max	Units
<b>Isolation Voltage</b>	Primary to Secondary Input to Chassis	3000 1500			VAC VAC
<b>Efficiency</b>	230VAC, 1000W @ 24V		91		%
<b>Safety Agency Approvals</b>	EN60950, UL60950, CSA22.2 No.950 UL File No. E181875				
<b>Earth Leakage Current</b>	230VAC, 50Hz, 25°C		91		%
<b>Bias Supply</b>	Always ON. Current 250mA	4.8	5.0	5.5	VDC
<b>Reliability</b>	Telcordia SR-332 at 25°C and full load Telcordia SR-332 at 25°C and full load MIL-STD-217F at 25°C and full load MIL-STD-217F at 25°C and full load	<i>powerMod</i> <i>powerPac(excludes fans)</i> <i>powerMod</i> <i>powerPac (excludes fans)</i>		1020 1057 86 77	kh kh kh kh
EMC					
Parameter	Standard	Level		Units	
<b>Emissions</b>					
<b>Conducted (note 5)</b>	EN55011, EN55022, FCC: Level B			Compliant	
<b>Radiated (note 5)</b>	EN55011, EN55022, FCC: Level B			Compliant	
<b>Harmonic Distortion</b>	EN61000-3-2 Class A & MIL-STD-1399 SECTION 300A			Compliant	
<b>Flicker and Fluctuation</b>	EN61000-3-3			Compliant	
<b>Immunity</b>					
<b>Electrostatic Discharge</b>	EN61000-4-2: Level 2			Compliant	
<b>Radiated RFI</b>	EN61000-4-4: Level 3 & MIL-STD-461F			Compliant	
<b>Fast Transients - burst</b>	EN61000-4-4: Level 3			Compliant	
<b>Input Line Surges</b>	EN61000-4-5: Level 3 & MIL-STD-1399			Compliant	
<b>Conducted RFI</b>	EN61000-4-6: Level 3 & MIL-STD-461F			Compliant	
<b>Voltage Dips</b>	EN61000-4-11 & MIL-STD-704			Compliant	
ENVIRONMENTAL					
Parameter	Conditions/Description	Min	Nom	Max	Units
<b>Operating Temperature</b>		-55		+70	°C
<b>Storage Temperature</b>		-55		+75	°C
<b>Derating</b>	Contact Excelsys for full temperature deratings				
<b>Acoustic Noise</b>			56.5		dBA
<b>Relative Humidity</b>	Non-condensing	5	95		%RH
<b>Shock</b>	3000 Bumps, 10G (16ms) half sine				
<b>Vibration</b>	1.5G : MIL-STD-810G	10	500		Hz

**NOTES**

- This product is not intended for use as a stand alone unit and must be installed by qualified personnel.
- The specifications contained herein are believed to be correct at time of publication and are subject to change without notice.
- All specifications at nominal input, full load, 25°C unless otherwise stated.
- When powering inductive or capacitive loads, it is recommended to use a blocking diode on the output.
- Conformal Coated **powerMod**s, Xg1C to Xg8C, MUST be used with XF **powerPac**s.
- An external filter is required to meet the conducted and radiated emissions requirements for MIL-STD-461F. For further details contact support@excelsys.com.

**Voltage Adjustment - Local**

The multi-turn potentiometer that adjusts each output within the specified range may be accessed via the output panel of the power supply. Clockwise rotation increases output voltage. Resolution is approximately 5% of nominal voltage ( $V_{nom}$ ) per turn. Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

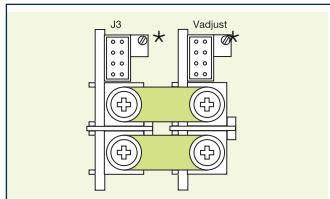
**Voltage Adjustment - Remote (resistive / electronic)**

The output voltage may be adjusted or trimmed by means of an external resistor or potentiometer network connected to the  $V_{trim}$  pin. Linear Electronic programming is also possible and may be implemented according to the formula  $V_{out} = K V_{control}$ .

**Parallel Connection**

To achieve increased current capacity, simply parallel outputs using the standard parallel links. Excelsys 'wireless' sharing ensures that current hogging is not possible. To parallel connect outputs:

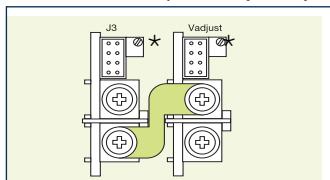
1. Switch on IShare switch to ON on powerMods.
2. Connect Negative parallel link.
3. Adjust output voltages of powerMods to within 5mV of each other.
4. Connect Positive Parallel Link.



\*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

**Series Connection**

To achieve increased output voltages, simply series outputs using standard series links, paying attention to the requirements to maintain SELV levels if required in your system.



\*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

**Remote Sensing**

When the load is remote from the power supply, the remote sense pins may be used to compensate for dynamic impedance effects caused by the power cabling.

**Bias Voltage**

A SELV isolated 5V (always on) bias voltage rated at 250mA is provided on J2 to facilitate miscellaneous system control functions.

**Current Limit Adjustment**

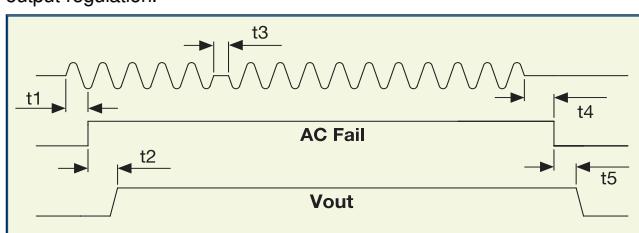
The output current limit setting may be adjusted (downwards only) by means of an external resistor connection to the  $I_{trim}$  pin.

**Inhibit/Enable**

Inhibiting may be implemented either globally or on a per module basis (*powerPac* or *powerMod* inhibiting). Reverse logic (Enabling) may also be implemented.

**AC Fail**

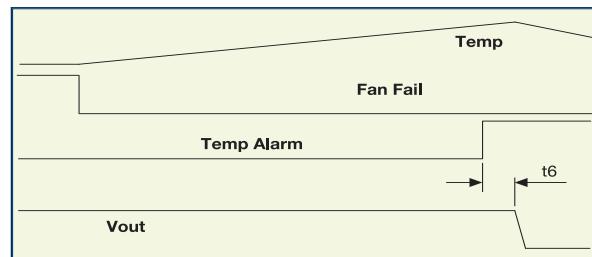
Open collector signal indicating that the input voltage has failed or is less than 80Vac. This signal changes state giving 5ms of warning before loss of output regulation.

**Temperature Alarm (Option 01)**

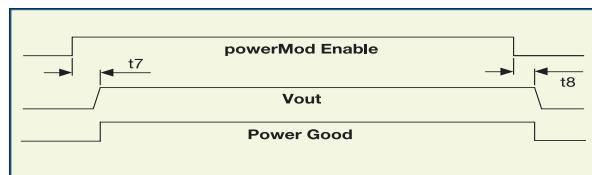
Open collector signal indicating excessive *powerPac* temperatures due to fan failure or operation beyond ratings. This signal is activated at least 10ms prior to system shutdown.

**Fan Fail (Option 01)**

Open collector signal indicating that at least one of the system fans have failed. This does not cause system shutdown.

**Power Good**

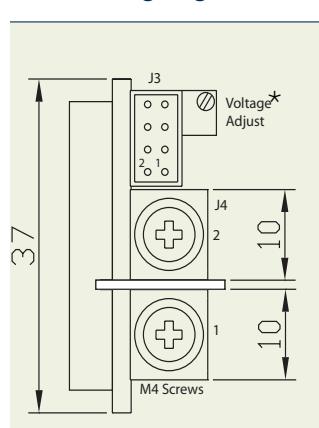
Opto-isolated output signal indicates that the *powerMod* is operating correctly and output voltage is within normal band. Opto transistor ON = Good.

**Indication LED's**

Each powerMod has a visual indicator to identify that it is operating within normal ratings. Very useful for system diagnosis.

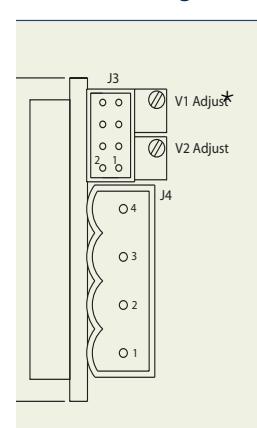
**Signal Connector Pinout**

Pin	J2 ( <i>powerPac</i> )	J3 ( <i>powerMod</i> )	J3 ( <i>powerMod</i> )
		Type A	Type B
1	common	+sense	+pg (V2)
2	+5V bias	-sense	-pg (V2)
3		V trim	inhibit (V2)
4	ac fail	I trim	common (V2)
5	fan fail	+inhibit/enable	+pg (V1)
6	global enable	-inhibit/enable	-pg (V1)
7	temp alarm	+power good	inhibit (V1)
8	global inhibit	-power good	common (V1)

**Signal Connector Pinout****TYPE A Xg1-Xg7**

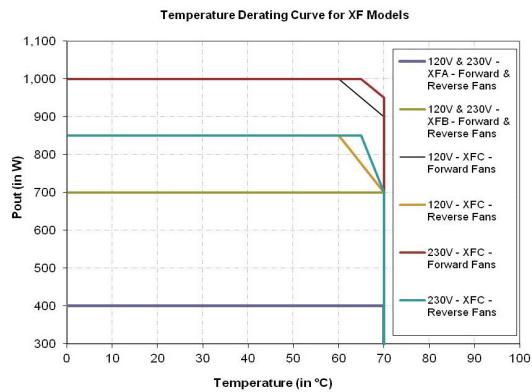
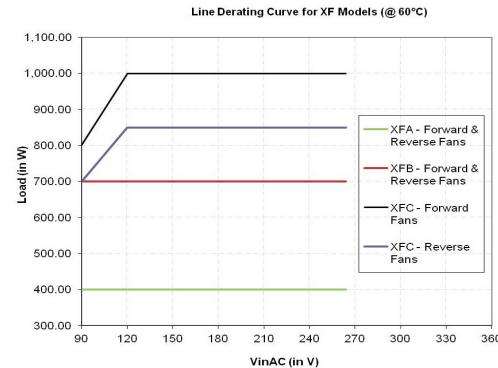
J4 Connector : M4 Screw  
J3 Connector Mating Connector  
Housing: Locking Molex 51110-0860  
Non Locking Molex 51110-0850  
Crimp Terminal: Molex p/n 50394

\*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

**TYPE B : Xg8**

J4 Connector : Camden 9200/4A  
J3 Connector Mating Connector  
Housing: Locking Molex 51110-0860  
Non Locking Molex 51110-0850  
Crimp Terminal: Molex p/n 50394

\*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

**XF Series Derating Curves****XF Series Derating Curves****powerMods** (for use with all powerPac models)

MODEL	Vmin Vtrim	Vnom Vpot *	Vmax	Imax	Watts
Xg1C	1.0	1.5	2.5	3.6	50A 125W
Xg2C	1.5	3.2	5.0	6.0	40A 200W
Xg3C	4.0	6.0	12.0	15.0	20A 240W
Xg4C	8.0	12.0	24.0	28.0	10A 240W
Xg5C	8.0	24.0	48.0	53.0	6A 288W
Xg7C	5.0	5.0	24.0	28.0	5A 120W
Xg8Cv1	5.0	5.0	24.0	28.0	2.5A 60W
V2	5.0	5.0	24.0	28.0	2.5A 60W

\*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

**Part Numbering**

**Configured Units** may be specified and ordered using the part numbering system shown opposite. For example, part number XFC123420S01 specifies the following 1000W power supply.

- XFC01 powerPac 1000W powerPac
- Xg1C 2.5V @ 50A powerMod
- Xg2C 5V @ 40A powerMod
- Xg3C 12V @ 20A powerMod
- Xg4C 24V @ 10A powerMod
- Xg2C 5V @ 40A powerMod

**Accessories**

PowerMods can be parallel connected for higher current and series connected for higher voltages. Configured units will have parallel and series links fitted as required.

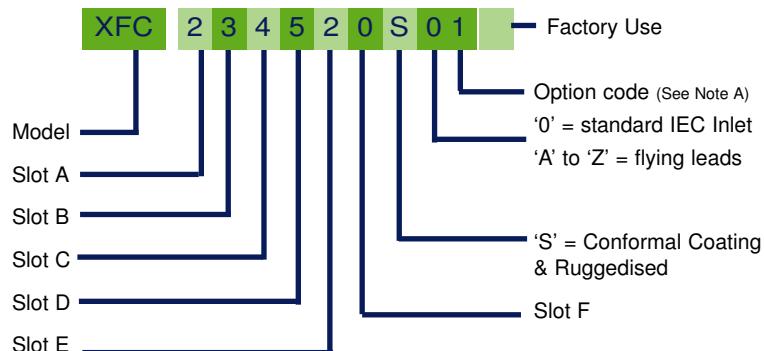
**Powerpac Connector Options**

The default AC input connector is IEC however Xgen can also be supplied with a 3-wire input cable.

**powerPacs** (6slot package, 127mm wide)

MODEL	Watts
XFA	400W
XFB	700W
XFC	1000W

Conformal Coated powerMods, Xg1C to Xg8C, MUST be used with XF powerpacs



**Note A: Option Codes**

1= Standard Model (with Thermal Signals)  
3= Reverse Fan  
5= Low Leakage Current  
7= Low Leakage Current & Reverse Fan

