


Bulk Metal® Foil Ultra High Technology Precision Trimming Potentiometers, 1 1/4" Rectilinear, RJ12 Style, Designed to Meet or Exceed The Requirements of MIL-PRF-22097, Char. F with Smooth and Unidirectional Output

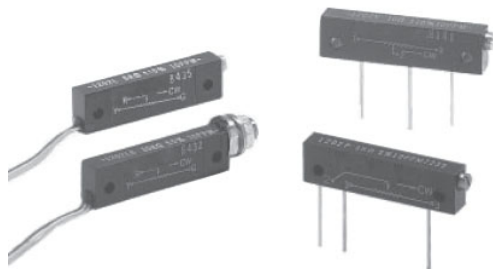

INTRODUCTION

Vishay Foil precision trimmers have the Bulk Metal® Foil resistive element which possesses a unique inherent temperature and load life stability. Plus, their advanced virtually back lash-free adjustment mechanism makes them easy to set quickly and accurately and keeps the setting exactly on target.

FEATURES

- Temperature coefficient of resistance (TCR): ± 10 ppm/°C maximum ⁽³⁾ (- 55 °C to + 150 °C ref. at + 25 °C); through the wiper ⁽⁴⁾; ± 25 ppm/°C
- A smooth and unidirectional resistance with leadscrew adjustment
- Load life stability: 0.1 % typical ΔR , 0.5 % maximum ΔR under full rated power at + 85 °C** for 2000 h
- Settability: 0.05 % typical; 0.1 % maximum
- Setting stability: 0.1 % typical; 0.5 % maximum, ΔSS
- Power rating: 0.5 W at + 85 °C
- Resistance range: 2 Ω to 20 k Ω
- "O"-ring prevents ingress of fluids during any board cleaning operation
- Electrostatic discharge (ESD) up to 25 000 V
- Terminal finish: gold plated (tin/lead finish is available on request; see notes at figures 1 and 2)



RoHS*
COMPLIANT






TABLE 1 - MODEL SELECTION

MODEL	TERMINATION STYLE	AVERAGE WEIGHT (g)	POWER RATING at + 85 °C AMBIENT	NO. OF TURNS
1202	P-In line PC pins	2.5	0.5 W	25 $\pm$ 2
	Y-staggered PC pins ⁽¹⁾	2.5		
	L-flexible wire leads	3.3		
	LB-flexible wire leads with bushings (panel mounted)	5.1		

Note

- See Figures 1 and 2

TABLE 2 - VALUES VS. TOLERANCES

STANDARD RESISTANCE VALUES (in Ω)	STANDARD TOLERANCES
2, 5, 10 ⁽²⁾	± 10 %, ± 20 %
20, 50, 100, 200, 250, 500, 1K, 2K, 5K, 10K, 20K	5 %, 10 %

Note

- Refer to page 4 for footnotes
- * Pb containing terminations are not RoHS compliant, exemptions may apply

** See a definition of typical in the VPG glossary at the link <http://www.vishaypg.com/foil-resistors/faq/glossary/>

TABLE 3 - 1202 (RJ12) SERIES ELECTRICAL SPECIFICATIONS

Temperature Coefficient of Resistance (TCR), 50 Ω and up: End-to-end ⁽³⁾ : ± 10 ppm/°C (- 55 °C to + 150 °C, ref. + 25 °C) 2 Ω , 5 Ω , 10 Ω , 20 Ω : ± 20 ppm/°C (- 55 °C to + 150 °C, ref. + 25 °C) Through the wiper ⁽⁴⁾ : ± 25 ppm/°C (- 55 °C to + 150 °C, ref. + 25 °C)
Stability: Load life at 2000 h, under full rated power of 0.5 W at + 85 °C; 0.1 % typical ΔR ; 0.5 % maximum ΔR Load life at 10 000 h, under full rated power of 0.5 W at + 85 °C; 0.1 % typical ΔR ; 1.0 % maximum ΔR
Power Rating ⁽⁵⁾: 0.5 W at + 85 °C
Settability: 0.05 % typical; 0.1 % maximum
Setting Stability: 0.1 % typical; 0.5 % maximum
Contact Resistance variation - CRV (noise): 3 Ω typical; 10 Ω maximum
Hop-off: 0.25 % typical; 1.0 % maximum
High-Frequency Operation to 100 MHz: Rise time: 10 ns at 1 k Ω Inductance: 0.08 μ H typical Capacitance: 0.5 pF typical
Operating Temperature Range: - 55 °C to + 150 °C


TABLE 4 - MECHANICAL SPECIFICATIONS

Adjustment Turns	25 ± 2	Case Material	Glass fortified diallyl-phthalate (DAP); black
Mechanical Stops	Wiper idles - no discontinuity	Shaft Torque	8 oz. in. maximum; 3 oz. in. typical
Internal Terminations	All welded - no flux	Backlash	0.05 % typical

FIGURE 1 - SCHEMATIC AND DIMENSIONS FOR PIN STYLES in Inches (Millimeters)


1202P

(In-Line Pins) ⁽¹⁾

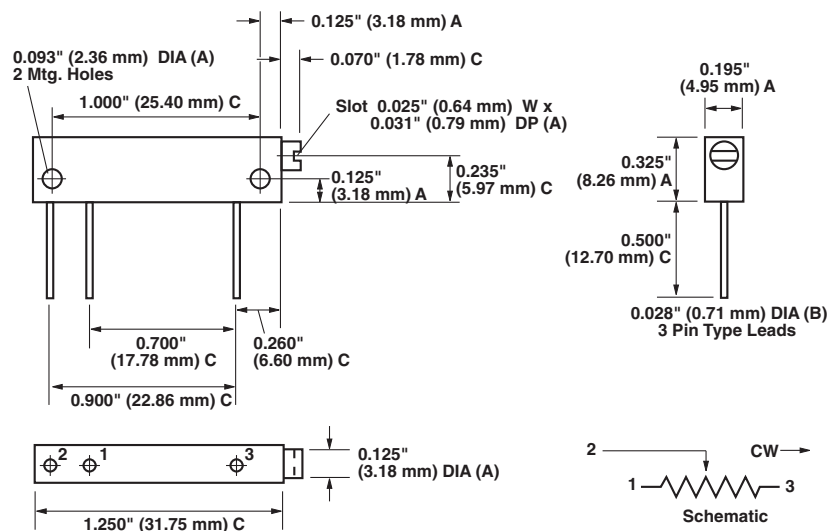

1202Y

(Staggered Pins) ⁽¹⁾

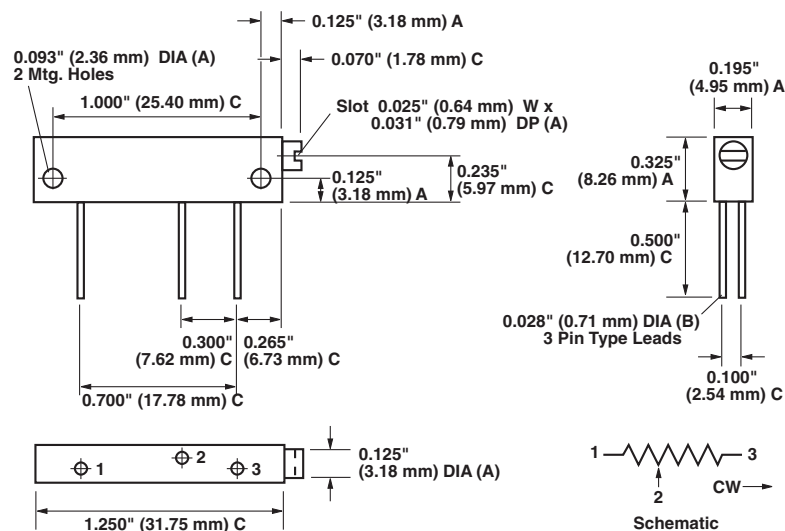

TOLERANCES:

A = ± 0.005" (0.13 mm)

B = ± 0.003" (0.08 mm)

C = ± 0.010" (0.25 mm)

Note

⁽¹⁾ Pin leads are gold plated nickel which are solderable or weldable.

STANDARD MARKING ILLUSTRATION:


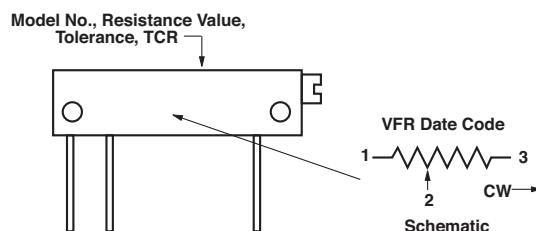


FIGURE 2 - SCHEMATIC AND DIMENSIONS FOR FLEXIBLE WIRE STYLES in Inches (Millimeters)


1202L

(Flexible Leads)⁽²⁾

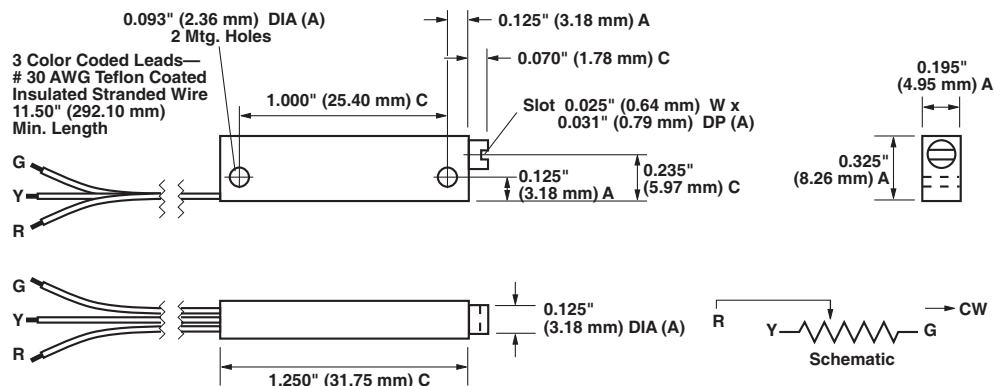

1202LB

(Panel Mounted)⁽²⁾

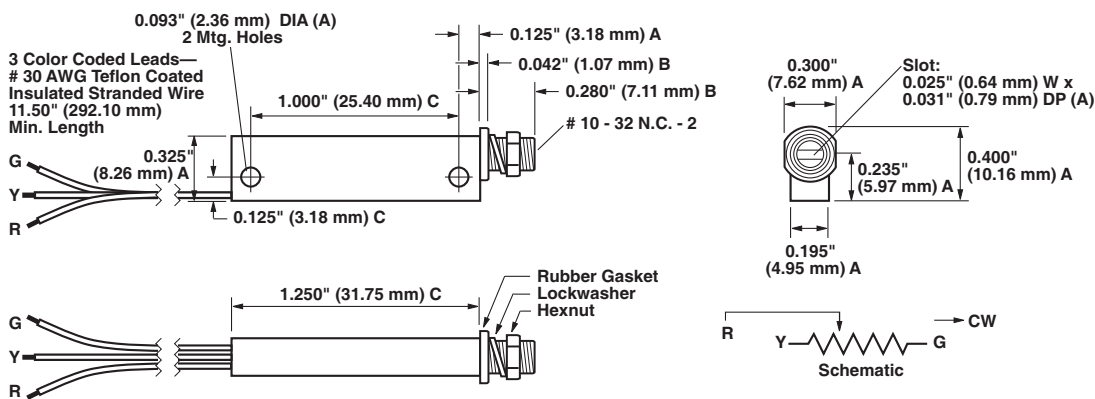

TOLERANCES:

A = ± 0.005" (0.13 mm)

B = ± 0.003" (0.08 mm)

C = ± 0.010" (0.25 mm)

Standard marking shown on previous page.

Note

(2) Wire terminations: silver plated copper.

FIGURE 3 - POWER DERATING CURVE

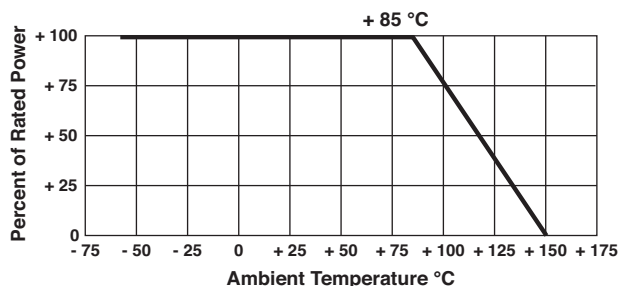


TABLE 5 - COMPARISON

	MIL-PRF-22097/2 CHARACTERISTIC F	1202 MAXIMUM (Worst Case) ⁽⁶⁾
TEST GROUP I Visual and mechanical Total resistance Actual effective electrical travel End resistance Contact resistance variation - CRV (noise) Dielectric withstanding voltage - DWV Per MIL-STD-202, methods 301 and 105 Atmospheric pressure Barometric pressure Insulation resistance Shaft torque Thermal shock	No failures $\pm 10\%$ 17 to 27 turns $\pm 2\%$ or $20\ \Omega$ ⁽⁷⁾ $\pm 3.0\%$ or $3\ \Omega$ ⁽⁷⁾ 900 V _{AC} , 1 min 350 V _{AC} , 1 min $\geq 1000\ M\Omega$ 8 oz. in. maximum $\pm 1.0\%$	No failures $\pm 10\%$ 25 ± 2 turns 2 Ω 3 Ω typical, 10 Ω maximum 900 V _{AC} , 1 min 350 V _{AC} , 1 min $\geq 1000\ M\Omega$ 8 oz. in. maximum $\pm 1.0\%$
TEST GROUP II Resistance temperature characteristic - TCR Moisture resistance Contact resistance variation - CRV (noise)	$\pm 0.01\%$ ($\pm 100\ \text{ppm}/^\circ\text{C}$) $\pm 1.0\%$ 3.0 % or 3 Ω ⁽⁷⁾	$\pm 0.001\%$ ($\pm 10\ \text{ppm}/^\circ\text{C}$) $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum
TEST GROUP III Shock (specified pulse) Vibration (high-frequency) Contact resistance variation - CRV (noise) Salt spray	$\pm 1.0\%$ $\pm 1.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾ No corrosion	$\pm 0.5\%$ $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum No corrosion
TEST GROUP IV Solder heat Life (1000 h at + 85 °C) ⁽⁸⁾ Contact resistance variation - CRV (noise)	$\pm 1.0\%$ $\pm 2.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾	$\pm 0.05\%$ $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum
TEST GROUP V Low-temperature operation High-temperature exposure Contact resistance variation - CRV (noise)	$\pm 1.0\%$ $\pm 2.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾	$\pm 0.5\%$ $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum
TEST GROUP VI Rotational life Contact resistance variation - CRV (noise) Terminal strength	$\pm 2.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾ 2 lbs	$\pm 2.0\%$ 3 Ω typical, 10 Ω maximum 2 lbs
TEST GROUP VII Solderability (excluding terminations L and LB) Immersion (excluding terminations L and LB)	MIL-STD-202 method 208 No continuous stream of bubbles	MIL-STD-202 method 208 No continuous stream of bubbles
TEST GROUP VIII Fungus	MIL-STD-810 method 508 No mechanical damage	MIL-STD-810 method 508 No mechanical damage

Notes

- (1) Preferred termination style for current 1-1/4 inch rectilinear trimmers (staggered PC pins present a sturdier mounting arrangement for shock, vibration, and impact situations).
- (2) 10 Ω at $\pm 5\%$ available on special order.
- (3) Maximum TCR applies to the 3 σ (sigma) limit or 99.73 % of a production lot. (Measured end-to-end with wiper off the element.)
- (4) Measurements of TCR through the wiper are influenced more by setting stability and the percentage of the total resistance in use (at the wiper) than by fundamental resistance change due to temperature alone. The parameter shown in Table 3 is a 2 σ distribution typifying the behavior of the device when used with 40 % or more of the total resistance in use.
- (5) Derated linearly from full power at + 85 °C to zero power at + 150 °C. See Figure 3 in this datasheet.
- (6) All ΔR 's are measured to the tolerance specified + 0.01 Ω .
- (7) Whichever is greater.
- (8) Load-Life test performed at nominal rated power, 0.5 W, at + 85 °C.

Special Available Options:

- Special marking
- Special lengths for lead wires (L, LB Style)
- Hooked leads
- Alternate bushing and PC combinations
- Power conditioning and screening operations

VFR TRIMMERS ARE INSPECTED


100 % for:

- Immersion
- Resistance tolerance check
- End resistance
- Visual-mechanical
- Dynamic tests for continuity, CRV

By sample for:

- TCR
- DWV

Circuit A is a conventional circuit employing a high value wire wound trimmer (4) linearized by two padding resistors (1 and 2) for the purpose of trimming resistor (3) to within less than 100 ppm absolute resistance.

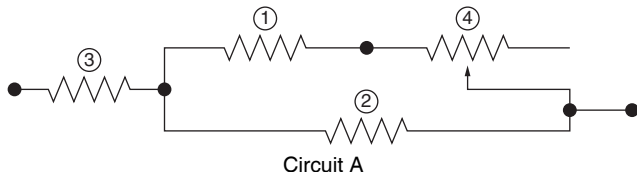

Circuit B uses only a low value infinite resolution Vishay trimming potentiometer (5) to accomplish the same results. Saving in cost and board space is achieved. A low value wire wound trimmer cannot be used because of poor resolution.

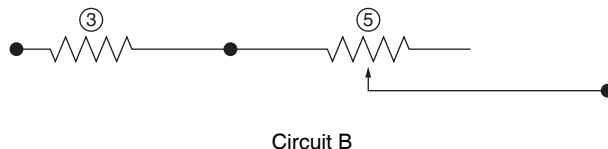


TABLE 6 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y5050500R000K0L (preferred part number format)

DENOTES PRECISION	VALUE	CHARACTERISTICS ⁽³⁾
Y	R = Ω K = k Ω	0 = gold plated pins (lead (Pb)-free) 0 = silver plated copper wire terminations (lead (Pb)-free); styles L & LB 1 to 999 = custom
Y 5 0 5 0	5 0 0 R 0 0 0 K 0 L	
PRODUCT CODE	TOLERANCE	PACKAGING
5050 = 1202L ⁽²⁾ 0050 = 1202LB ⁽²⁾ 0051 = 1202P ⁽¹⁾ 6050 = 1202PB ⁽¹⁾ 5051 = 1202Y ⁽¹⁾ 7050 = 1202YB ⁽¹⁾	J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$	L = foam/box pack

FOR EXAMPLE: ABOVE GLOBAL ORDER Y5050 500R000 K 0 L:

TYPE: 1202L

VALUE: 500.0 Ω

ABSOLUTE TOLERANCE: $\pm 10.0\%$

TERMINATION: gold plated (lead (Pb)-free)

PACKAGING: foam/box pack

HISTORICAL PART NUMBER: 1202L 500R00 K B (will continue to be used)

1202L	500R00	K	B
MODEL	RESISTANCE VALUE	TOLERANCE	PACKAGING
1202L ⁽²⁾ 1202LB ⁽²⁾ 1202P ⁽¹⁾ 1202PB ⁽¹⁾ 1202Y ⁽¹⁾ 1202YB ⁽¹⁾	500.0 Ω	J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$	B = bulk pack

Notes

(1) Pin leads are gold plated nickel which are solderable or weldable (lead (Pb)-free).

(2) Wire terminations: silver plated cooper (lead (Pb)-free).

(3) For non-standard requests, please contact application engineering.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay Precision Group:](#)

[Y505120K0000K0L](#) [Y505120K0000J0L](#) [Y005010K0000J0L](#) [Y505110K0000K0L](#) [Y50512K00000J0L](#)
[Y505110K0000J0L](#) [Y50515K00000J0L](#)