


Bulk Metal® Foil Ultra High Technology Precision Trimming Potentiometers, 1 1/4" Rectilinear, RJ12 Style, Designed to Meet or Exceed The Requirements of MIL-PRF-22097, Char. F with Smooth and Unidirectional Output

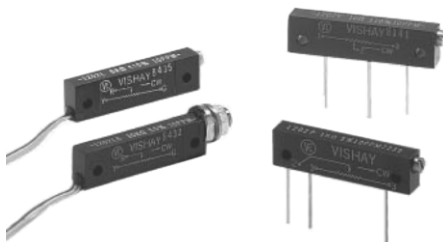

INTRODUCTION

Vishay Foil precision trimmers have the Bulk Metal® Foil resistive element which possesses a unique inherent temperature and load life stability. Plus, their advanced virtually back lash-free adjustment mechanism makes them easy to set quickly and accurately and keeps the setting exactly on target.

FEATURES

- Temperature coefficient of resistance (TCR): ± 10 ppm/°C maximum ⁽³⁾ (- 55 °C to + 150 °C ref. at + 25 °C); through the wiper ⁽⁴⁾; ± 25 ppm/°C
- A smooth and unidirectional resistance with leadscrew adjustment
- Load life stability: 0.1 % typical ΔR , 0.5 % maximum ΔR under full rated power at + 85 °C for 2000 h
- Settability: 0.05 % typical; 0.1 % maximum
- Setting stability: 0.1 % typical; 0.5 % maximum, ΔSS
- Power rating: 0.5 W at + 85 °C
- Resistance range: 2 Ω to 20 k Ω
- "O"-ring prevents ingress of fluids during any board cleaning operation
- Electrostatic discharge (ESD) up to 25 000 V
- Terminal finish: gold plated (tin/lead finish is available on request)



RoHS*
COMPLIANT






TABLE 1 - MODEL SELECTION

MODEL	TERMINATION STYLE	AVERAGE WEIGHT (g)	POWER RATING at + 85 °C AMBIENT	NO. OF TURNS
1202	P-In line PC pins	2.5	0.5 W	25 $\pm$ 2
	Y-staggered PC pins ⁽¹⁾	2.5		
	L-flexible wire leads	3.3		
	LB-flexible wire leads with bushings	5.1		

TABLE 2 - VALUES VS. TOLERANCES

STANDARD RESISTANCE VALUES (in Ω)	STANDARD TOLERANCES
2, 5, 10	± 10 % ⁽²⁾ , ± 20 %
20, 50, 100, 200, 250, 500, 1K, 2K, 5K, 10K, 20K	5 %, 10 %

Note

- See Figures 1 and 2

TABLE 3 - 1202 (RJ12) SERIES ELECTRICAL SPECIFICATIONS

Temperature Coefficient of Resistance (TCR), 50 Ω and up End-to-end ⁽³⁾ 2 Ω , 5 Ω , 10 Ω , 20 Ω Through the wiper ⁽⁴⁾	± 10 ppm/°C maximum (- 55 °C to + 25 °C) ± 10 ppm/°C maximum (+ 25 °C to + 150 °C) ± 20 ppm/°C (- 55 °C to + 150 °C, ref. + 25 °C) ± 25 ppm/°C (- 55 °C to + 150 °C, ref. + 25 °C)
Stability Load life at 2000 h, under full rated power of 0.5 W at + 85 °C Load life at 10 000 h, under full rated power of 0.5 W at + 85 °C	0.1 % typical ΔR ; 0.5 % maximum ΔR 0.1 % typical ΔR ; 1.0 % maximum ΔR
Power Rating ⁽⁵⁾	0.5 W at + 85 °C
Settability	0.05 % typical; 0.1 % maximum
Setting Stability	0.1 % typical; 0.5 % maximum
Contact Resistance variation - CRV (noise)	3 Ω typical; 10 Ω maximum
Hop-off	0.25 % typical; 1.0 % maximum
High-Frequency Operation Rise time Inductance Capacitance	to 100 MHz 10 ns at 1 k Ω 0.08 μ H typical 0.5 pF typical
Operating Temperature Range	- 55 °C to + 150 °C

Note

- Refer to page 4 for footnotes

* Pb containing terminations are not RoHS compliant, exemptions may apply


TABLE 4 - MECHANICAL SPECIFICATIONS

Adjustment Turns	25 ± 2	Case Material	Glass fortified diallyl-phthalate (DAP); black
Mechanical Stops	Wiper idles - no discontinuity	Shaft Torque	8 oz. in. maximum; 3 oz. in. typical
Internal Terminations	All welded - no flux	Backlash	0.05 % typical

FIGURE 1 - SCHEMATIC AND DIMENSIONS in Inches (Millimeters)


1202P

(In-Line Pins) ⁽¹⁾

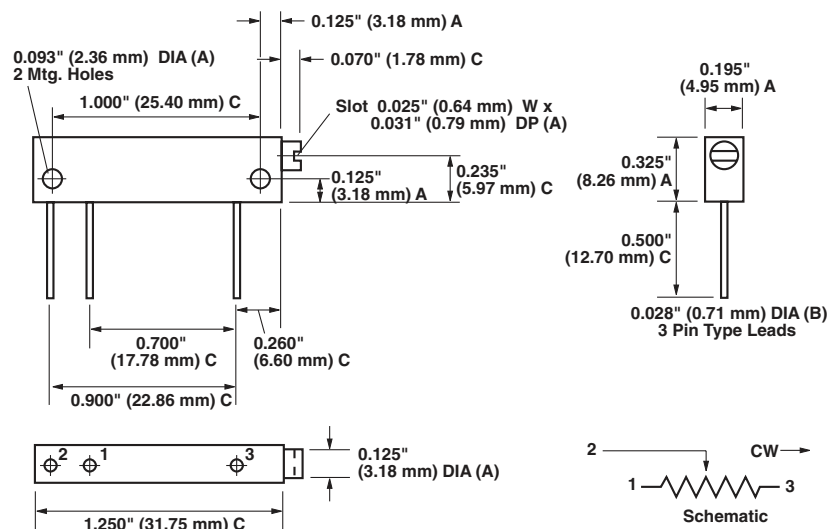

1202Y

(Staggered Pins) ⁽¹⁾

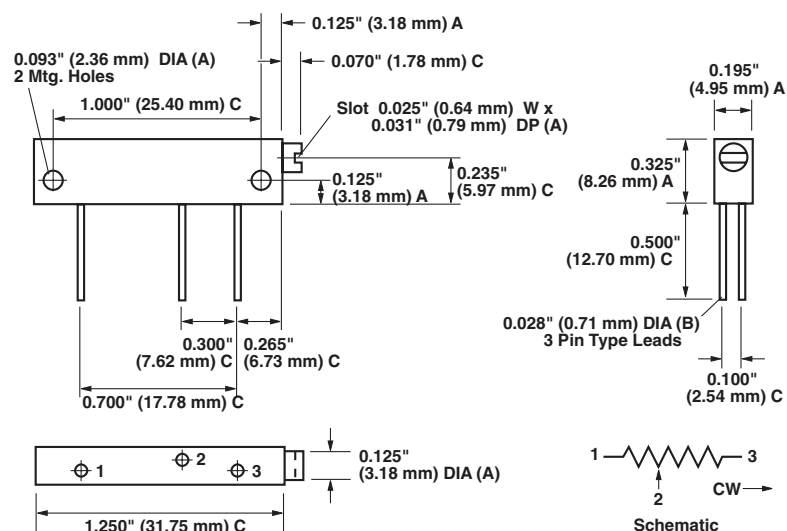

TOLERANCES:

A = ± 0.005" (0.13 mm)

B = ± 0.003" (0.08 mm)

C = ± 0.010" (0.25 mm)

Note

⁽¹⁾ Pin leads are gold plated nickel which are solderable or weldable.

STANDARD MARKING ILLUSTRATION:



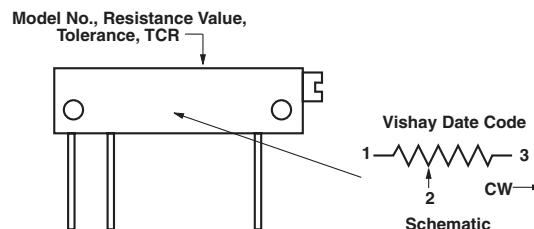


FIGURE 2 - SCHEMATIC AND DIMENSIONS in Inches (Millimeters)

1202L (Flexible Leads)

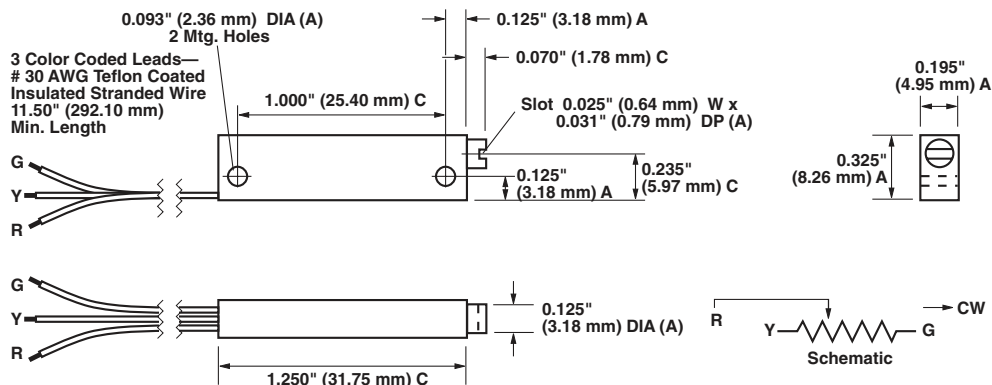

1202LB (Panel Mounted)

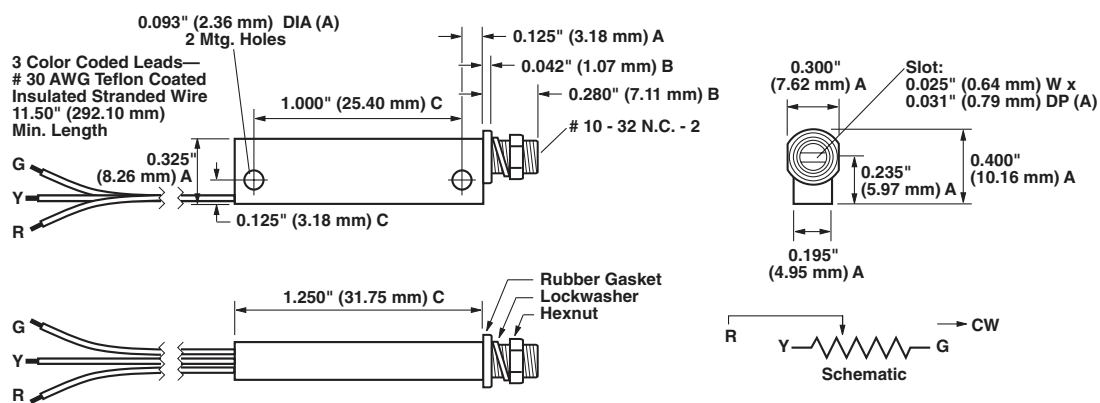

TOLERANCES:

A = ± 0.005 " (0.13 mm)

B = ± 0.003 " (0.08 mm)

C = ± 0.010 " (0.25 mm)

Standard marking shown on previous page.

FIGURE 3 - POWER DERATING CURVE

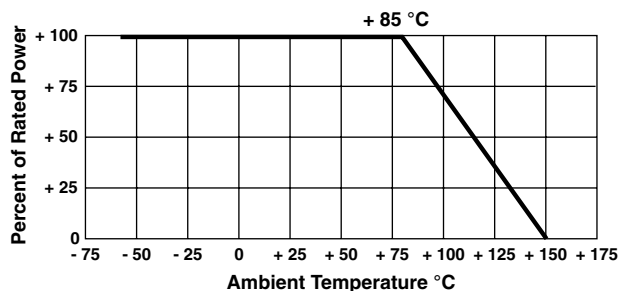


TABLE 5 - COMPARISON

	MIL-PRF-22097/2 CHARACTERISTIC F ⁽⁷⁾	1202 MAXIMUM (Worst Case)
TEST GROUP I Visual and mechanical Total resistance Actual effective electrical travel End resistance Contact resistance variation - CRV (noise) Dielectric withstanding voltage - DWV Per MIL-STD-202, methods 301 and 105 Atmospheric pressure Barometric pressure Insulation resistance Shaft torque Thermal shock	No failures $\pm 10\%$ 17 to 27 turns $\pm 2\%$ or $20\ \Omega$ ⁽⁷⁾ $\pm 3.0\%$ or $3\ \Omega$ ⁽⁷⁾ 900 V _{AC} , 1 min 350 V _{AC} , 1 min $\geq 1000\ M\Omega$ 8 oz. in. maximum $\pm 1.0\%$	No failures $\pm 10\%$ 25 ± 2 turns 2 Ω 3 Ω typical, 10 Ω maximum 900 V _{AC} , 1 min 350 V _{AC} , 1 min $\geq 1000\ M\Omega$ 8 oz. in. maximum $\pm 1.0\%$
TEST GROUP II Resistance temperature characteristic - TCR Moisture resistance Contact resistance variation - CRV (noise)	$\pm 0.01\%$ ($\pm 100\ \text{ppm}/^\circ\text{C}$) $\pm 1.0\%$ 3.0 % or 3 Ω ⁽⁷⁾	$\pm 0.001\%$ ($\pm 10\ \text{ppm}/^\circ\text{C}$) $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum
TEST GROUP III Shock (specified pulse) Vibration (high-frequency) Contact resistance variation - CRV (noise) Salt spray	$\pm 1.0\%$ $\pm 1.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾ No corrosion	$\pm 0.5\%$ $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum No corrosion
TEST GROUP IV Solder heat Life (1000 h at + 85 $^\circ\text{C}$) ⁽⁸⁾ Contact resistance variation - CRV (noise)	$\pm 1.0\%$ $\pm 2.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾	$\pm 0.05\%$ $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum
TEST GROUP V Low-temperature operation High-temperature exposure Contact resistance variation - CRV (noise)	$\pm 1.0\%$ $\pm 2.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾	$\pm 0.5\%$ $\pm 0.5\%$ 3 Ω typical, 10 Ω maximum
TEST GROUP VI Rotational life Contact resistance variation - CRV (noise) Terminal strength	$\pm 2.0\%$ $\pm 3.0\%$ or 3 Ω ⁽⁷⁾ 2 lbs	$\pm 2.0\%$ 3 Ω typical, 10 Ω maximum 2 lbs
TEST GROUP VII Solderability (excluding terminations L and LB) Immersion (excluding terminations L and LB)	MIL-STD-202 method 208 No continuous stream of bubbles	MIL-STD-202 method 208 No continuous stream of bubbles
TEST GROUP VIII Fungus	MIL-STD-810 method 508 No mechanical damage	MIL-STD-810 method 508 No mechanical damage

Notes

- (1) Preferred termination style for current 1-1/4 inch rectilinear trimmers (staggered PC pins present a sturdier mounting arrangement for shock, vibration, and impact situations).
- (2) 10 Ω at $\pm 5\%$ available on special order.
- (3) Maximum TCR applies to the 3 σ (sigma) limit or 99.73 % of a production lot. (Measured end-to-end with wiper off the element.)
- (4) Measurements of TCR through the wiper are influenced more by setting stability and the percentage of the total resistance in use (at the wiper) than by fundamental resistance change due to temperature alone. The parameter shown in Table 3 is a 2 σ distribution typifying the behavior of the device when used with 40 % or more of the total resistance in use.
- (5) Derated linearly from full power at + 85 $^\circ\text{C}$ to zero power at + 150 $^\circ\text{C}$. See Figure 3 in this datasheet.
- (6) All ΔR 's are measured to the tolerance specified + 0.01 Ω .
- (7) Whichever is greater.
- (8) Load-Life test performed at nominal rated power, 0.5 W, at + 85 $^\circ\text{C}$.

Special Available Options:

- Special marking
- Special lengths for lead wires (L, LB Style)
- Hooked leads
- Alternate bushing and PC combinations
- Power conditioning and screening operations

VISHAY TRIMMERS ARE INSPECTED


100 % for:

- Immersion
- Resistance tolerance check
- End resistance
- Visual-mechanical
- Dynamic tests for continuity, CRV

By sample for:

- TCR
- DWV

Circuit A is a conventional circuit employing a high value wire wound trimmer (4) linearized by two padding resistors (1 and 2) for the purpose of trimming resistor (3) to within less than 100 ppm absolute resistance.

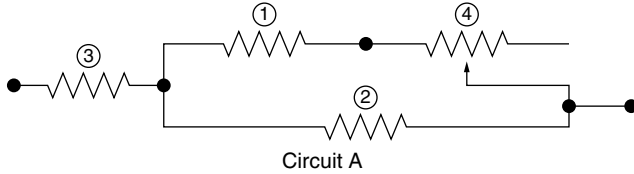

Circuit B uses only a low value infinite resolution Vishay trimming potentiometer (5) to accomplish the same results. Saving in cost and board space is achieved. A low value wire wound trimmer cannot be used because of poor resolution.


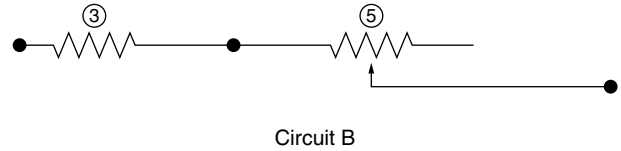


TABLE 6 - GLOBAL PART NUMBER INFORMATION


NEW GLOBAL PART NUMBER: Y5050500R000K0L (preferred part number format)

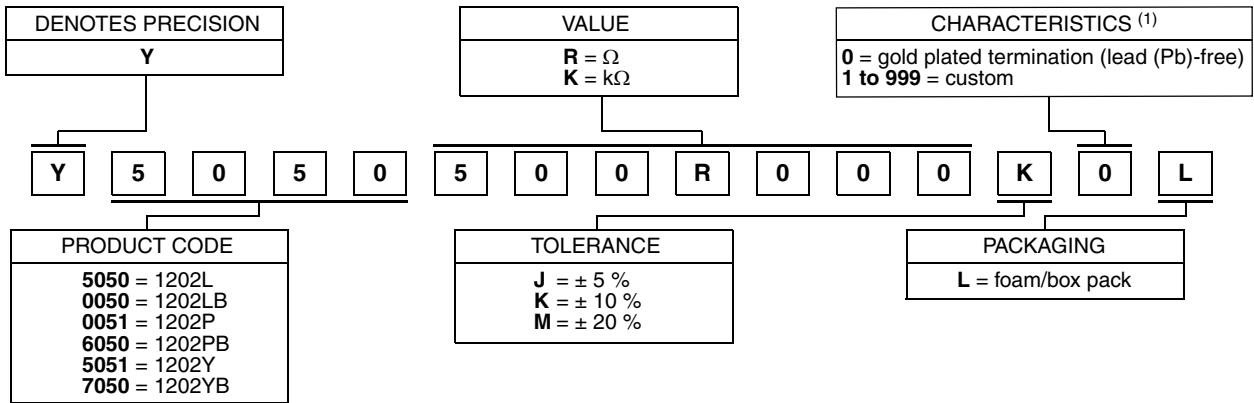

FOR EXAMPLE: ABOVE GLOBAL ORDER Y5050 500R000 K 0 L:

TYPE: 1202L
 VALUE: 500.0 Ω
 ABSOLUTE TOLERANCE: $\pm 10.0\%$
 TERMINATION: gold plated (lead (Pb)-free)
 PACKAGING: foam/box pack

HISTORICAL PART NUMBER: 1202L 500R00 K B (will continue to be used)

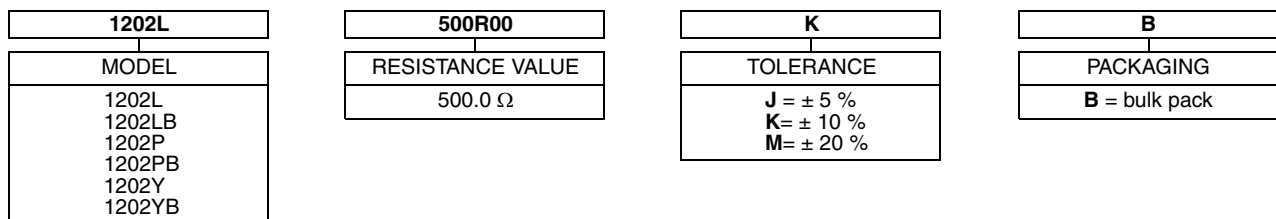

Note

⁽¹⁾ For non-standard requests, please contact application engineering.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.