


Double-Pole Rocker Switch **YR Series**

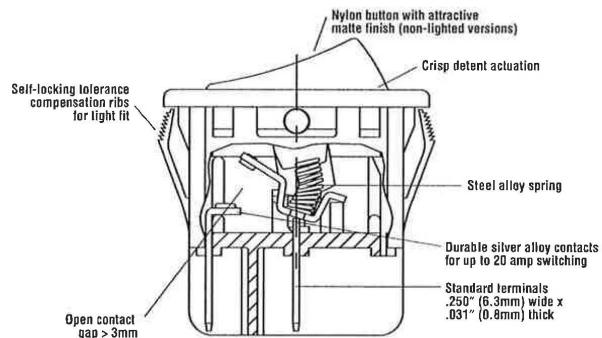

Features

- High current rating to 20 amps
- Lighted and non-lighted
- Maintained action and momentary
- Mechanical life: min. 50,000 operations

Electrical Ratings				
Switch Series	EN61058 Rating	UL1054 Rating	Electrical Life at Rated Load	
			According to VDE (Min. Operations)	According to UL (Min. Operations)
YRM	16(4)A 250V ~ T125/55 16(8)A 250V ~ T125/55	20A, 125VAC; 16A 125/250VAC; 3/4 HP 125/250VAC	10,000	6,000

Electrical Specifications		Material Specifications	
Ratings:	20A 125VAC; 16A 125/250VAC, 3/4 HP 125/250VAC cULus 16(4)A 250V ~ T125/55 VDE 16(8)A 250V ~ T125/55 VDE	Actuator (non-lighted): (lighted):	Nylon 66 94V-2 Polycarbonate
Dielectric Strength:	1000VAC for 1 minute	Base:	Nylon 66 94V-2
Insulation Resistance:	10^8 ohms min at 500VDC	Spring:	Steel Wire
Initial Contact Resistance:	0.020 ohms max	Contacts:	Silver Alloy
Temperature Range:	0°C to + 85°C UL	Movable Arm:	Silver-Plated Copper Alloy
		Terminals:	Tin-Plated Copper Alloy

RoHS Compliant
UL File No: E23301


Specifications subject to change without notice.



CHERRY 

Double-Pole Rocker Switch YR Series

Dimensions inches (mm)

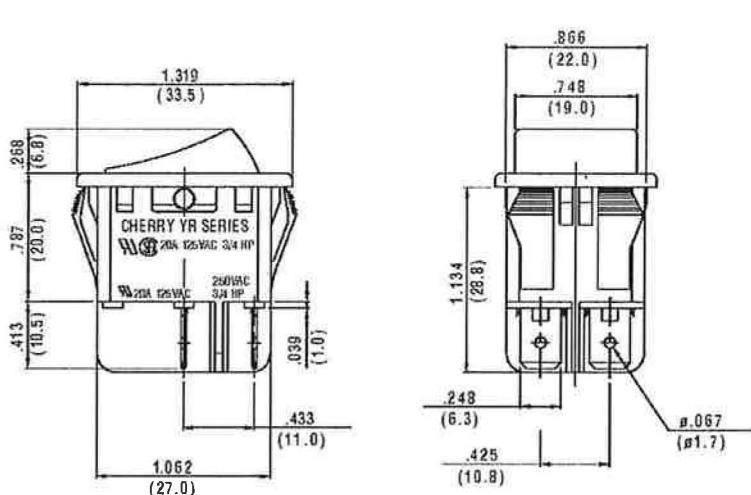

Z = Panel Thickness

Recommended Panel Cut-Out Dimensions

inches (mm)

Dim. Z	Dim. X	Dim. Y
0.030 to 0.049 (.75 to 1.25)	1.181 (30.00)	0.866 (22.0)
0.049 to 0.079 (1.25 to 2.00)	1.189 (30.2)	0.866 (22.0)
0.079 to 0.118 (2.00 to 3.00)	1.201 (30.5)	0.866 (22.0)

Ordering Information

YR	M	3
Series		Code
		Circuitry
		2 Single Pole
		3 Double Pole

Code	Contact Rating
M	16A 125/250VAC 3/4 HP 20A 125VAC cULus 16(4) A 250V ~ T12555 VDE 16(8) A 250V ~ T12555 VDE
	Note: 10(2)A 250V ~ 50E3 T125 special order

2	Code	Switch Function
2		On - Off
3		On - On
5		(On) - Off
6		(On) - On

2	Code	Actuator Type
2		Curve

	Code	Actuator Marking
	B	Blank
	C	○ ─
	D	○ ○
	E	○ I
	F	○ -

B	Code	Housing Color
B		Black
W		White
Y		Grey

N	Code	Lighted
N		Non-Lighted
L		Lighted (Bulb 125VAC)
E		Lighted (Bulb 250VAC)
F		Lighted 5VDC Incandescent
G		Lighted 6VDC Incandescent
H		Lighted 12VDC Incandescent

Code	Splashproof
N	No Rocker Boot

Rocker boot sold separately: P/N 0015-0646

Examples of Common Part Numbers and Descriptions

Part Number	Circuitry	Switch Function	Terminal Type	Actuator/Housing Color	Legend Marking
YRM32F2FBNN	—	On - Off	0.250 (6.3) Quick-Connect	Black/Black	○ -
YRM33F2BBNN	—	On - On	0.250 (6.3) Quick-Connect	Black/Black	—
YRM32F2BBRLN	—	On - Off/Lighted	0.250 (6.3) Quick-Connect	Red/Black	—

Contact

Call, fax or visit our Website for more information.

ZF Electronics Corporation
11200 88th Avenue
Pleasant Prairie, WI 53158

Phone: 262.942.6500
Web: www.cherrycorp.com
Email: cep_sales@zf.com
Fax: 262.942.6566

The manufacturer accepts no liability for errors or non-availability, and reserves the right to change specifications without prior notice.

Technical data relates to product specifications only. Features may differ from those described. Only drawings combined with product specifications shall be deemed binding.

© 2007 ZF Electronics Corporation

Last Updated: 10/01/12

CHERRY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CHERRY](#):

[YRM32F2BBRLN](#) [YRM32F2FBBNN](#) [YRM33F2BBBNN](#) [YRM32F2BBBNN](#)