


Chip Bead, 0402 (1005 metric), 33 Ohm, +/-25% Tol, 100 MHz, 700 mA

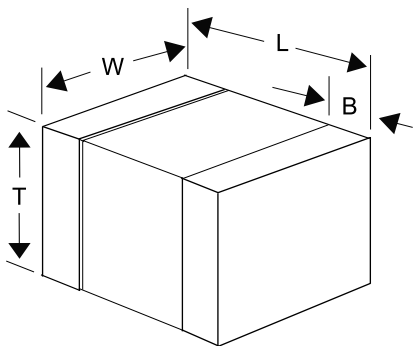

| Dimensions (mm) | | |
|-----------------|-----------|-----------|
| Symbol | Dimension | Tolerance |
| L | 1 | +/-0.05 |
| W | 0.5 | +/-0.05 |
| T | 0.5 | +/-0.05 |
| B | 0.25 | +/-0.1 |

| Packaging Specifications | |
|--------------------------|-------|
| Package Kind: | T&R |
| Package Quantity: | 10000 |

| General Information | |
|------------------------|--|
| Supplier: | KEMET |
| Part Type Description: | Chip Bead Signal Line |
| Application: | General Purpose |
| Features: | Suppresses The XL Component; Helps Stop The Reduction Of The Wave-Form Integrity |
| Chip Size: | 0402 (1005 metric) |

| Specifications | |
|-------------------------|-----------------|
| Impedance: | 33 Ohm |
| Test Frequency: | 100 MHz |
| Tolerance: | +/-25% |
| Temperature Range: | -55/+125C |
| Resistance/ESR: | 0.1 Ohms |
| Current/Ripple Current: | 700 mAmps (MAX) |
| RoHS: | Yes |