

ZUP SERIES


Programmable CVCC 200W ~ 800W 19Model




■ Features

- Constant Voltage/Constant Current
- Built-in RS232 & RS485 Interface
- An embedded Microprocessor controller
- Digital Encoder Knob
- Software Calibration
- Last Setting Memory
- Parallel Operation (Master/Slave) Active Current Sharing
- External Voltage or Resistance Programming
- Voltage up to 120V, Current up to 132A
- Active Power Factor Correction: 99%
- 85~265Vac Universal Input Voltage
- 19" Rack Mounted ATE and OEM
- Worldwide Safety Agency Approvals
- CE Mark for LVD and EMC Regulation

■ Model naming method

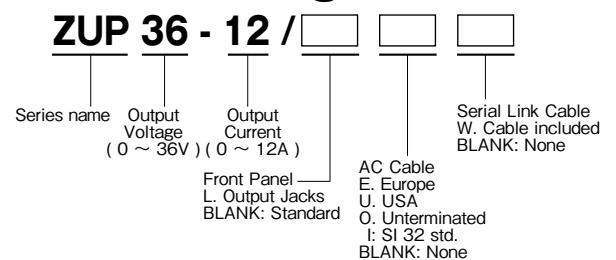

■ Applications



■ Conformity to RoHS Directive

This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

■ Product Line up

	200W		400W		800W	
Output Voltage	Output Current	Model	Output Current	Model	Output Current	Model
0-6V	0-33A	ZUP6-33	0-66A	ZUP6-66	0-132A	ZUP6-132
0-10V	0-20A	ZUP10-20	0-40A	ZUP10-40	0-80A	ZUP10-80
0-20V	0-10A	ZUP20-10	0-20A	ZUP20-20	0-40A	ZUP20-40
0-36V	0-6A	ZUP36-6	0-12A	ZUP36-12	0-24A	ZUP36-24
0-60V	0-3.5A	ZUP60-3.5	0-7A	ZUP60-7	0-14A	ZUP60-14
0-80V	0-2.5A	ZUP80-2.5	0-5A	ZUP80-5	—	—
0-120V	0-1.8A	ZUP120-1.8	0-3.6A	ZUP120-3.6	—	—

ZUP

ZUP Specifications

ITEMS/UNITS			MODEL	ZUP6-33	ZUP6-66	ZUP6-132	ZUP10-20	ZUP10-40	ZUP10-80	ZUP20-10
OUTPUT VOLTAGE (*1)			V	0-6			0-10			
OUTPUT CURRENT (*2)			A	0-33	0-66	0-132	0-20	0-40	0-80	0-10
RATED OUTPUT POWER			W	198	396	792	200	400	800	200
CONSTANT VOLTAGE	LOAD REGULATION			0.005%+2mV From No load to Full load, constant input voltage.						
	LINE REGULATION			0.005%+1mV From 85-132VAC or 170-265VAC, constant load.						
	RMS RIPPLE (5Hz-1MHz Bandwidth)		mV	5	5	8	5	5	8	5
	RIPPLE (pk to pk) (20MHz Bandwidth)		mV	50	50	100	50	50	90	50
	RECOVERY TIME (*3)		mS	1			0.5			
	TEMPERATURE COEFFICIENT			30ppm/…C from rated voltage following 30-minute warm-up.						
	TEMPERATURE DRIFT			0.01%+2mV Change in output over 8-hour interval under constant line, load and ambient temp following30-minute warm-up.						
	UP PROGRAMMING RESPONSE TIME (*4)		mS	50	50	60	50	50	60	50
CONSTANT CURRENT	DOWN PROGRAMMING FULL LOAD		mS	50	50	50	50	50	50	50
	RESPONSE TIME NO LOAD		mS	250			350			
	LOAD REGULATION (*5)			0.01%+5mA	0.01%+5mA	0.07%+10mA	0.01%+5mA	0.01%+5mA	0.07%+10mA	0.01%+5mA
	LINE REGULATION (*6)			0.01%+2mA	0.01%+2mA	0.01%+5mA	0.01%+2mA	0.01%+2mA	0.01%+5mA	0.01%+2mA
	RMS RIPPLE (5Hz-1MHz Bandwidth)		mA	50	100	200	25	50	100	15
	TEMPERATURE COEFFICIENT			100ppm/…C from rated current following 30-minute warm-up.						
	TEMPERATURE DRIFT (*8)			0.02%+5mA	0.02%+5mA	0.05%+10mA	0.02%+5mA	0.02%+5mA	0.05%+10mA	0.02%+5mA
	RESOLUTION			Better than 0.028% of rated output voltage						
PROGRAMMING (*9)	VOLTAGE ACCURACY			0.02%+5mV			0.02%+8mV			
	RESOLUTION			Better than 0.03% of rated output current						
	CURRENT ACCURACY			0.4%+40mA						
OVERVOLTAGE PROTECTION (*10)			V	0-7.5			0-13			
HOLD-UP TIME				20mS At 100V/200VAC, rated output voltage and output current.						
DISPLAY	VOLTAGE			3 digits (6v; 20v; 36v; 60v; 80v); 3.5 digits (10v; 120v) accuracy: 0.2% +/- 2 digits.						
	CURRENT			3.5 digits (132A); All others 3 digits, accuracy: 0.5% +/- 3 digits.						
	STATUS			CV/CC, Alarm, Fold, Local/Remote, On/Off.						
OUTPUT PROTECTIONS				Over Voltage, Over Temperature, Foldback.						
INPUT	INPUT VOLTAGE (*11)			85-265Vac Continuous, 47-63Hz						
	INPUT CURRENT (*12)		A	3.0/1.5	5.6/2.7	11.2/5.4	2.9/1.4	5.6/2.7	11.2/5.4	2.9/1.4
	INRUSH CURRENT (100/200V)		A	15/30 (*7)	15	30	15/30 (*7)	15	30	15/30 (*7)
	EFFICIENCY (*12)		%	69/72	74/77	74/77	73/77	79/82	77/81	74/78
	INPUT CURRENT HARMONICS			Complies with EN61000-3-2, Class A						
POWER FACTOR (TYP)				0.99 at 100/200Vac, 100% load.						
ENVIRONMENT	OPERATING TEMPERATURE			0 to 50 …C ; 100% Load.						
	OPERATING HUMIDITY			30-90% RH (No dewdrop).						
	STORAGE TEMPERATURE			-20 to 70 …C						
	STORAGE HUMIDITY			10 - 95% RH (No dewdrop).						
MECHANICAL	VIBRATION			10-55Hz, Amplitude (sweep 1 min) 2G, X, Y, Z, When mounted with mounting screws.						
	SHOCK			Less than 20G						
	WEIGHT		Kg	2.9	3.2	5.8	2.9	3.2	5.8	2.9
	SIZE (W x H x D)		mm	200W and 400W units: 70 x 124 x 350. 800W units: 140 x 124 x 350 (Refer to outline drawing)						
EXTERNAL CONTROL FUNCTIONS	OUTPUT ON/OFF			By TTL Signal or Dry Contact (Refer to instruction manual).						
	OUTPUT GOOD			Open collector (Refer to instruction manual).						
	OUTPUT VOLTAGE PROGRAMMING			By Voltage (0-4V) or by Resistance (0-4K) (Refer to instruction manual).						
	OUTPUT CURRENT PROGRAMMING			By Voltage (0-4V) or by Resistance (0-4K) (Refer to instruction manual).						
	REMOTE SENSING			Maximum 0.5V drop on each load wire for model up to 60V and 2V for the 80V, 120V models						
APPROVALS	COMMUNICATION INTERFACE			RS232 and RS485 Built-in, IEEE488 Optional.						
	SAFETY STANDARDS			UL3111-1, EN61010-1						
	EMC STANDARDS			EN61326-1, IEC 61326-1, FCC part 15 (class A).						
CONDUCTED EMI				EN55022-B, FCC-B, VCCI-2						
RADIATED EMI				EN55022-A, FCC-A, VCCI-1						
SERIES OPERATION				Up to 2 units (Refer to instruction manual).						
PARALLEL OPERATION				Master - Slave method; up to 5 units (Refer to instruction manual).						
COOLING				Forced air by blower fan (Blower fan is mounted within unit).						
WITHSTAND VOLTAGE				Input - Chassis...2.0kVAC 1 min, Input - Output...3.0kVac 1 min, Output - GND...500VAC 1 min.						
ISOLATION RESISTANCE				More than 100MOhm at 25 …C and 70% R.H.						

(*1) Minimum voltage is guaranteed to maximum 0.2% of the rated output voltage.

(*2) Minimum current is guaranteed to maximum 0.4% of the rated output current.

(*3) Time for recovery to within +/-50mV against current change of 50% to 100%.

(*4) From zero volts to full scale , resistive load and current setting at maximum.

(*5) From no load to full load , constant input voltage.
(Measure with JEITA RC-9131 probe.)

(*6) From 85~132Vac or 170~265Vac constant load.

(*7) At cold start Ta=25 °C.

(*8) Change in output over 8 hour interval constant line, load and ambient temperature following 30-minutes warm-up.

(*9) Given for control of the output via the serial communication or via front panel controls.

(*10) Inverter shut down method, manual reset (OVP will shut down output)


(*11) For cases where conformance to various safety specs. (UL, IEC, etc.) are required, to be described as 100-240VAC (50/60Hz) on name plate.

(*12) At 100V/200V and Maximum Output Power.
- When forced air cooling, refer to derating curve.


ZUP

Outline Drawing

[ZUP 200W/400W Units]

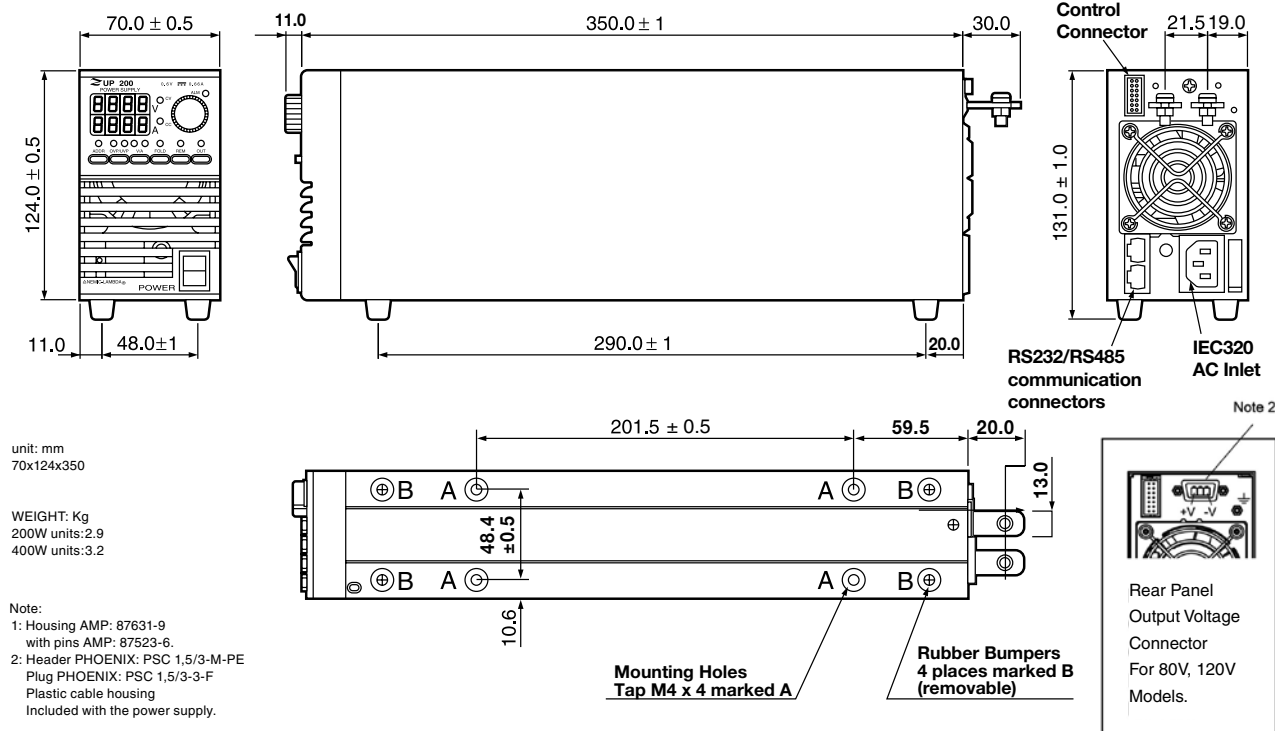

[ZUP 800W Unit]

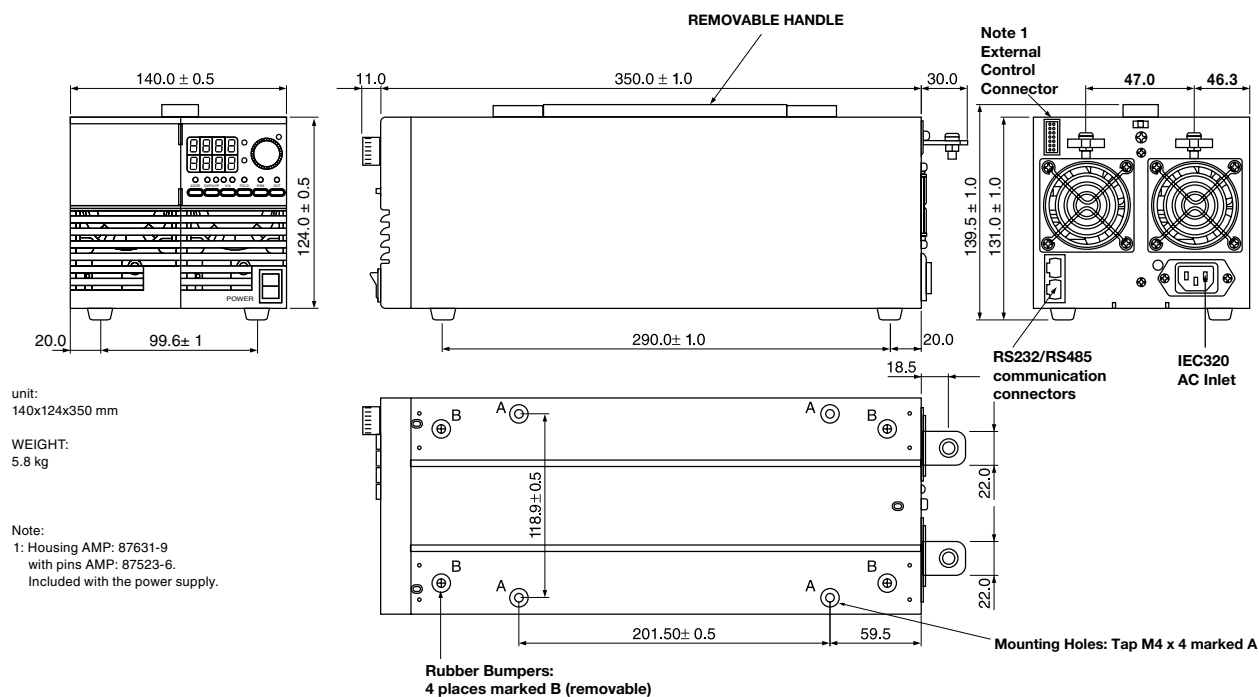

Accessories / optional items (refer to the attached diagram for appearance)

Accessories

1. AC Cord Sets

Three optional cords are possible according to order:

Region	AC Cord	Power Supply Connector	Wall Plug	P/N
				ZUP / J
Europe	10A / 250Vac L =2m	IEC320-C13	INT'L 7 / VII	ZUP / E
				ZUP / O



North America



Europe





SI-32 Standard



2. Communication Cable

RS232/RS485 cable is used to connect the power supply to the PC controller


Mode	PC connector	Communication cable	Power Supply Connector	P/N
RS232	DB-9	Shield Ground , L=1m	EIA / TIA-568A (RJ-45)	ZUP/NC401
RS232	DB-25	Shield Ground , L=1m	EIA / TIA-568A (RJ-45)	ZUP/NC403



DB-25 (female connector)



DB-9 (female connector)





EIA/TIA (RJ-45)

3. ZUP serial link cable

Used to chain Power Supply to Power Supply from a serial communication bus

Mode	Communication cable	Power Supply Connector Remote IN / OUT	P/N
RS485	Shield Ground , L = 50cm	EIA / TIA-568A (RJ-45)	ZUP / W




ZUP

Options (200W, 400W, 800W Models)

1. FRONT PANEL OUTPUT JACKS


P/N: ZUP / L



Outline Drawing: Physical Dimensions in mm.

ZUP 200W/400W Units: 70x153x405.9

ZUP 800W Units: 140x153x405.9


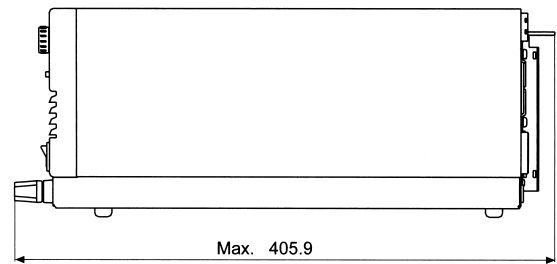


Up to 20A output current via front panel jacks.

2. ZUP ASSEMBLIES

Dual Output Packing 200W/400W models

P/N: ZUP/NL200




3. 19" RACK MOUNTED ATE AND OEM UP TO 2.4 KW

Up to six power units can be assembled into a 19 , 3U rack, kit P/N NL100.

In cases where the entire rack is not occupied with power units, NL101 blank panels can be installed.

P/N: ZUP/NL100

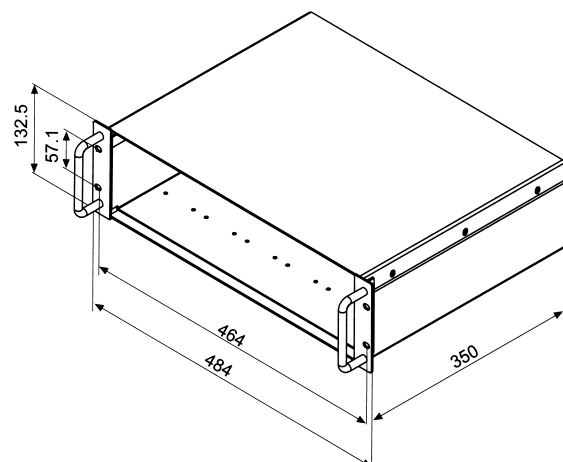


ZUP

Application examples

ZUP Configurations

BENCH TOP POWER SUPPLY

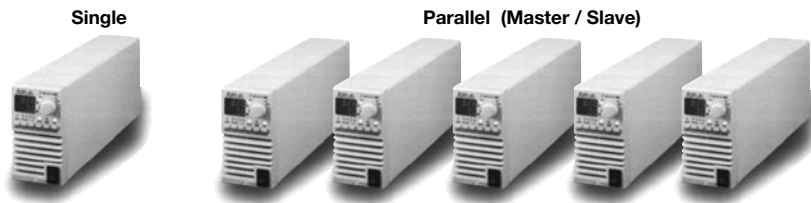


PARALLEL OPERATION

Master - Slave method: Active current sharing up to 5 units.


REMOTE PROGRAMMING VIA RS232

Up to 31 ZUP units can be controlled via RS232 interface.

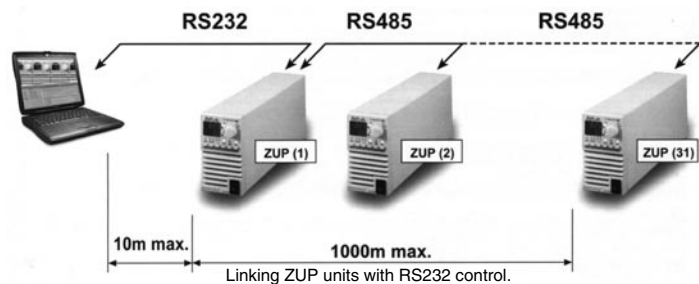

REMOTE PROGRAMMING VIA RS485

Up to 31 ZUP units can be controlled via RS485 interface.
For operation environments that require high noise immunity or long distance communication, it is recommended to use the built-in RS485 interface.

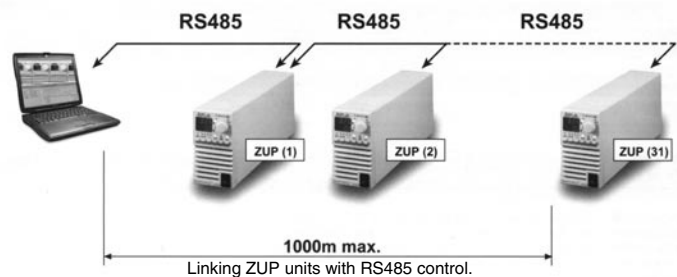


Remote Programming Via GPIB.

GPIB⇔RS485 CONTROLLER

The GP485 is a high performance serial to GPIB Interface.
It enables a ZUP series with RS485 port to be a Talker, Listener, or controller on the GPIB

- * Controls up to 31 ZUP units through a single GPIB address.
- * Conforms to all versions of the IEEE488 standard, including IEEE488.2.
- * 19 racking possibility.
- * Application software - LabView, LabWindows.

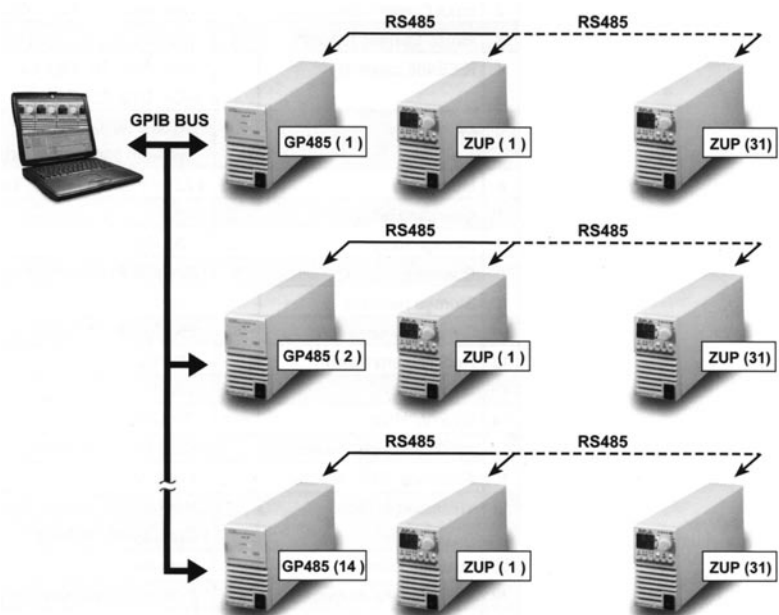


Rack Mounted ATE and OEM up to 2.4KW

Six units can be assembled into 19-inch rack / 3U high
to meet your configuration requirements

Power Modules Table

Module Type	200W	400W	800W
0 ~ 6V	33A	66A	132A
0 ~ 10V	20A	40A	80A
0 ~ 20V	10A	20A	40A
0 ~ 36V	6A	12A	24A
0 ~ 60V	3.5A	7A	14A
0 ~ 80V	2.5A	5A	
0 ~ 120V	1.8A	3.6A	
19"rack width	1 / 6 width	1 / 6 width	2 / 6 width

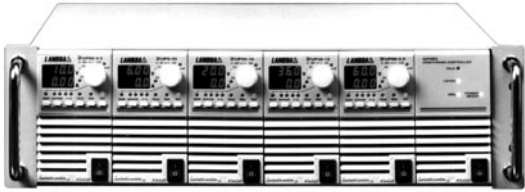

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[ZUP/NC401](#) [ZUP/NC405](#) [ZUP/NC404](#) [ZUP/NC402](#) [ZUP/NC403](#)