

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C2	REVISED PER ECO-11-008467	25APR2011	HMR	CR


RETENTION LATCH
(DISPOSITIVO DI RITENZIONE)

MATING FACE
(LATO DI ACCOPPIAMENTO)


CLAMPING SCREW
(VITE DI SERRAGGIO)

POLARIZATION KEY SLOT
(SEDE PER LINGUETTE DI CODIFICA)


WIRE ENTRY
(INGRESSO CAVO)

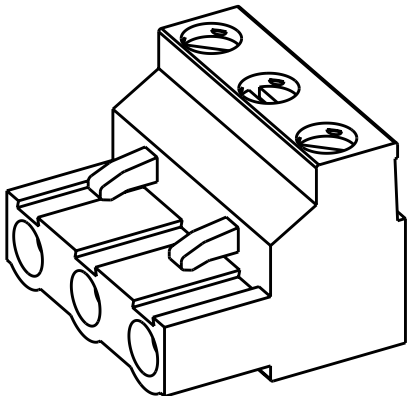

282959-3 AS SHOWN

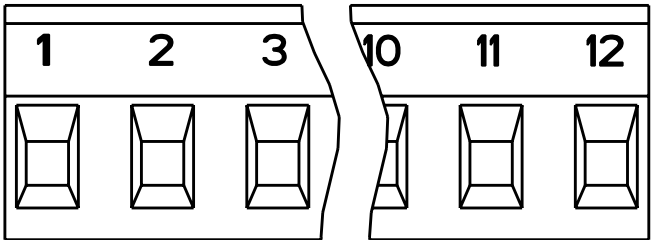

1-282959-5 AS SHOWN




1-282959-6 AS SHOWN

	/	GRAY	20.5	3	1-282959-9
6	AS SHOWN	GREEN	20.5	3	1-282959-6
6	AS SHOWN	GREEN	90.0	12	1-282959-5
7	/	GREEN	73.0	10	1-282959-4
7	/	BLACK	20.5	3	1-282959-3
	/	GREEN	88.0	12	1-282959-2
	/	GREEN	80.5	11	1-282959-1
	/	GREEN	73.0	10	1-282959-0
	/	GREEN	65.5	9	282959-9
	/	GREEN	58.0	8	282959-8
	/	GREEN	50.5	7	282959-7
	/	GREEN	43.0	6	282959-6
	/	GREEN	35.5	5	282959-5
	/	GREEN	28.0	4	282959-4
	/	GREEN	20.5	3	282959-3
	/	GREEN	13.0	2	282959-2
MARKING		COLOUR	DIM.A	N° OF POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±0.2
2 PLC ±0.20
3 PLC ±0.001
4 PLC ±0.0001
ANGLES ±2

FINISH

DWN S. SCHLEGEL 25JUN96

CHK R CANTORE 25JUN96

APVD R CANTORE 25JUN96

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME
TERMINAL BLOCK PLUG,
7.5mm PITCH

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779C-282959

SCALE 2:1 SHEET 1 OF 2 REV C2

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		-	SEE SHEET I SEE SHEET I	-	-	-

1 MATERIALS AND FINISH
HOUSING: PA 6-6, UL 94-V0.
COLOURS: GRAY, RAL 7032.
BLACK.
GREEN.
CLAMP: BRASS, NICKEL PLATED.
DOUBLE SIDE CONTACT SPRING: PHOSPHOR BRONZE, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.

2 WIRE SIZE RANGE
SOLID WIRE: 0,03-2,5mm² (13AWG).
STRANDED WIRE: 0,03-1,5mm² (15AWG).

3 RECOGNIZED UNDER THE COMPONENT PROGRAM OF
UNDERWRITERS LABORATORIES INC. FILE N° E60677.

4 IMQ CERTIFICATE WITH SURVEILLANCE IN
CONFORMITY WITH IEC 998-1/998-2-1.

5 NOT CUMULATIVE TOLERANCE.

6 INK MARKING : BLACK COLOUR
NUMERICAL SEQUENCE : FROM LEFT TO RIGHT,
WIRE ENTRY SIDE

7 NOT YET RELEASED FOR PRODUCTION

1 MATERIALI E FINITURE
BLOCCHETTO: PA 6-6, UL 94-V0.
COLORE: GRIGIO, RAL 7032.
NERO.
VERDE.
MORSETTO: OTTONE NICHELATO.
DOPPIA MOLLA DI CONTATTO: BRONZO FOSFOROSO STAGNATO.
VITE DI SERRAGGIO: M3, OTTONE NICHELATO.

2 CAPACITA' DI CONNESSIONE
CAVO UNIPOLARE: 0,03-2,5mm² (13AWG).
CAVO TREFOLATO: 0,03-1,5mm² (15AWG).



3 PRODOTTO OMOLOGATO DA UNDERWRITERS
LABORATORIES INC. FILE N° E60677.

4 CERTIFICATO CON SORVEGLIANZA IMQ IN CONFORMITA'
AGLI STANDARD IEC 998-1/998-2-1.

5 TOLLERANZA NON CUMULATIVA.

6 MARCHIATURA AD INCHIOSTRO : COLORE NERO
SEQUENZA NUMERICA : DA SINISTRA VERSO DESTRA,
LATO INGRESSO CAVO

7 NON RILASCIATO IN PRODUZIONE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL 25JUN96	<div> TE Connectivity</div>		
		CHK R CANTORE 25JUN96			
		APVD R CANTORE 25JUN96			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL BLOCK PLUG, 7.5mm PITCH	
		0 PLC ±- 1 PLC ±0.2 2 PLC ±0.20 3 PLC ±0.001 4 PLC ±0.0001 ANGLES ±2		PRODUCT SPEC -	
		MATERIAL -		APPLICATION SPEC -	
		FINISH -		WEIGHT -	
		CUSTOMER DRAWING		SCALE 1:1 SHEET 2 OF 2 REV C2	

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-282959

RESTRICTED TO
-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282959-4](#)