


# D15SB10 Thru D15SB100

**High Current Glass Passivated Molding Single-Phase Bridge Rectifier**

**Reverse Voltage 100 to 1000V Forward Current 15.0 A**

## FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM

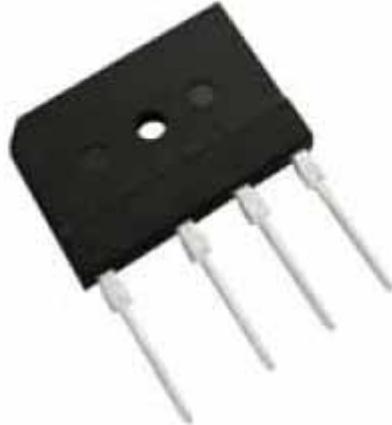

## 1. Maximum & Thermal Characteristics Ratings at 25° ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	D15SB10	D15SB20	D15SB40	D15SB60	D15SB80	D15SB100	Unit
Maximum repetitive voltage	VRRM	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	100	200	400	600	800	1000	V
Maximum DC reverse current TA=25	IR	5						μA
at rated DC blocking voltage TA=125		500						
Maximum average forward rectified output current at (1)	Io	15						A
With heatsink Tc=100° (2)		3.5						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM	250						A
Rating of fusing ( $t < 8.3\text{ms}$ )	$I^2t$	240						$\text{A}^2\text{sec}$
Dielectric strength terminals to case , AC 1 minute Current 1mA	Vdia	2.5						KV
Max instantaneous forward voltage at 7.5A	VF	1.05						V
Operating junction temperature	TJ	-55~150						
Maximum thermal on P.C.B. without heat-sink	R <sub>θJA</sub>	22						°W
resistance per leg on Al plate heat-sink	R <sub>θJC</sub>	1.5						
Storage temperature	Tstg	-55~150						
Mounting torque	Tor	Rating Torque : 0.8 ( Suggests 0.45~0.65 )						N.m

Notes:

(1) Unit case mounted on aluminum plate heatsink

(2) Units mounted on P.C.B. without heatsink

# D15SB10 Thru D15SB100

## 2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 Derating Curve

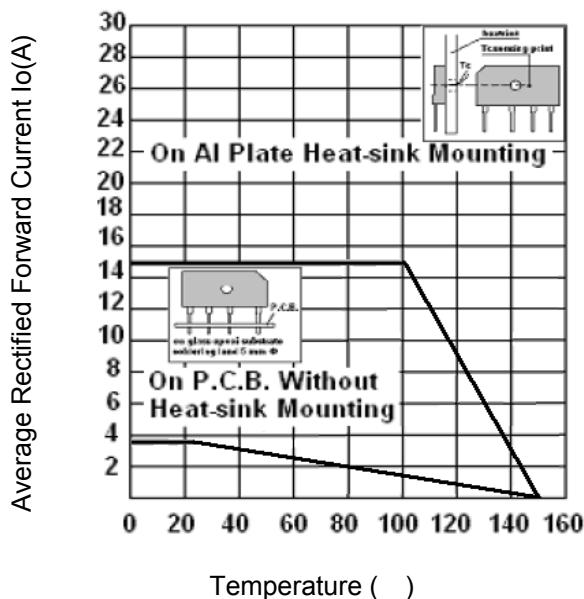


Fig.2 Typical Reverse Characteristics

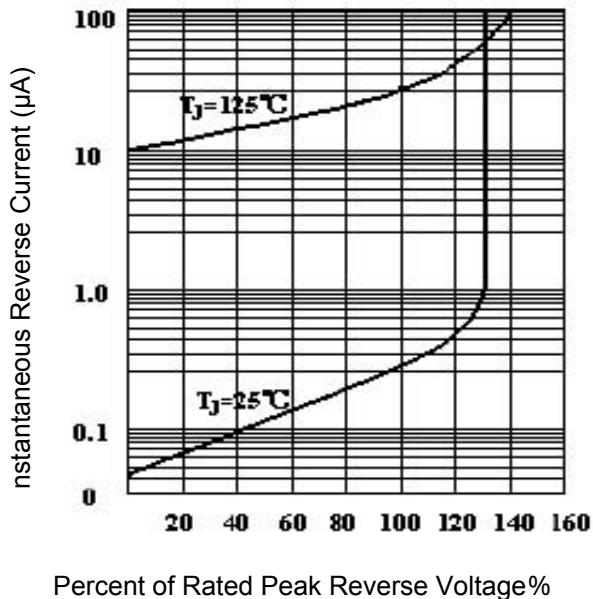


Fig.3 Forward Voltage



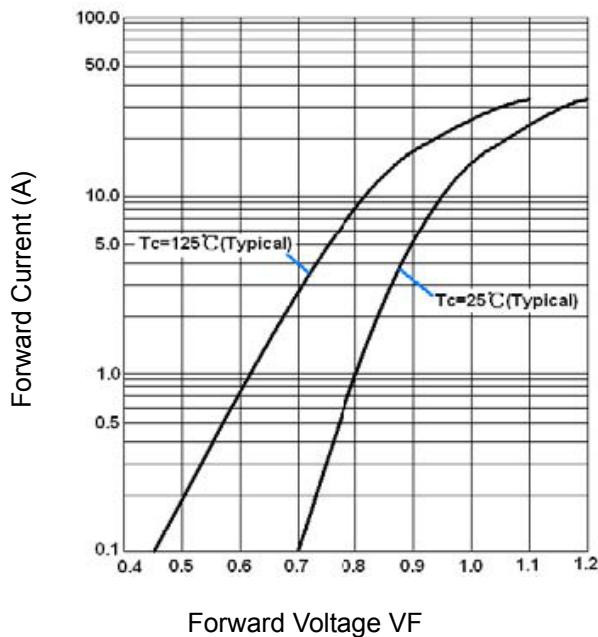


Fig.4 Peak Surge Forward Capability

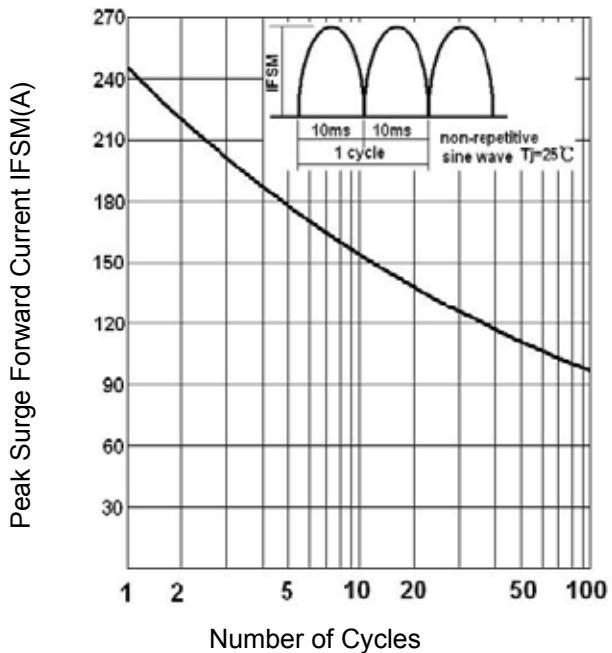

# D15SB10 Thru D15SB100


## 3. Marking Identification

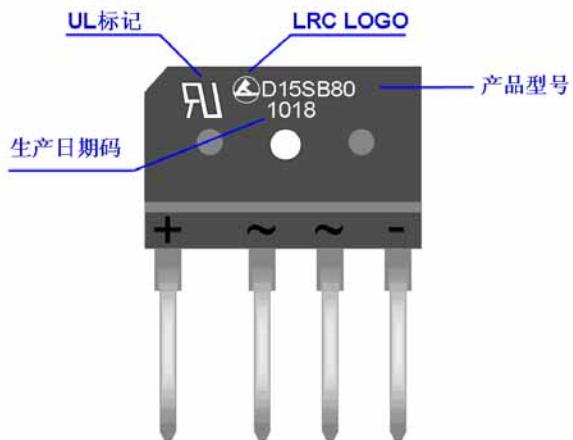

### Note :

生产日期码包含4位数字，例如“1010”，前两个数字“10”表示为2010年，另外二个数字“18”是指第18周，即表示该产品为2010年18周生产。

型号 : **D** **15** **SB** **80**

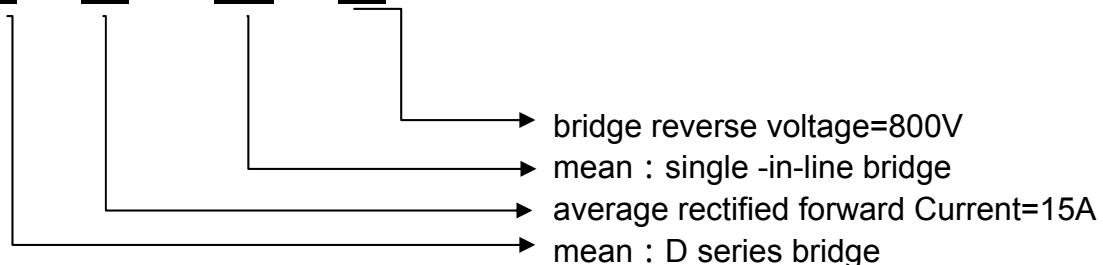

## 4. Dimension

