

SPECIFICATION FOR
CONNECTOR USED FOR FPC WITH 0.5mm CONTACT SPACING
COPING WITH AUTOMATIC MOUNTING & SMT
SFV__R-1/2ST_E_HLF


1. SCOPE
- This specification covers the requirements for the connector (SFV__R-1/2ST_E_HLF) with 0.5mm spacing to which the edge of FPC(Flexible Printed Circuit) can be connected by Zero-Insertion-Force method and which copes with automatic mounting and SMT.
2. APPLICABLE STANDARDS
- JIS C 5402

Method for Test of Connectors for Electronic Equipment
- JIS C 0806

Packing of Electronic Components on Continuous Tapes
(Surface Mount Components)
- UL – 94

TESTS FOR FLAMMABILITY OF PLASTIC MATERIALS FOR PARTS IN
DEVICES AND APPLIANCES.

3. CATALOG No. STRUCTURE

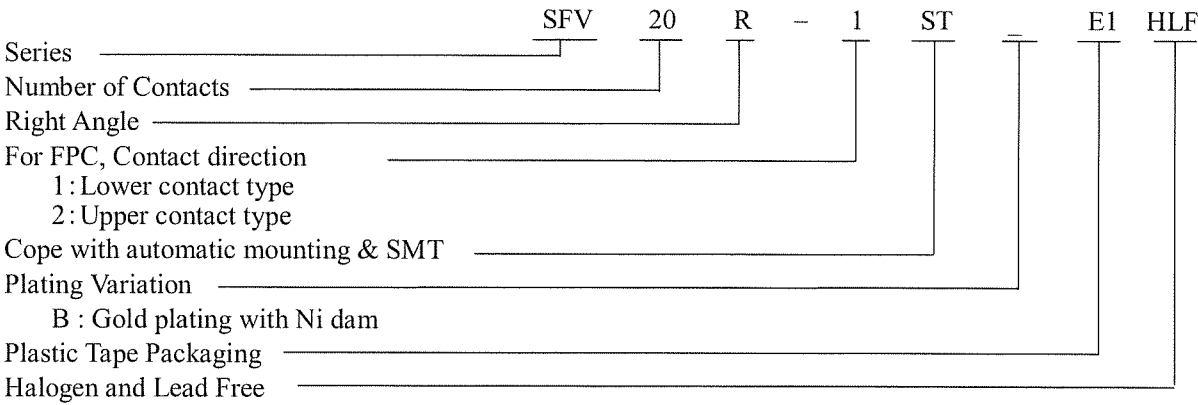

4. CONNECTOR SHAPE, DIMENSIONS AND MATERIALS

See attached drawings.

5. ACCOMMODATED CONDUCTORS (FPC/FFC)

See attached drawings.

6. PACKAGING CONDITION

See attached drawings.


7. RECOMMENDED MOUNTING PATTERN DIMENSIONS

See attached drawings.

8. RATING
- 8-1. Voltage: A.C.50V D.C.50V
- 8-2. Current: A.C.0.5A D.C.0.5A (Refer to the following note.)
- 8-3. Operating Temperature: -55°C ~ +105°C (Including terminal temperature rises)


NOTE

Allowable maximum current for one contact is 0.5A. Total allowable current for a whole connector is the value which is shown in the following figure.

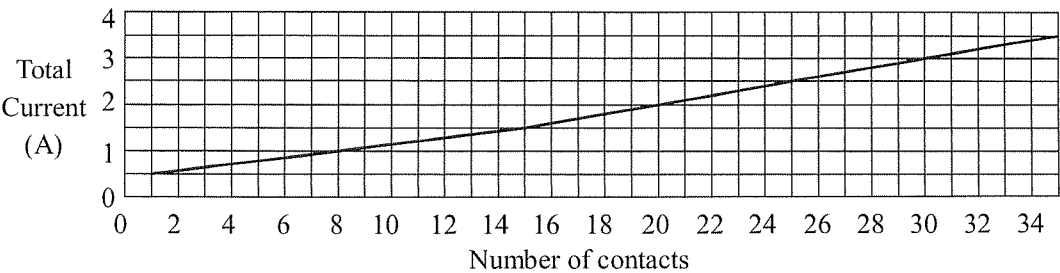

9. PERFORMANCE CHARACTERISTICS

9-1. Electrical Performance

No.	Test Item	Test Method	Requirements
9-1-1	Contact resistance	1) Measure contact resistance between V_1-V_2 by voltage drop method by the following circuit by mating accommodated conductor stipulated in clause 5 after reflow soldering the connector on the P.C.B.  2) Open circuit voltage: Less than 20mV 3) Test current: Less than 20mA	1) Initial value : Less than 30mΩ 2) Contact resistance after the test is in accordance with the value specified in each test item.
9-1-2	Insulation resistance	1) Measure insulation resistance between adjacent contacts in a connector individual. 2) Test voltage: D.C.500V 3) Read value one minute after applying test voltage.	1) More than 100MΩ
9-1-3	Dielectric withstanding voltage	1) For one minute, apply A.C.200V between adjacent contacts in a connector individual. 2) Leakage current: 1mA	1) Free from any short circuit and insulation breakdown.

9-2. Mechanical Performance



No.	Test Item	Test Method	Requirements
9-2-1	Durability (Slider operation)	1) Measure contact resistance before and after the test by the method in clause 9-1-1 by mating the accommodated conductor specified in clause 5. 2) Number of slider open and close: 20 times (Insert and extract the conductor for each opening of the slider.)	1) Initial contact resistance : Less than 30mΩ 2) Contact resistance after the test: Less than 50mΩ 3) Free from any defect such as break etc. on the connector and conductor.
9-2-2	Vibration (Sinusoidal)	JIS C 60068-2-6 (IEC60068-2-6) 1) Frequency range : 10 ~ 500Hz 2) Amplitude: 0.75mm or Acceleration: 100m/s² 3) Sweep rate: 1 octave/minute 4) Test time : 10 cycles	1) During the test, no circuit opening for more than 1μs. 2) Free from any defect such as break, deformation, loosening and falling off etc. on each portion of the connector.

9-3. Environmental Performance

9. Environmental Performance

No.	Test Item	Test Method	Requirements															
9-3-1	Damp heat (Steady state)	JIS C 60068-2-78 (IEC60068-2-78) 1)Measure contact resistance before and after the test by the method in clause 9-1-1 by using the accommodated conductor specified in clause 5. 2)Measure insulation resistance after the test by the method in clause 9-1-2. 3)Temperature: 40°C 4)Humidity: 90 ~ 95%(relative humidity) 5)Period of exposure: 48 hours 6)Expose conductor and connector in mated condition and leave them under normal temperature.(Without insertion and separation)	1)Initial contact resistance : Less than 30mΩ 2)Contact resistance after the test: Less than 50mΩ 3)Insulation resistance after the test : More than 100MΩ															
9-3-2	Salt spray	JIS C 60068-2-11 (IEC60068-2-11) 1)Measure contact resistance before and after the test according to the method in clause 9-1-1 by using accommodated conductor specified in clause 5. 2)Salt solution concentration: 5% by weight 3)Period of exposure: 48 hours 4)Expose conductor and connector in mated condition and leave them under normal temperature after posttreatment. (24 hours)	1)Initial contact resistance : Less than 30mΩ 2)Contact resistance after the test: Less than 50mΩ															
9-3-3	Change of temperature	JIS C 0025 (IEC60068-2-14) 1)Measure contact resistance before and after the test according to the method in clause 9-1-1 by using accommodated conductor in clause 5. 2)One cycle of temperature is as follow and test 5 cycles. <table border="1"><thead><tr><th>Step</th><th>Temp.(°C)</th><th>Time(min.)</th></tr></thead><tbody><tr><td>1</td><td>-55±3</td><td>30</td></tr><tr><td>2</td><td>25±2</td><td>2 ~ 3</td></tr><tr><td>3</td><td>85±2</td><td>30</td></tr><tr><td>4</td><td>25±2</td><td>2 ~ 3</td></tr></tbody></table> 3)Expose conductor and connector in mated condition and leave them under normal temperature.	Step	Temp.(°C)	Time(min.)	1	-55±3	30	2	25±2	2 ~ 3	3	85±2	30	4	25±2	2 ~ 3	1)Initial contact resistance : Less than 30mΩ 2)Contact resistance after the test: Less than 50mΩ 3)Free from any defect such as crack, warping and deformation etc. on each portion the connector.
Step	Temp.(°C)	Time(min.)																
1	-55±3	30																
2	25±2	2 ~ 3																
3	85±2	30																
4	25±2	2 ~ 3																

9-4. Other performance

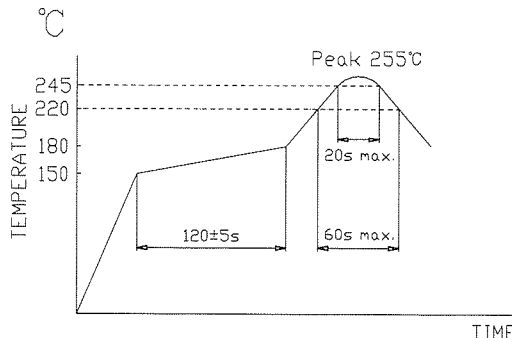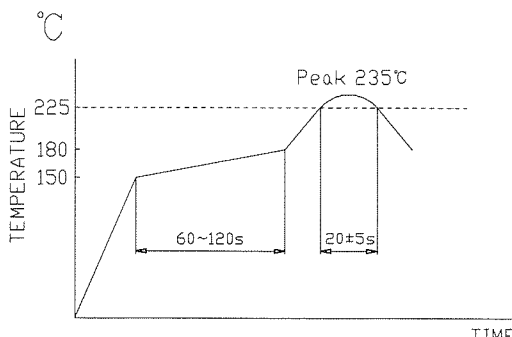No.	Test Item	Test Method	Requirements
9-4-1	Soldering (Resistance to reflow soldering)	JIS C 60068-2-58 (IEC60068-2-58) 1)Solder by setting reflow bath on the following condition. 2)Preheating: 150~180°C, 120±5 s 3)Soldering : 220°C min. 60s max. 4)Peak : 245°C min. 20s max. (Peak 255°C max.) NOTE: Temperature must be measured at contact terminal portion and peak temperature on the upper surface of P.C.B must be less than 260°C. 4)Solder paste to be used is JIS Z 3282 Sn96.5Ag3.0Cu0.5	1)Contact resistance after the test : Less than 50mΩ 2)Insulation resistance after the test : More than 100MΩ 3)No short circuit and insulation breakdown for dielectric withstanding voltage test after this test. 4)Free from any damage on performance and contact performance after soldering.
		<u>Diagram A</u>  Resistance to reflow soldering profile	
9-4-2	Soldering (Solderability) (Reflow)	JIS C 60068-2-58 (IEC60068-2-58) 1)Solder by setting reflow bath on the following condition. 2)Preheating: 150~180°C, 60~120s 3)Soldering : 225°C min., 20±5s (Peak 235°C max.) NOTE: Temperature must be measured at contact terminal portion and peak temperature on the upper surface of P.C.B must be less than 260°C. 4)Solder paste to be used is JIS Z 3282 Sn96.5Ag3.0Cu0.5	1)Actual soldered area must be more than 90% of the dipped area intended to be soldered.
		<u>Diagram B</u>  Solderability profile	
9-4-3	Conductor retention force (Reference)	1)Measure initial retention force after inserted and locked by using accommodated conductor specified in clause 5. *FCI Test FPC : t=0.33mm Gold plating	1)More than 0.25N/contact

10. INDICATION AND PACKAGING

10-1. Indication

- 1) Catalog number and lot number are not be indicated on the connector.
- 2) Catalog number and quantity shall be indicated on the surface of the package box.

10-2. Packaging

- 1) The connector individuals are packed by tapes with specified quantity in accordance with [JIS C 0806 "Packaging of Electronic Components on Continuous Tapes (Surface Mount components)"] and put into package box in accordance with FCI JAPAN packaging specification.

11. REMARKS

- 11-1. Please refer to the "Handling procedures and remarks" before use.
- 11-2. Retention force for accommodated conductor specified in clause 9-4-3 differs due to different thickness, structure and surface treatment of conductor. Therefore, the value of retention force specified in the clause for performance is reference value.
- 11-3. Since this connector can not be used for CIC (Conductor such as silver paste, carbon etc.) as accommodated conductor, please consult us separately.

12. RECOMMENDED REFLOW PROFILE

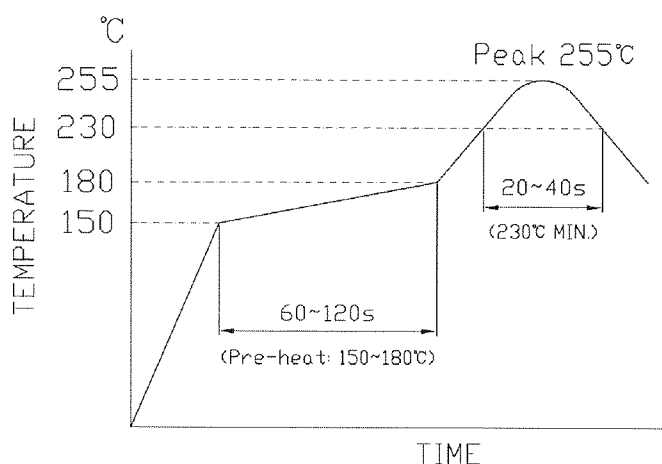


Diagram C. Recommended reflow temperature profile

Note: Please check the reflow soldering condition for your own application beforehand due to different conditions with soldering devices, P.C. Boards, etc.
No moisture treatment before reflow process.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[SFV21R-2STBE1HLF](#) [SFV33R-2STBE1HLF](#) [SFV11R-2STBE1HLF](#) [SFV30R-1STBE1HLF](#) [SFV22R-2STBE1HLF](#)
[SFV8R-1STBE1HLF](#) [SFV31R-2STBE1HLF](#) [SFV10R-2STAE1HLF](#) [SFV27R-2STBE1HLF](#) [SFV7R-1STBE1HLF](#)
[SFV10R-2STBE1HLF](#) [SFV22R-1STBE1HLF](#) [SFV27R-2STAE1HLF](#) [SFV13R-1STBE1HLF](#) [SFV11R-1STBE1HLF](#)
[SFV5R-2STBE1HLF](#) [SFV4R-1STBE1HLF](#) [SFV18R-1STBE1HLF](#) [SFV21R-1STBE1HLF](#) [SFV29R-2STAE1HLF](#)
[SFV4R-2STBE1HLF](#) [SFV26R-2STBE5HLF](#) [SFV32R-2STBE1HLF](#) [SFV26R-1STBE1HLF](#) [SFV9R-1STBE1HLF](#)
[SFV16R-1STBE1HLF](#) [SFV32R-1STBE1HLF](#) [SFV17R-1STBE1HLF](#) [SFV19R-2STBE1HLF](#) [SFV12R-2STBE1HLF](#)
[SFV13R-2STBE1HLF](#) [SFV19R-1STBE1HLF](#) [SFV5R-1STBE1HLF](#) [SFV10R-1STAE1HLF](#) [SFV26R-2STAE1HLF](#)
[SFV10R-1STBE1HLF](#) [SFV15R-2STBE1HLF](#) [SFV25R-1STBE1HLF](#) [SFV15R-1STBE1HLF](#) [SFV35R-1STBE1HLF](#)
[SFV7R-2STBE1HLF](#) [SFV6R-1STBE1HLF](#) [SFV31R-1STBE1HLF](#) [SFV27R-1STBE1HLF](#) [SFV8R-2STBE1HLF](#)
[SFV30R-2STAE1HLF](#) [SFV23R-2STBE1HLF](#) [SFV24R-2STAE1HLF](#) [SFV30R-2STBE1HLF](#) [SFV14R-1STBE1HLF](#)
[SFV6R-2STBE1HLF](#) [SFV4R-2STAE1HLF](#) [SFV28R-2STBE1HLF](#) [SFV25R-2STBE1HLF](#) [SFV18R-2STBE1HLF](#)
[SFV23R-1STBE1HLF](#) [SFV20R-2STBE1HLF](#) [SFV29R-2STBE1HLF](#) [SFV20R-1STBE1HLF](#) [SFV5R-2STAE1HLF](#)
[SFV29R-1STBE1HLF](#) [SFV28R-1STBE1HLF](#) [SFV34R-2STBE1HLF](#) [SFV33R-1STBE1HLF](#) [SFV35R-2STBE1HLF](#)
[SFV26R-1STAE1HLF](#) [SFV24R-1STBE1HLF](#) [SFV32R-1STAE1HLF](#) [SFV22R-2STBE9HLF](#) [SFV26R-2STBE1HLF](#)
[SFV30R-1STAE1HLF](#) [SFV12R-1STBE1HLF](#) [SFV16R-1STAE1HLF](#) [SFV28R-1STAE1HLF](#) [SFV24R-2STBE1HLF](#)
[SFV26R-2STBE9HLF](#) [SFV18R-1STBE9HLF](#) [SFV24R-1STAE1HLF](#) [SFV14R-2STBE1HLF](#) [SFV9R-2STBE1HLF](#)
[SFV17R-2STBE1HLF](#) [SFV4R-2STBE5HLF](#) [SFV16R-2STBE1HLF](#) [SFV34R-1STBE1HLF](#)