


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015445168](#)
Status: **Active**
Overview: C-Grid® Products
Description: 2.54mm Pitch C-Grid® Receptacle, Through Hole, Dual Row, High Profile, Vertical, High-Temperature, 68 Circuits

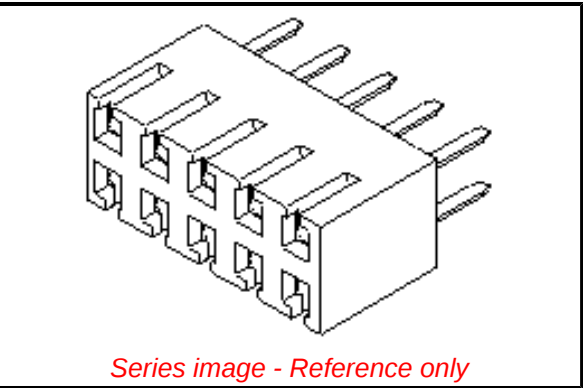

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-70181-001 \(PDF\)](#)
[Product Specification TS-70541-001-001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Receptacles
Series [71850](#)
Application Board-to-Board, Signal
Overview [C-Grid® Products](#)
Product Name C-Grid®
UPC 822350924313

Physical

Circuits (Loaded) 68
Circuits (maximum) 68
Color - Resin Black
Durability (mating cycles max) 50
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part No
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 5.573/g
Number of Rows 2
Orientation Vertical
PC Tail Length 3.05mm
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.57mm
Packaging Type Tray
Pitch - Mating Interface 2.54mm
Pitch - Termination Interface 2.54mm
Plating min - Mating 0.762µm
Plating min - Termination 1.905µm
Polarized to Mating Part No
Polarized to PCB No
Stackable No
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole

Electrical

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS Green Image
ELV Not Relevant
RoHS Phthalates Not Contained

Search Parts in this Series

[71850 Series](#)

Mates With

[8624](#) , [70203](#) , [70246](#) Straight Header,
[70247](#) Right Angle Header, [70287](#) , [70289](#)
 , [70227](#) , [70567](#) , [70280](#) , [70524](#) , [70260](#) ,
[8723](#) , [70568](#) , [8724](#) , [71764](#) , [70229](#) , [70](#)
[216](#) , [71308](#)

Current - Maximum per Contact	2.5A
Grounding to PCB	No
Voltage - Maximum	500V AC (RMS)
Solder Process Data	
Duration at Max. Process Temperature (seconds)	040
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Engineering Number	71850-0225
Reference - Drawing Numbers	
Product Specification	PS-70181-001, TS-70541-001-001
Sales Drawing	SDA-71850-0***

This document was generated on 02/28/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION