

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

14-60-1071

Status:

Active

Overview:

C-Grid® Products

Description:

2.54mm Pitch SL™ Insulation Displacement Connector Assembly, Female, Single Row, Version C, Front Ribs, Wire Size 28 AWG, 3.81µm Tin/Lead (SnPb), 7 Circuits

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Series

Comments

Component Type

Glow-Wire Compliant

Overview

Product Name

Ribbon Cable / Wire Trap Connectors

70400

Terminals Preloaded

Housing

No

C-Grid® Products

SL™

Physical

Circuits (Loaded)

Color - Resin

Durability (mating cycles max)

Entry Angle

Flammability

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

PCB Retention

Packaging Type

Pitch - Mating Interface

Plating min - Mating

Plating min - Termination

Polarized to Mating Part

Stackable

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Wire Insulation Diameter

Wire Size AWG

Wire/Cable Type

7

Black

25

Vertical

94V-0

None

Phosphor Bronze

Tin

Tin

Polyester Alloy

1

None

Tube

2.54mm

3.810µm

1.905µm

Yes

Yes

N/A

-40°C to +105°C

IDT or Pierce

1.35mm max.

28

Discrete Wire, Ribbon Cable

Electrical

Current - Maximum per Contact

Voltage - Maximum

1.2A

250V

Material Info

Reference - Drawing Numbers

Product Specification

PS-70400

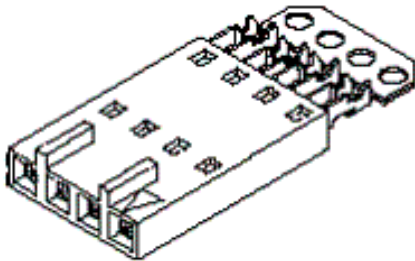


image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
70400Series

Mates With
70544 , 70546 , 70554 , 70556

Use With
7307 Tinned 28AWG, 7767 Topcoat 28AWG, 24241 Tinned 26AWG, 8996 Topcoat 26AWG, 24226 Tinned 24AWG, 8997 Topcoat 24AWG, 24369 High Flex 26AWG, 24389 High Flex 24AWG

Application Tooling | [FAQ](#)
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Hawk™ Semi-Automatic Discrete Wire Terminator for Rebuilt US*	0011201337

Hawk™ Ribbon Cable Terminator without Break-off	<u>0623003000</u>
Hawk™ Semi-Automatic Discrete Wire Terminator	<u>0623003100</u>
Hawk™ Semi-Automatic Discrete Wire Terminator for Rebuilt CE Approved*	<u>0623004900</u>
Hawk™ Flat Flex Cable Terminator with Break-off	<u>0623005200</u>
Hawk™ Ribbon Cable Terminator with Break-off	<u>0623005300</u>
IDT - Semi-automatic - Bench-Top Terminator	<u>0011200949</u>

This document was generated on 04/30/2012
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION