



HONEYWELL
PART NUMBER
YA-2RQ18248-D6

REFERENCE LISTING
YA - 2RQ18248 - D6
ADM9800


REPLACES: X202380 - YA

REV	DOCUMENT	CHANGED BY	CHECK
A	0050758	MBN 03APR09	CMH

SLOT IN HEX NUTS
TO CLEAR ROLLER

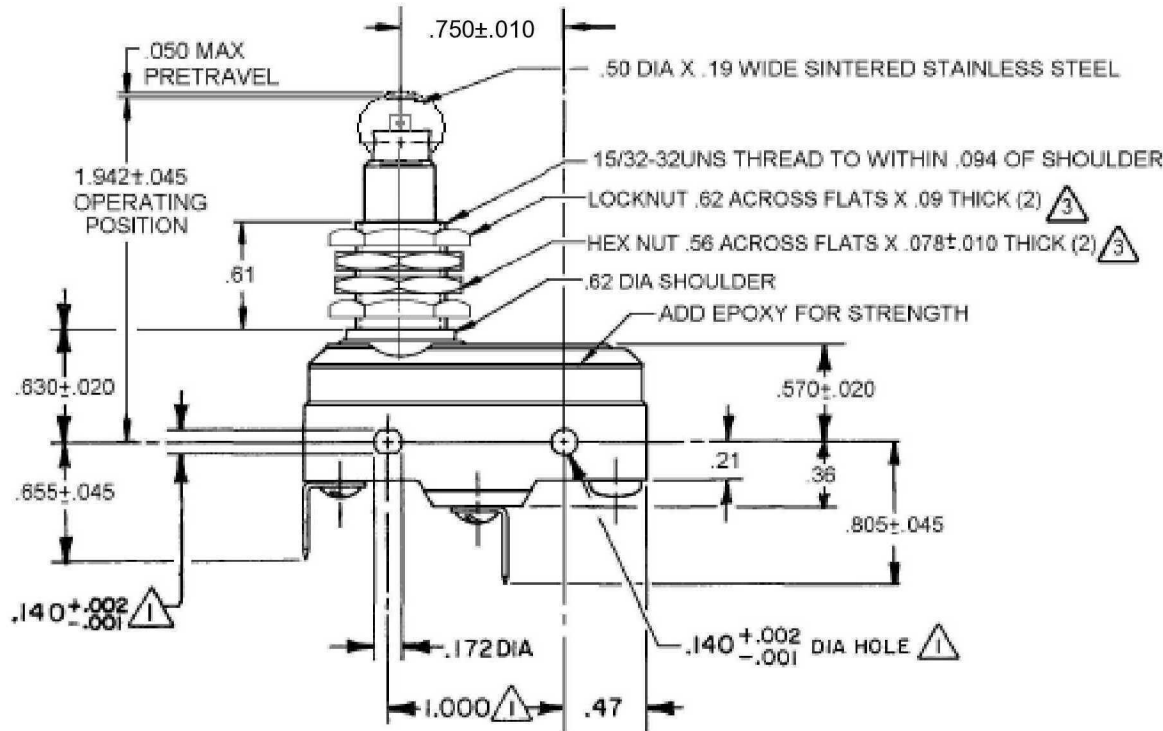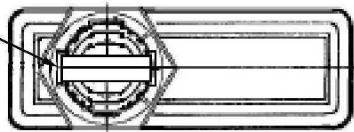

.250 WIDE X .032 THICK QUICK
CONNECT TERMINAL (2)

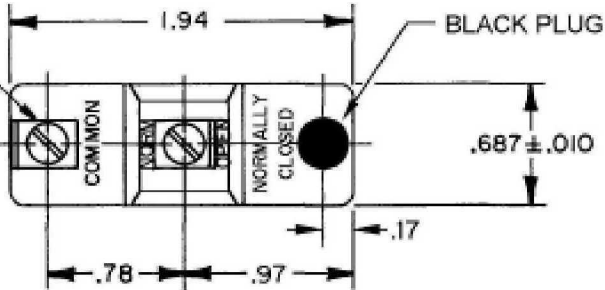

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
 - 2 - SWITCH WILL WITHSTAND TEMPERATURES OF 250° F
 - 3 HARDWARE FURNISHED UNASSEMBLED
 - 4 - WEIGHT: .093 LB

CHARACTERISTICS	ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN	MBN	03APR09	Honeywell					
	CONTACT ARRANGEMENT S P N O			CHECK	DB	03APR09						
OPERATING FORCE — — — — 14-22 OZ	20A-125, 250 OR 480 VAC; 10A-125 VAC "L"		NO PLACES X ± -	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC					
RELEASE FORCE — — — — 9 OZ MIN	1HP-125 VAC; 2HP-250 VAC CODE L23 1/2A-125 VDC; 1/4A-250 VDC		ONE PLACE .X ± .030									
DIFFERENTIAL TRAVEL — — .0020-.0075	L288		TWO PLACE .XX ± .015				INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	CAGE CODE
OVERTRAVEL — — — — .219 MIN	L308 L315		THREE PLACE .XXX ± .005	B	I	-				YA - 2RQ18248 - D6	A	
			ANGLES X ± -	RASTER			SCALE	NONE			SHEET	I OF I
			THIRD ANGLE PROJECTION 