



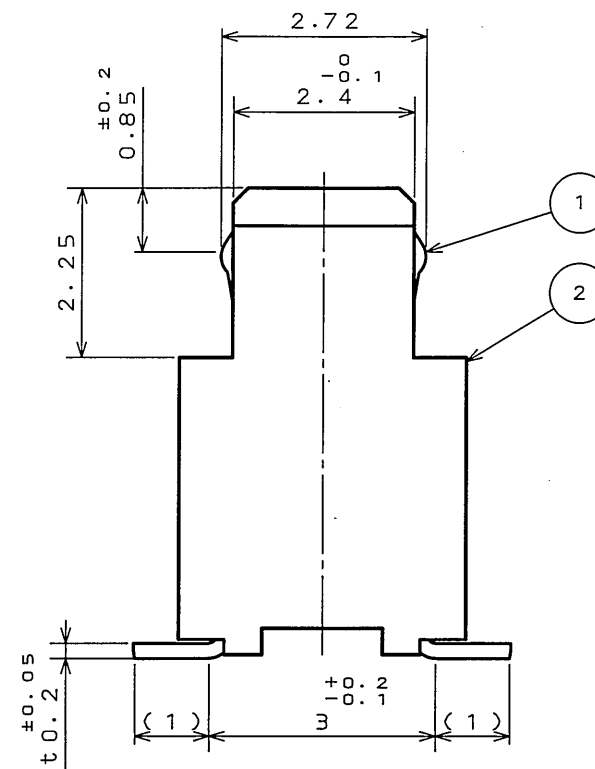

NO. OF CONTACTS	A	B
30	7.0	9.0
40	9.5	11.5
50	12.0	14.0
60	14.5	16.5
64	15.5	17.5
70	17.0	19.0
80	19.5	21.5
100	24.5	26.5
120	29.5	31.5

FINISH	CONTACT AREA	TERMINAL AREA
N 1	GOLD (0.1 μ m MIN) OVER NICKEL	GOLD FLASH OVER NICKEL

注1. 端子の振れ規定は適用仕様書による。

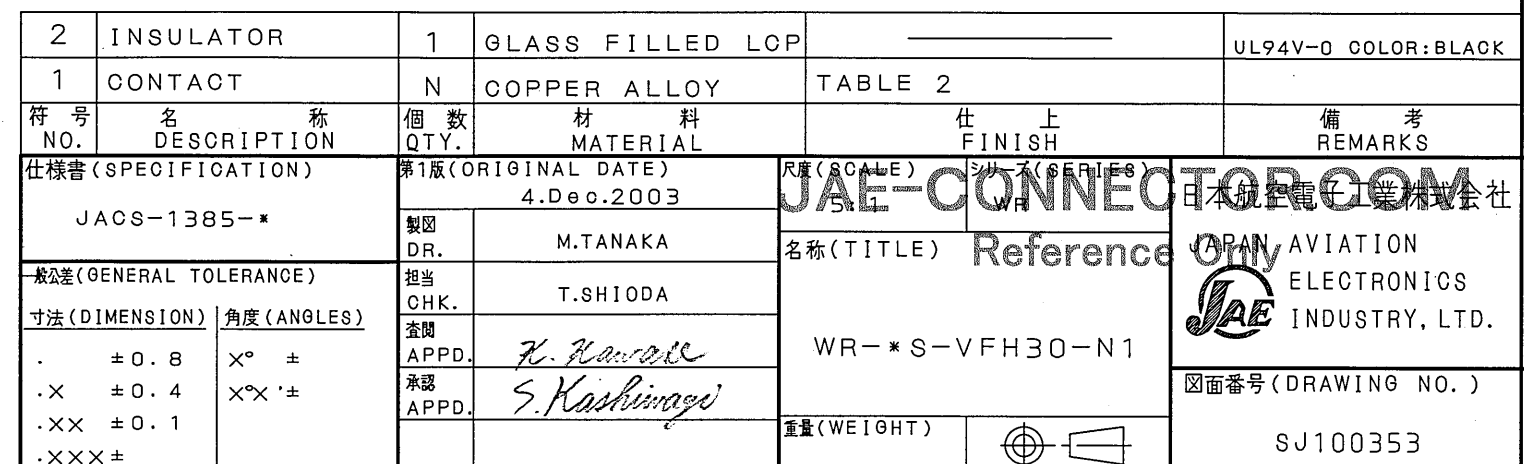

適合基板寸法（参考）

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT (C) 2003, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[WR-100S-VFH30-N1](#) [WR-30SB-VFH30-N1](#) [WR-70S-VFH30-N1](#) [WR-30S-VF-N1](#) [WR-40PB-VF-N1](#) [WR-40SB-](#)
[VFH05-N1](#) [WR-F40PB-VF60-N1](#)