


Metal thin film chip resistors (Ultra-precision)

■ RG series (This series now includes the former RGH series.) AEC-Q200 Compliant

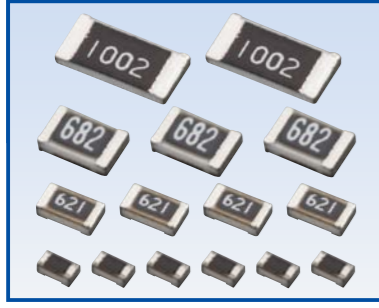

Features

- Ultimate chip resistors: the result of all of our thin film technology expertise including inorganic passivation
- Resistance drift: less than +/-0.1% after 10000 hour accelerated reliability test
- +/-0.02% of resistance tolerance and +/-5ppm/°C of temperature coefficient of resistance
- Excellent tolerance to power surges


Applications

- Any applications that require precision resistors such as automotive electronics, industrial test and measurement equipment, and consumer electronics

Specifications

*Standard stock item: E-24 series with TOR P, Q, and R grades, as well as tolerance D and B grades. Other E-24 grades and E-96 series are made to order

Dimensions



Dimension (inch)	RG1005 (0402) OLD:RGH1005-2B included	RG1608 (0603) OLD:RGH1608-2C included	RG2012 (0805) OLD:RGH2012-2E included	RG3216 (1206)
L	1.00±0.05	1.60±0.20	2.00±0.20	3.20±0.20
W	0.50±0.05	0.80±0.20	1.25±0.20	1.60±0.20
A	0.20±0.10	0.30±0.20	0.40±0.20	0.50±0.25
B	0.25±0.05	0.30±0.20	0.40±0.20	0.50±0.20
T	0.35±0.05	0.40±0.10	0.40±0.10	0.40±0.10

NOTE Obsolete: RGH1005-2B (0402) RGH1608-2C (0603) RGH2012-2E (0805)
Alternative P/N: RG1005 (0402) RG1608 (0603) RG2012 (0805)

Electrical characteristics

Series name	RG1005				RG1608					
Rated power*1	High power application Regular power application High precision	1/8W (OLD: RGH1005-2B) 1/16W 1/32W			1/6W (OLD: RGH1608-2C) 1/10W 1/16W					
E series offered	E-24, E-96									
Resistance range (Ω)	10~46.4	47~97.6	100~2.94k	3k~100k	10~46.4	47~97.6	100~4.99k	5.1k~270k	274k~332k	340k~360k
Resistance tolerance (%)	±0.02% (P)	—	—	—	—	—	—	—	—	—
	±0.05% (W)	—	—	—	—	—	—	—	—	—
	±0.1% (B)	—	—	—	—	—	—	—	—	—
	±0.25% (C)	—	—	—	—	—	—	—	—	—
	±0.5% (D)	—	—	—	—	—	—	—	—	—
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	—	—	—	—	—	—	—
	±10 (N)	—	—	—	—	—	—	—	—	—
	±25 (P)	—	—	—	—	—	—	—	—	—
	±50 (Q)	—	—	—	—	—	—	—	—	—
	±100 (R)	—	—	—	—	—	—	—	—	—
Maximum voltage	75V				100V					
Operating temperature	-55°C~155°C				-55°C~155°C					
Packaging	5,000pcs	CodeT5	CodeT10		CodeT5					

Series name	RG2012				RG3216				
Rated power*1	High power application Regular power application High precision	1/4W (OLD: RGH2012-2E) 1/8W 1/10W			— 1/4W 1/8W				
E series offered	E-24, E-96								
Resistance range (Ω)	10~46.4	47~97.6	100~10k	10.2k~475k	487k~1M	10~46.4	47~97.6	100~33.2k	34k~1M
Resistance tolerance (%)	±0.02% (P)	—	—	—	—	—	—	—	—
	±0.05% (W)	—	—	—	—	—	—	—	—
	±0.1% (B)	—	—	—	—	—	—	—	—
	±0.25% (C)	—	—	—	—	—	—	—	—
	±0.5% (D)	—	—	—	—	—	—	—	—
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	—	—	—	—	—	—
	±10 (N)	—	—	—	—	—	—	—	—
	±25 (P)	—	—	—	—	—	—	—	—
	±50 (Q)	—	—	—	—	—	—	—	—
Maximum voltage	150V				200V				
Operating temperature	-55°C~155°C				-55°C~155°C				
Packaging	5,000pcs				CodeT5				


*1 Depending on customer's reliability requirements, power rating between high power and regular power can be selected.
· Contact us for RG3225 with 1/2W rated power.

Reliability characteristics


Item	Test Method	Specification: drift limits for each power rating						(Typical)
		Low		Regular		High		
		≤47Ω	≥47Ω	≤47Ω	≥47Ω	≤47Ω	≥47Ω	
Short time Overload	Applied voltage : 2.5 times. Test duration: 5 seconds. (When maximum operating voltage: 2 times or less)	±0.10%	±0.05%	±0.10%	±0.05%	—	±0.10%	±(0.01%)
Load Life	Test temperature : 85°C (When high voltage : 70°C). Applied voltage : rated voltage. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.01%)
Moisture load life	Test condition: 85°C, 85% RH. Applied power : 1/10 rated power. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.05%)
Temperature Cycle	Repeat 1000 cycle as follow : -55°C (30 min.)/Room Temp.(2 min.) / +125°C (30min.)/Room Temp.(2min.)	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)
High temperature Exposure	+155°C for 1000 hours with no load	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)

10000 hour reliability test data


Life test

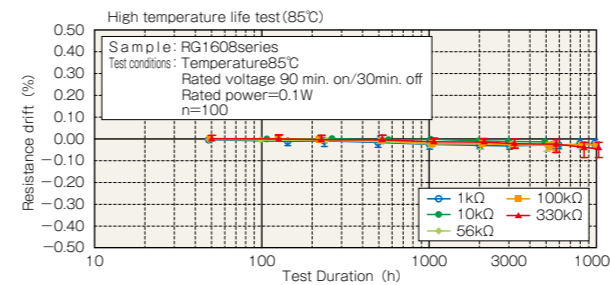


High temperature high humidity bias test

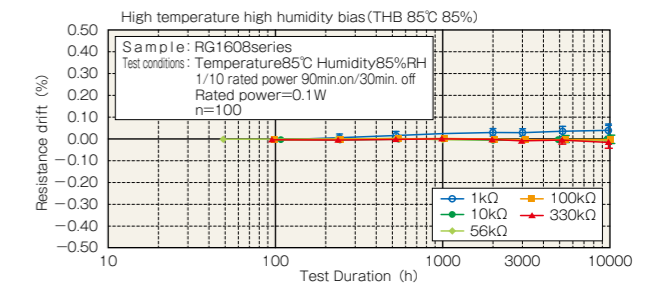


Temperature cycle test

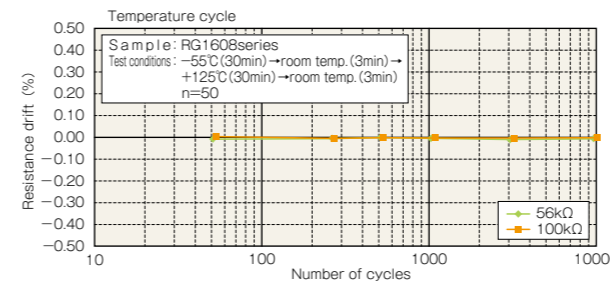


High temperature exposure test

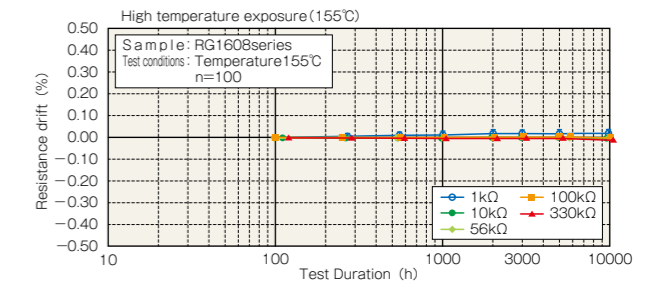


Power derating characteristics

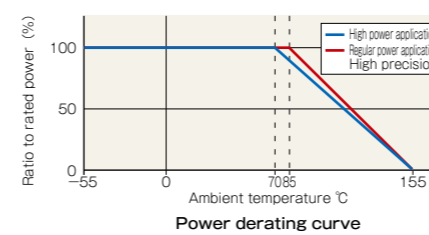

Maximum pulse power limit

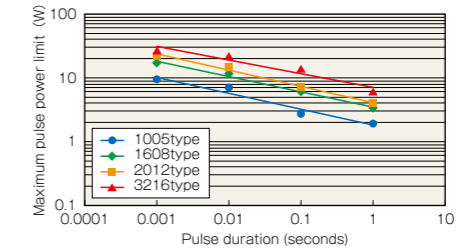

Part numbering system

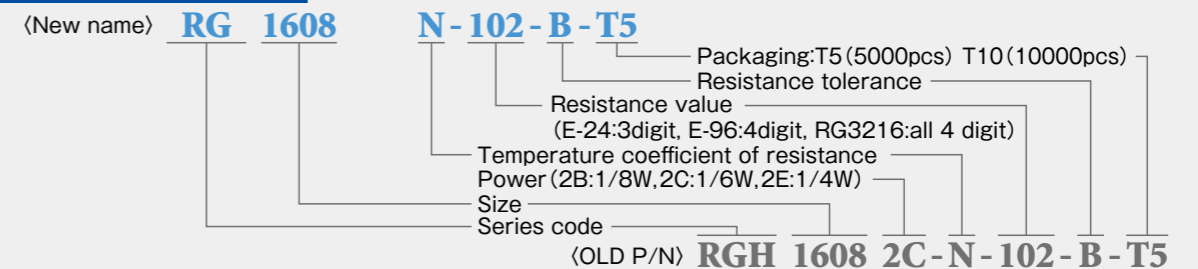

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Susumu:

[RG1005P-60R4-C-T10](#) [RG1005P-60R4-W-T1](#) [RG1005P-6190-B-T1](#) [RG1005P-6190-C-T10](#) [RG1005P-6190-P-T1](#)
[RG1005P-6190-W-T1](#) [RG1005P-6191-B-T1](#) [RG1005P-6191-C-T10](#) [RG1005P-6191-W-T1](#) [RG1005P-6192-B-T1](#)
[RG1005P-6192-C-T10](#) [RG1005P-6192-W-T1](#) [RG1005P-61R9-B-T1](#) [RG1005P-61R9-C-T10](#) [RG1005P-61R9-W-T1](#)
[RG1005P-620-B-T1](#) [RG1005P-620-C-T10](#) [RG1005P-620-W-T1](#) [RG1005P-621-B-T1](#) [RG1005P-621-C-T10](#)
[RG1005P-621-P-T1](#) [RG1005P-621-W-T1](#) [RG1005P-622-B-T1](#) [RG1005P-622-C-T10](#) [RG1005P-622-W-T1](#) [RG1005P-](#)
[623-B-T1](#) [RG1005P-623-C-T10](#) [RG1005P-623-W-T1](#) [RG1005P-6340-B-T1](#) [RG1005P-6340-C-T10](#) [RG1005P-6340-P-](#)
[T1](#) [RG1005P-6340-W-T1](#) [RG1005P-6341-B-T1](#) [RG1005P-6341-C-T10](#) [RG1005P-6341-W-T1](#) [RG1005P-6342-B-T1](#)
[RG1005P-6342-C-T10](#) [RG1005P-6342-W-T1](#) [RG1005P-63R4-B-T1](#) [RG1005P-63R4-C-T10](#) [RG1005P-63R4-W-T1](#)
[RG1005P-6490-B-T1](#) [RG1005P-6490-C-T10](#) [RG1005P-6490-P-T1](#) [RG1005P-6490-W-T1](#) [RG1005P-6491-B-T1](#)
[RG1005P-6491-C-T10](#) [RG1005P-6491-W-T1](#) [RG1005P-6492-B-T1](#) [RG1005P-6492-C-T10](#) [RG1005P-6492-W-T1](#)
[RG1005P-64R9-B-T1](#) [RG1005P-64R9-C-T10](#) [RG1005P-64R9-W-T1](#) [RG1005P-6650-B-T1](#) [RG1005P-6650-C-T10](#)
[RG1005P-6650-P-T1](#) [RG1005P-6650-W-T1](#) [RG1005P-6651-B-T1](#) [RG1005P-6651-C-T10](#) [RG1005P-6651-W-T1](#)
[RG1005P-6652-B-T1](#) [RG1005P-6652-C-T10](#) [RG1005P-6652-W-T1](#) [RG1005P-66R5-B-T1](#) [RG1005P-66R5-C-T10](#)
[RG1005P-66R5-W-T1](#) [RG1005P-680-B-T1](#) [RG1005P-680-C-T10](#) [RG1005P-680-W-T1](#) [RG1005P-6810-B-T1](#)
[RG1005P-6810-C-T10](#) [RG1005P-6810-P-T1](#) [RG1005P-6810-W-T1](#) [RG1005P-6811-B-T1](#) [RG1005P-6811-C-T10](#)
[RG1005P-6811-W-T1](#) [RG1005P-6812-B-T1](#) [RG1005P-6812-C-T10](#) [RG1005P-6812-W-T1](#) [RG1005P-681-B-T1](#)
[RG1005P-681-C-T10](#) [RG1005P-681-P-T1](#) [RG1005P-681-W-T1](#) [RG1005P-682-B-T1](#) [RG1005P-682-C-T10](#)
[RG1005P-682-W-T1](#) [RG1005P-683-B-T1](#) [RG1005P-683-C-T10](#) [RG1005P-683-W-T1](#) [RG1005P-68R1-B-T1](#)
[RG1005P-68R1-C-T10](#) [RG1005P-68R1-W-T1](#) [RG1005P-6980-B-T1](#) [RG1005P-6980-C-T10](#) [RG1005P-6980-P-T1](#)
[RG1005P-6980-W-T1](#) [RG1005P-6981-B-T1](#) [RG1005P-6981-C-T10](#) [RG1005P-6981-W-T1](#)