

Features

Regulated Converters

- 10W DIP24 Package
- 2KVDC and 3kVDC Isolation Options
- 2:1 and 4:1 Versions
- Continuous Short Circuit Protection (power limiting)
- Synchronous Rectification on 3.3, 5V outputs
- Full SMD internal design
- Through Hole or SMD Pinning Options
- Remote Control Pin
- Efficiency to 87%

Description

The REC10-xxxxSRW/DRW-series offer single and dual regulated outputs in a DIP24 package with 2kV or 3kV isolation options and are suitable for higher power industrial or medical applications. Remote on/off control is standard and SMD pinning is offered with the /SMD option. The converters can deliver 150% rated power for short periods of time to cope with applications with large capacitive loads or high start up currents.

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max. Cap. Load
REC10-xx3.3SRW/H*/A/M	9-18, 18-36, 36-75	3.3	2000	84-85	2200µF
REC10-xx05SRW/H*/A/M	9-18, 18-36, 36-75	5	2000	86-87	2200µF
REC10-xx12SRW/H*/A/M	9-18, 18-36, 36-75	12	833	85-86	470µF
REC10-xx15SRW/H*/A/M	9-18, 18-36, 36-75	15	667	85-86	220µF
REC10-xx05DRW/H*/A/M	9-18, 18-36, 36-75	±5	±1000	84	±1000µF
REC10-xx12DRW/H*/A/M	9-18, 18-36, 36-75	±12	±416	86	±220µF
REC10-xx15DRW/H*/A/M	9-18, 18-36, 36-75	±15	±333	86	±100µF
REC10-xx3.3SRWZ/H*/A/M	9-36, 18-75	3.3	2000	84	2200µF
REC10-xx05SRWZ/H*/A/M	9-36, 18-75	5	2000	86	2200µF
REC10-xx12SRWZ/H*/A/M	9-36, 18-75	12	833	85	470µF
REC10-xx15SRWZ/H*/A/M	9-36, 18-75	15	667	85	220µF
REC10-xx05DRWZ/H*/A/M	9-36, 18-75	±5	±1000	83	±1000µF
REC10-xx12DRWZ/H*/A/M	9-36, 18-75	±12	±416	85	±220µF
REC10-xx15DRWZ/H*/A/M	9-36, 18-75	±15	±333	85	±100µF

* Standard is /H2 for 2kVDC isolation, use /H3 for 3kVDC Isolation (not SMD)
* add suffix "/X2" for pinning options, see next page.
* add suffix "/SMD" for SMD package, e.g.
REC10-2405SRW/H2/A/M/SMD

	2:1	4:1
	xx = 9-18Vin = 12,	xx = 9-36Vin = 24,
	xx = 18-36Vin = 24,	xx = 18-75Vin = 48
	xx = 36-75Vin = 48	

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Input Voltage Range	2:1 & 4:1
Input Filter	PI Network
Output Voltage Accuracy	±1.5% max.
Line Voltage Regulation (V_L to V_H at full load)	±0.5% max.
Load Voltage Regulation (25% to 100% full load)	Single ±0.5% max. Dual ±1.2% max.
Cross Regulation (100%: 25% to 100% full load)	±5% max.
Output Ripple and Noise (with 100n output capacitor and 20MHz BW)	100mVp-p max.
Start-up time	300ms typ.
Operating Frequency (Full Load)	400kHz typ.
Efficiency at Full Load	see Selection Guide
Minimum Load	0%

continued on next page

ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM

10 Watt DIP24 & SMD Single & Dual Output



EN-60950-1 Certified
EN-60601-1 Certified
UL-60950-1 Certified

REC10

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Refer to Application Notes

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)



Input Surge Voltage (100ms max.)		12V Input	36VDC
		24V Input	50VDC
		48V Input	100VDC
Isolation Voltage	H2-Suffix and SMD	(tested for 1 second)	2000VDC
		(rated for 1 minute**)	1000VAC / 60Hz
	H3-Suffix	(tested for 1 second)	3000VDC
		(rated for 1 minute**)	1500VAC / 60Hz
Isolation Capacitance			1200pF typ.
Isolation Resistance			1 GΩ min.
Overload Protection			150% typ.
Short Circuit Protection			Continuous, Auto Restart
Operating Temperature Range (free air convection)	4:1	-40°C to +71°C (see Graph)	
	2:1	-40°C to +81°C (see Graph)	
Remote On/Off	DC/DC ON	Open or 3.5V<Vr<12V	
	DC/DC OFF	Short or 0V<Vr<1.2V	
Storage Temperature Range			-55°C to +105°C
Temperature Coefficient			±0.05% max.
Relative Humidity			95% RH
Case Material			Nickel Plated Metal with Non-Conductive Base
Thermal Impedance		Natural convection	15°C/W
Maximum Case Temperature			100°C
Vibration		10-55Hz, 2G, 30mins along X,Y & Z	
Package Weight			18g
Packing Quantity			15 pcs per Tube

MTBF (+25°C) (+71°C)	Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	1000 x 10 ³ hours
		using MIL-HDBK 217F	>250 x 10 ³ hours

Certifications



EN General Safety	Report: SPCLVD1211033-2	EN60950-1:2006 + A12:2011
UL General Safety	Report: E224736	UL 60950-1 1st Ed.
		C22.2 No. 60950-1-03
EN Medical Safety	Report: MDD12060585 + RM1206085	IEC/EN 60601-1 3rd Edition
		Medical Report + ISO14971 Risk Assessment

Derating-Graph (Ambient Temperature)

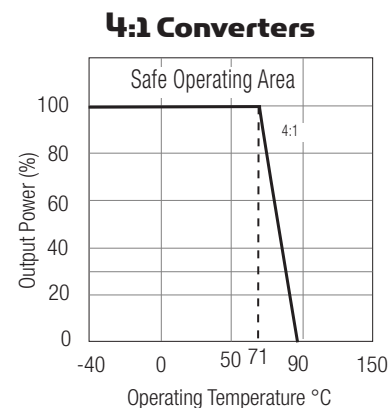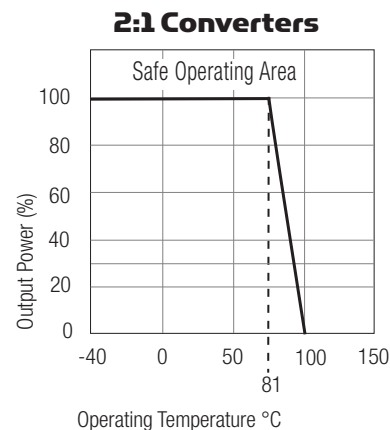

Typical Characteristics




REC10-1205SRW/H2/A/M (/SMD) REC10-1212SRW/H2/A/M (/SMD)

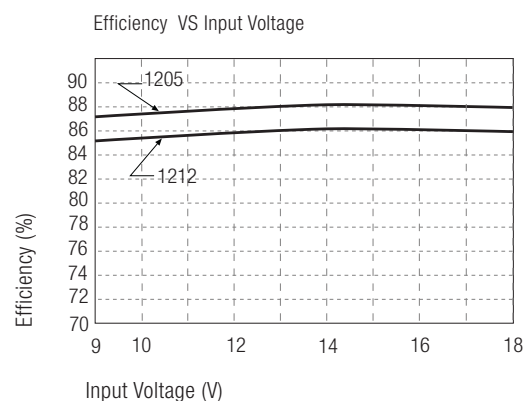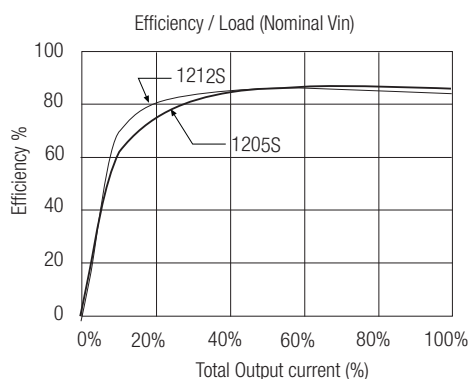


Note: Refer to Application Notes for EMC Class B Filter suggestion

Package Style and Pinning (mm)

24 PIN DIP Package - Available with /H2 and /H3 Options

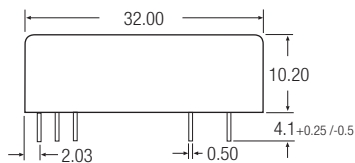

Recommended Footprint Details



Pin Connections DIP24



Pin #	Single	Single/X2	Dual
1	CTRL	No Pin	CTRL
2	-Vin	-Vin	-Vin
3	-Vin	-Vin	-Vin
9	NC	No Pin	Com
11	NC	NC	-Vout
14	+Vout	+Vout	+Vout
16	-Vout	-Vout	Com
22	+Vin	+Vin	+Vin
23	+Vin	+Vin	+Vin

NC = No Connection



XX.X ± 0.5 mm

XX.XX ± 0.25 mm

24 PIN SMD Package- Only available with /H2 Option



Recommended Footprint Details

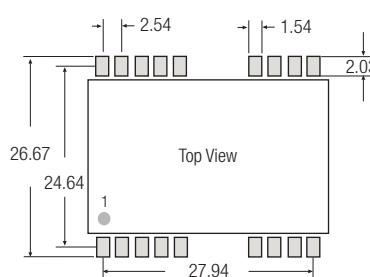

Pin Connections DIP24 SMD

Pin #	Single	Dual
1	CTRL	CTRL
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Com
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
22	+Vin	+Vin
23	+Vin	+Vin
4,5,10,12	NC	
13,15,20,21,24	NC	

NC = No Connection

XX.X ± 0.5 mm

XX.XX ± 0.25 mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[REC10-1205DRW/H2/A/M](#) [REC10-1205DRW/H2/A/M/SMD](#) [REC10-1205DRW/H2/A/M/SMD-R](#) [REC10-1205DRW/H3/A/M](#) [REC10-1205SRW/H2/A/M](#) [REC10-1205SRW/H2/A/M/SMD](#) [REC10-1205SRW/H2/A/M/SMD-R](#) [REC10-1212DRW/H2/A/M](#) [REC10-1212DRW/H2/A/M/SMD](#) [REC10-1212DRW/H2/A/M/SMD-R](#) [REC10-1212DRW/H3/A/M](#) [REC10-1212SRW/H2/A/M](#) [REC10-1212SRW/H2/A/M/SMD](#) [REC10-1212SRW/H2/A/M/SMD-R](#) [REC10-1212SRW/H3/A/M](#) [REC10-1215DRW/H2/A/M](#) [REC10-1215DRW/H2/A/M/SMD](#) [REC10-1215DRW/H2/A/M/SMD-R](#) [REC10-1215DRW/H3/A/M](#) [REC10-1215SRW/H2/A/M](#) [REC10-1215SRW/H2/A/M/SMD](#) [REC10-1215SRW/H2/A/M/SMD-R](#) [REC10-1215SRW/H3/A/M](#) [REC10-123.3SRW/H2/A/M](#) [REC10-123.3SRW/H2/A/M/SMD](#) [REC10-123.3SRW/H2/A/M/SMD-R](#) [REC10-123.3SRW/H3/A/M](#) [REC10-2405DRW/H2/A/M](#) [REC10-2405DRW/H2/A/M/SMD](#) [REC10-2405DRW/H2/A/M/SMD-R](#) [REC10-2405DRW/H3/A/M](#) [REC10-2405DRWZ/H2/A/M](#) [REC10-2405DRWZ/H2/A/M/SMD](#) [REC10-2405DRWZ/H2/A/M/SMD-R](#) [REC10-2405DRWZ/H3/A/M](#) [REC10-2405SRW/H2/A/M](#) [REC10-2405SRW/H2/A/M/SMD](#) [REC10-2405SRW/H2/A/M/SMD-R](#) [REC10-2405SRW/H3/A/M](#) [REC10-2405SRWZ/H2/A/M](#) [REC10-2405SRWZ/H2/A/M/SMD](#) [REC10-2405SRWZ/H2/A/M/SMD-R](#) [REC10-2412DRW/H2/A/M](#) [REC10-2412DRW/H2/A/M/SMD](#) [REC10-2412DRW/H2/A/M/SMD-R](#) [REC10-2412DRW/H3/A/M](#) [REC10-2412DRWZ/H2/A/M](#) [REC10-2412DRWZ/H2/A/M/SMD](#) [REC10-2412DRWZ/H2/A/M/SMD-R](#) [REC10-2412SRW/H2/A/M](#) [REC10-2412SRW/H2/A/M/SMD](#) [REC10-2412SRW/H2/A/M/SMD-R](#) [REC10-2412SRW/H3/A/M](#) [REC10-2412SRWZ/H2/A/M](#) [REC10-2412SRWZ/H2/A/M/SMD](#) [REC10-2412SRWZ/H2/A/M/SMD-R](#) [REC10-2415DRW/H2/A/M](#) [REC10-2415DRW/H2/A/M/SMD](#) [REC10-2415DRW/H2/A/M/SMD-R](#) [REC10-2415DRW/H3/A/M](#) [REC10-2415DRWZ/H2/A/M](#) [REC10-2415DRWZ/H2/A/M/SMD](#) [REC10-2415DRWZ/H2/A/M/SMD-R](#) [REC10-2415DRWZ/H3/A/M](#) [REC10-2415SRW/H2/A/M](#) [REC10-2415SRW/H2/A/M/SMD](#) [REC10-2415SRW/H2/A/M/SMD-R](#) [REC10-2415SRW/H3/A/M](#) [REC10-2415SRWZ/H2/A/M](#) [REC10-2415SRWZ/H2/A/M/SMD](#) [REC10-2415SRWZ/H2/A/M/SMD-R](#) [REC10-2415SRWZ/H3/A/M](#) [REC10-243.3SRW/H2/A/M](#) [REC10-243.3SRW/H2/A/M/SMD](#) [REC10-243.3SRW/H2/A/M/SMD-R](#) [REC10-243.3SRW/H3/A/M](#) [REC10-243.3SRWZ/H2/A/M](#) [REC10-243.3SRWZ/H2/A/M/SMD](#) [REC10-243.3SRWZ/H2/A/M/SMD-R](#) [REC10-243.3SRWZ/H3/A/M](#) [REC10-4805DRW/H2/A/M](#) [REC10-4805DRW/H2/A/M/SMD](#) [REC10-4805DRW/H2/A/M/SMD-R](#) [REC10-4805DRW/H3/A/M](#) [REC10-4805DRWZ/H2/A/M](#) [REC10-4805DRWZ/H2/A/M/SMD](#) [REC10-4805DRWZ/H2/A/M/SMD-R](#) [REC10-4805DRWZ/H3/A/M](#) [REC10-4805SRW/H2/A/M](#) [REC10-4805SRW/H2/A/M/SMD](#) [REC10-4805SRW/H2/A/M/SMD-R](#) [REC10-4805SRW/H3/A/M](#) [REC10-4805SRWZ/H2/A/M](#) [REC10-4805SRWZ/H2/A/M/SMD](#) [REC10-4805SRWZ/H2/A/M/SMD-R](#) [REC10-4812DRW/H2/A/M](#) [REC10-4812DRW/H2/A/M/SMD](#) [REC10-4812DRW/H2/A/M/SMD-R](#) [REC10-4812DRW/H3/A/M](#) [REC10-4812DRWZ/H2/A/M](#)