

RDEC71E226K3K1C03B

“ # ” indicates a package specification code.

Recommended

Flow OK

Complies with RoHS


Anti-noise

Deflecting crack

Soldering crack

< List of part numbers with package codes >
RDEC71E226K3K1C03B

Shape

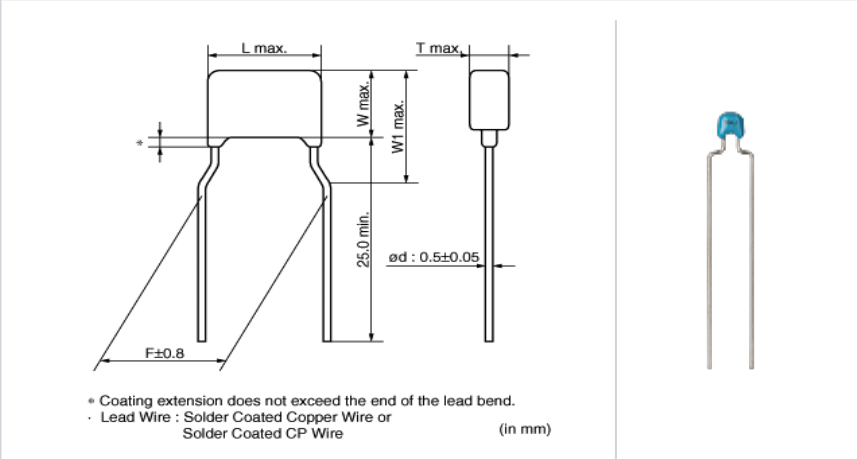

• Coating extension does not exceed the end of the lead bend.
• Lead Wire : Solder Coated Copper Wire or Solder Coated CP Wire (in mm)

L size or outer diameter D (mm)	5.5 mm max.
W size	5.0 mm max.
T size	4.0 mm max.
Lead spacing F	5 ± 0.8mm
Lead diameter d	0.5 ± 0.05mm
W1 size (max.)	7.5mm

Specifications

Capacitance	22μF ± 10%
Rated voltage	25Vdc
Temperature characteristics (complied standard)	X7S(EIA)
Capacitance change rate	± 22%
Temperature range of temperature characteristics	-55 to 125℃
Operating temperature range	-55 to 125℃

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ’ s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.