


Thick Film Surface Mount Chip Resistor, Wraparound, Extremely Low Value (0.01 Ω to 0.976 Ω)



FEATURES

- Extremely low resistance values (0.01 Ω to 0.976 Ω)
- Suitable for current sensing and shunts
- Metal glaze on high quality ceramic
- Protective overglaze
- Lead (Pb)-free solder contacts on Ni barrier layer
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition



RoHS
COMPLIANT
HALOGEN
FREE

STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | POWER RATING $P_{70\text{ }^{\circ}\text{C}}$ W | TEMPERATURE COEFFICIENT ppm/ $^{\circ}\text{C}$ | RESISTANCE RANGE Ω | | E-SERIES |
|-----------------|---|---|------------------------------|----------------|----------|
| | | | $\pm 1.0\%$ | $\pm 5.0\%$ | |
| RCWE0402 | 0.125 | ± 400 | - | 0.033 to 0.05 | 24 |
| | | ± 200 | 0.051 to 0.18 | | |
| | | ± 100 | 0.2 to 0.976 | | |
| RCWE0603 | 0.2 | ± 700 | - | 0.010 to 0.018 | 24 |
| | | ± 400 | 0.02 to 0.03 | | |
| | | ± 200 | 0.033 to 0.1 | | |
| | | ± 100 | 0.11 to 0.976 | | |
| RCWE0805 | 0.25 | ± 400 | - | 0.010 to 0.018 | 24 |
| | | ± 300 | 0.02 to 0.03 | | |
| | | ± 200 | 0.033 to 0.05 | | |
| | | ± 100 | 0.051 to 0.976 | | |
| RCWE1206 | 0.5 | ± 600 | - | 0.010 to 0.018 | 24 |
| | | ± 300 | 0.02 to 0.03 | | |
| | | ± 200 | 0.033 to 0.05 | | |
| | | ± 100 | 0.051 to 0.976 | | |
| RCWE1210 | 1.0 | ± 500 | - | 0.010 to 0.018 | 24 |
| | | ± 300 | 0.02 to 0.03 | | |
| | | ± 200 | 0.033 to 0.05 | | |
| | | ± 100 | 0.051 to 0.976 | | |
| RCWE2010 | 1.0 | ± 600 | - | 0.010 to 0.018 | 24 |
| | | ± 300 | 0.02 to 0.03 | | |
| | | ± 200 | 0.033 to 0.05 | | |
| | | ± 100 | 0.051 to 0.976 | | |
| RCWE2512 | 2.0 | ± 600 | - | 0.010 to 0.018 | 24 |
| | | ± 300 | 0.02 to 0.03 | | |
| | | ± 200 | 0.033 to 0.05 | | |
| | | ± 100 | 0.051 to 0.976 | | |

Notes

- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material
- Part marking: Reference Surface Mount Resistor Marking document number 20020

GLOBAL PART NUMBER INFORMATION

GLOBAL PART NUMBERING EXAMPLE: RCWE060351L0FNEA

R C W E 0 6 0 3 5 1 L 0 F N E A

GLOBAL MODEL

RCWE0402
RCWE0603
RCWE0805
RCWE1206
RCWE1210
RCWE2010
RCWE2512

VALUE

L = m Ω *
R = Decimal
10L0 = 0.01 Ω
R470 = 0.47 Ω
* use "L" for resistance values < 0.1 Ω

TOLERANCE

F = $\pm 1.0\%$
J = $\pm 5.0\%$

TCR

K = ± 100 ppm/ $^{\circ}\text{C}$
N = ± 200 ppm/ $^{\circ}\text{C}$
M = ± 300 ppm/ $^{\circ}\text{C}$
Q = ± 400 ppm/ $^{\circ}\text{C}$
P = ± 500 ppm/ $^{\circ}\text{C}$
T = ± 600 ppm/ $^{\circ}\text{C}$
G = ± 700 ppm/ $^{\circ}\text{C}$



PACKAGING

EA = Lead (Pb)-free, tape/reel


TECHNICAL SPECIFICATIONS

| PARAMETER | UNIT | RCWE0402 | RCWE0603 | RCWE0805 | RCWE1206 | RCWE1210 | RCWE2010 | RCWE2512 |
|--------------------------------------|----------|----------------------|----------|----------|----------|----------|----------|----------|
| Operating Temperature Range | °C | - 55 to + 155 | | | | | | |
| Maximum Operating Voltage | V | $(P \times R)^{1/2}$ | | | | | | |
| Insulation Voltage U_{ins} (1 min) | V | > 75 | > 100 | > 200 | > 300 | > 300 | > 300 | > 300 |
| Insulation Resistance | Ω | > 10^9 | | | | | | |
| Weight/1000 pieces (typical) | g | 0.7 | 3 | 5.5 | 10.5 | 17.5 | 26 | 40.5 |

DIMENSIONS

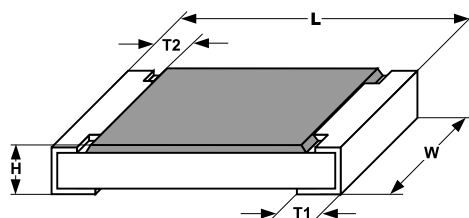

| MODEL | DIMENSIONS (in mm) | | | | | | SOLDER PAD DIMENSIONS (in mm) | | |
|----------|---------------------------|-----------------|-----------------|----------------|----------------|----------------|-------------------------------|-----|-----|
| | RESISTANCE RANGE Ω | L | W | H | T1 | T2 | a | b | l |
| RCWE0402 | 0.033 to 0.976 | 1.03 ± 0.05 | 0.5 ± 0.05 | 0.4 ± 0.1 | 0.3 ± 0.15 | 0.2 ± 0.1 | 0.7 | 0.7 | 0.3 |
| RCWE0603 | 0.01 to 0.03 | 1.6 ± 0.1 | 0.85 ± 0.1 | 0.5 ± 0.1 | 0.5 ± 0.2 | 0.3 ± 0.2 | 0.9 | 1.0 | 0.4 |
| | 0.033 to 0.976 | | | | 0.3 ± 0.2 | | 0.7 | 1.0 | 0.8 |
| RCWE0805 | 0.01 to 0.03 | 2.0 ± 0.15 | 1.3 ± 0.1 | 0.55 ± 0.1 | 0.6 ± 0.2 | 0.35 ± 0.2 | 1.0 | 1.4 | 0.6 |
| | 0.033 to 0.976 | | | | 0.4 ± 0.2 | | 0.8 | 1.4 | 1.0 |
| RCWE1206 | 0.01 to 0.03 | 3.1 ± 0.15 | 1.6 ± 0.15 | 0.6 ± 0.1 | 0.9 ± 0.2 | 0.45 ± 0.2 | 1.3 | 1.8 | 1.0 |
| | 0.033 to 0.05 | | | | 0.8 ± 0.2 | | 1.2 | 1.8 | 1.2 |
| | 0.051 to 0.976 | | | | 0.45 ± 0.2 | | 1.0 | 1.8 | 1.6 |
| RCWE1210 | 0.01 to 0.03 | 3.1 ± 0.2 | 2.5 ± 0.2 | 0.6 ± 0.1 | 0.8 ± 0.2 | 0.4 ± 0.2 | 1.3 | 2.6 | 1.1 |
| | 0.033 to 0.976 | | | | 0.4 ± 0.2 | | 0.9 | 2.6 | 2.0 |
| RCWE2010 | 0.01 to 0.03 | 5.0 ± 0.2 | 2.5 ± 0.15 | 0.6 ± 0.1 | 1.6 ± 0.3 | 0.6 ± 0.2 | 2.3 | 3.0 | 1.4 |
| | 0.033 to 0.05 | | | | 0.7 ± 0.3 | | 1.4 | 3.0 | 3.2 |
| | 0.051 to 0.976 | | | | 0.7 ± 0.3 | | 1.4 | 3.0 | 3.2 |
| RCWE2512 | 0.01 to 0.03 | 6.3 ± 0.2 | 3.15 ± 0.15 | 0.6 ± 0.1 | 2.0 ± 0.3 | 0.6 ± 0.2 | 2.8 | 3.6 | 1.4 |
| | 0.033 to 0.05 | | | | 0.8 ± 0.3 | | 1.6 | 3.6 | 3.8 |
| | 0.051 to 0.976 | | | | 0.8 ± 0.3 | | 1.6 | 3.6 | 3.8 |

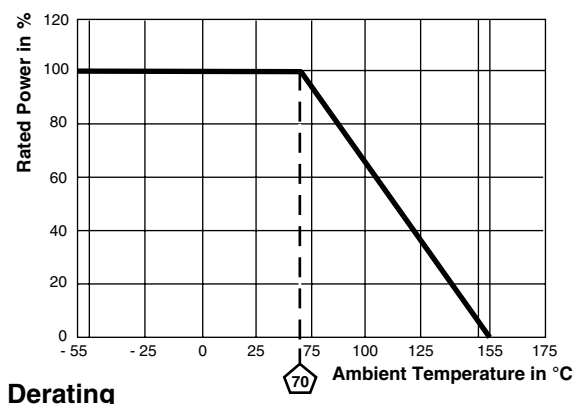**PERFORMANCE**

| TEST | CONDITIONS OF TEST | TEST LIMITS |
|---------------------------|---|---|
| Thermal Shock | MIL-STD-202, Method 107, - 55 °C to + 125 °C, 300 cycles at each extreme | $\pm (1.0 \% + 0.0005 \Omega) \Delta R$ |
| Short Time Overload | 2 x rated power; duration according the model | $\pm (0.5 \% + 0.0005 \Omega) \Delta R$ |
| High Temperature Exposure | MIL-STD-202, Method 108, 1000 h at T = 125 °C, 0 % power | $\pm (2.0 \% + 0.0005 \Omega) \Delta R$ |
| Temperature Cycling | JESD 22, Method JA-104, 1000 cycles (- 55 °C to + 125 °C) | $\pm (2.0 \% + 0.0005 \Omega) \Delta R$ |
| Biased Humidity | MIL-STD-202, Method 103, 1000 h 85 °C/85 % RH, 10% x (P x R) ^{1/2} | $\pm (2.0 \% + 0.0005 \Omega) \Delta R$ |
| Mechanical Shock | MIL-STD-202, Method 213, Condition C, 10 g's, 6 ms (half sine), 3 directions | $\pm (1.0 \% + 0.0005 \Omega) \Delta R$ |
| Vibration | MIL-STD-202, Method 204, 5 g's, 20 min, 12 cycles, 3 directions, 10 Hz to 2000 Hz | $\pm (1.0 \% + 0.0005 \Omega) \Delta R$ |
| Operational Life | MIL-STD-202, Method 108, 1000 h at T = 125 °C at rated power | $\pm (2.0 \% + 0.0005 \Omega) \Delta R$ |
| Resistance to Solder Heat | MIL-STD-202, Method 210, + 260 °C solder, 10 s to 12 s dwell, 25 mm/s emergence | $\pm (1.0 \% + 0.0005 \Omega) \Delta R$ |
| Moisture Resistance | MIL-STD-202, Method 106, 0 % power, 7a and 7b not required | $\pm (2.0 \% + 0.0005 \Omega) \Delta R$ |

PACKAGING

| MODEL | REEL | | | | |
|----------|------------------------|-----------|-------|-------------|------|
| | TAPE WIDTH | DIAMETER | PITCH | PIECES/REEL | CODE |
| RCWE0402 | 8 mm/punched paper | 180 mm/7" | 2 mm | 10 000 | EA |
| RCWE0603 | 8 mm/punched paper | 180 mm/7" | 4 mm | 5000 | EA |
| RCWE0805 | 8 mm/punched paper | 180 mm/7" | 4 mm | 5000 | EA |
| RCWE1206 | 8 mm/punched paper | 180 mm/7" | 4 mm | 5000 | EA |
| RCWE1210 | 8 mm/punched paper | 180 mm/7" | 4 mm | 5000 | EA |
| RCWE2010 | 12 mm/embossed plastic | 180 mm/7" | 4 mm | 4000 | EA |
| RCWE2512 | 12 mm/embossed plastic | 180 mm/7" | 8 mm | 2000 | EA |

Note

- Embossed carrier tape per EIA-481-1A



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.