

Date: 10/27/2008

VARISTOR SPECIFICATION SHEET

MAIDA STYLE NUMBER D6521ZOV200RA20

MAIDA ITEM NUMBER 01-0193

Electrical Specifications

Continuous AC Voltage	20	VAC
Continuous DC Voltage	26	VDC
Maximum DC Leakage @ 26 VDC	200	uA
Low Varistor Voltage Limit	30	VDC
High Varistor Voltage Limit	36	VDC
Nominal Varistor Voltage	33	VDC
Current for Varistor Voltage	1	mA
Maximum Clamp Voltage	65	V
Maximum Clamp Voltage Test Current	20	A
Peak Current Rating (1 Pulse)	3000	A
Peak Current Rating (2 Pulse)	2000	A
Energy Rating (8X20us)	24	J
Energy Rating (10X1000us)	24	J
Typical Capacitance	33000	pF
Impulse Response Time	< 50	ns
Minimum Hipot of Coating	2500	VDC
Minimum I.R. of Coating	1000	MΩ


Thermal Specifications

Minimum Operating Temperature	-40	°C
Maximum Operating Temperature	85	°C
Varistor Voltage Temperature Coeff	-0.05	%/°C
Minimum Storage Temperature	-50	°C
Maximum Storage Temperature	125	°C
Current/Energy Derating Above 85°C	-2.5	%/°C

Notes

Physical Specifications

Lead Style	110B1C
X Nominal	0.3 in.
X Tolerance	0.04 in.
Lead Length Nominal	1.00 in.
Lead Length Tolerance	min. in.
Y Nominal	0.065 in.
Y Tolerance	0.03 in.
d Nominal	0.032 in.
Wire Gauge	20 AWG
Minimum Marking	Z200-20UL
Nominal Disk Size	20 mm
D Maximum	0.905 in.
T Maximum	0.176 in.
H Maximum	1.03 in.

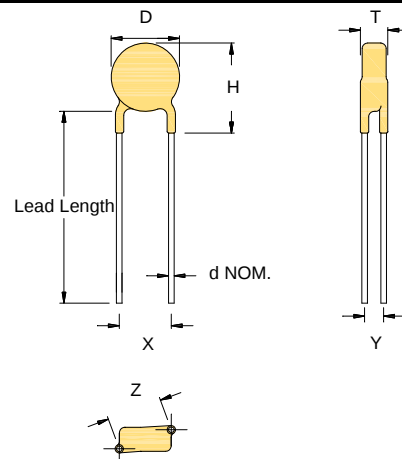

* Contact Maida for a more detailed configuration drawing.

Safety Agency Recognitions

UL 1449 File Number	E86730
UL 1414 File Number	
CSA File Number	
VDE File Number	
SEV File Number	



DEVELOPMENT COMPANY

P.O. Box 3529

Hampton, Virginia 23663

(757) 723-0785 Fax (757) 722-1194