

RICOH

R3112x SERIES

LOW VOLTAGE DETECTOR WITH OUTPUT DELAY

NO. EA-087-160310

OUTLINE

The R3112x Series are CMOS-based voltage detector ICs with high detector threshold accuracy and ultra-low supply current, which can be operated at an extremely low voltage and is used for system reset as an example.

Each of these ICs consists of a voltage reference unit, a comparator, resistor net for detector threshold setting, an output driver, a hysteresis circuit, and an output delay circuit. The detector threshold is fixed with high accuracy internally and does not require any adjustment. Two output types, Nch open drain type and CMOS type are available.

Three types of packages, SOT-23-5, small SC-82AB, SC-88A and ultra-small SON1612-6 can be selected so that high density mounting on boards is possible.

FEATURES


- Built-in Output Delay Circuit..... Typ. 100ms with an external capacitor: 0.022 μ F
- Supply Current..... Typ. 0.5 μ A (R3112x27xA/C, V_{DD} =2.6V)
- Operating Voltage 0.7 to 6.0V (T_{opt} =25°C)
- Detector Threshold..... 0.9V to 5.0V (0.1V steps)
- Detector Threshold Accuracy..... $\pm 2.0\%$
- Temperature-Drift Coefficient of Detector Threshold Typ. ± 100 ppm/°C
- Output Types..... Nch Open Drain and CMOS
- Packages SON1612-6, SC-82AB, SC-88A, SOT-23-5

APPLICATIONS

- CPU and Logic Circuit Reset
- Battery Checker
- Window Comparator
- Wave Shaping Circuit
- Battery Back-up Circuit
- Power Failure Detector

R3112x

BLOCK DIAGRAMS

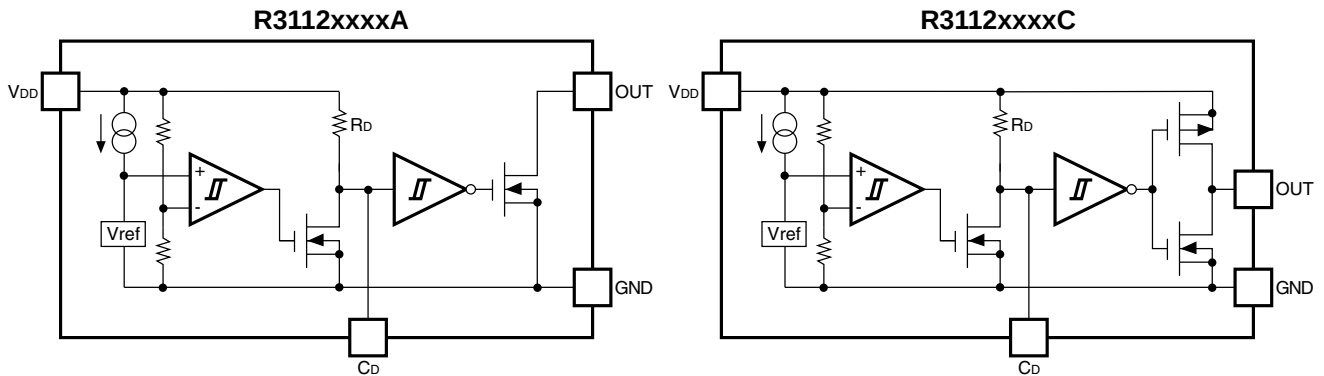

SELECTION GUIDE

The package type, the detector threshold, and the output type for the ICs can be selected at the users' request.


Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R3112Dxx1*-TR-FE	SON1612-6	4,000 pcs	Yes	Yes
R3112Qxx1*-TR-FE	SC-82AB	3,000 pcs	Yes	Yes
R3112Qxx2*-TR-FE	SC-88A	3,000 pcs	Yes	Yes
R3112Nxx1*-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes

xx: The detector threshold can be designated in the range from 0.9V(09) to 5.0V(50) in 0.1V steps.


* : Designation of Output Type
 (A) Nch Open Drain
 (C) CMOS

PIN CONFIGURATION


● SON1612-6




● SC-82AB



● SC-88A



● SOT-23-5



PIN DESCRIPTION

● SON1612-6

Pin No	Symbol	Pin Description
1	OUT	Output Pin (Output "L" at detection)
2	GND	Ground Pin
3	C _D	Pin for External Capacitor (for setting output delay)
4	NC	No Connection
5	GND	Ground Pin
6	V _{DD}	Voltage Supply Pin

● SC-82AB

Pin No	Symbol	Pin Description
1	V _{DD}	Voltage Supply Pin
2	GND	Ground Pin
3	C _D	Pin for External Capacitor (for setting output delay)
4	OUT	Output Pin (Output "L" at detection)

● SC-88A

Pin No	Symbol	Pin Description
1	V _{DD}	Voltage Supply Pin
2	NC	No Connection
3	GND	Ground Pin
4	C _D	Pin for External Capacitor (for setting output delay)
5	OUT	Output Pin (Output "L" at detection)

● SOT-23-5

Pin No	Symbol	Pin Description
1	OUT	Output Pin (Output "L" at detection)
2	V _{DD}	Voltage Supply Pin
3	GND	Ground Pin
4	NC	No Connection
5	C _D	Pin for External Capacitor (for setting output delay)

R3112x

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{DD}	Supply Voltage	6.5	V
V_{OUT}	Output Voltage (CMOS)	$V_{SS}-0.3$ to $V_{DD}+0.3$	V
	Output Voltage (Nch)	$V_{SS}-0.3$ to 6.5	V
I_{OUT}	Output Current	20	mA
P_D	Power Dissipation (SON1612-6)*	500	mW
	Power Dissipation (SC-82AB)*	380	
	Power Dissipation (SC-88A)*	380	
	Power Dissipation (SOT-23-5)*	420	
T_{opt}	Operating Temperature Range	-40 to 85	°C
T_{stg}	Storage Temperature Range	-55 to 125	°C

*) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

ELECTRICAL CHARACTERISTICS

• R3112xxxxA/C

T_{opt}=25°C

Symbol	Item	Conditions		Min.	Typ.	Max.	Unit
-V _{DET}	Detector Threshold			-V _{DET} ×0.98		-V _{DET} ×1.02	V
V _{HYS}	Detector Threshold Hysteresis			-V _{DET} ×0.03	-V _{DET} ×0.05	-V _{DET} ×0.07	V
I _{SS}	Supply Current	-V _{DET} <1.1V	V _{DD} =-V _{DET} -0.1V		0.6	2.0	μA
			V _{DD} =-V _{DET} +1.0V		0.5	2.0	
		1.1V ≤ -V _{DET} <1.6V	V _{DD} =-V _{DET} -0.1V		0.7	2.5	
			V _{DD} =-V _{DET} +1.0V		0.5	2.0	
		1.6V ≤ -V _{DET} <3.1V	V _{DD} =-V _{DET} -0.1V		1.0	3.0	
			V _{DD} =-V _{DET} +1.0V		0.5	2.5	
		3.1V ≤ -V _{DET} <4.1V	V _{DD} =-V _{DET} -0.1V		1.2	3.0	
			V _{DD} =-V _{DET} +1.0V		0.6	2.5	
		4.1V ≤ -V _{DET}	V _{DD} =-V _{DET} -0.1V		1.5	3.0	
			V _{DD} =-V _{DET} +1.0V		0.6	2.5	
V _{DDH}	Maximum Operating Voltage					6.0	V
V _{DDL}	Minimum Operating Voltage*	T _{opt} =25°C				0.7	V
		-40°C ≤ T _{opt} ≤ 85°C				0.8	
I _{OUT}	Output Current (Driver Output Pin)	Nch	V _{DS} =0.05V V _{DD} =0.7V	0.01	0.12		mA
			-V _{DET} <1.1V V _{DS} =0.50V V _{DD} =0.85V	0.05	0.9		
			1.1V ≤ -V _{DET} <1.6V V _{DS} =0.50V V _{DD} =1.00V	0.2	1.8		
			1.6V ≤ -V _{DET} V _{DS} =0.50V V _{DD} =1.50V	1.0	3.0		
		Pch	-V _{DET} <4.0V V _{DS} =-2.1V V _{DD} =4.50V	1.5	3.5		mA
			4.0V ≤ -V _{DET} V _{DS} =-2.1V V _{DD} =6.00V	2.0	4.5		
V _{TCD}	C _D pin Threshold Voltage	V _{DD} =-V _{DET} ×1.1V		V _{DD} ×0.3	V _{DD} ×0.5	V _{DD} ×0.7	V
I _{CD}	C _D pin Output Current	V _{DS} =0.1V, V _{DD} =0.7V		20	70		μA
		-V _{DET} <1.1V	V _{DS} =0.50V, V _{DD} =0.85V	10	400		
		1.1V ≤ -V _{DET} <1.6V	V _{DS} =0.50V, V _{DD} =1.00V	50	450		
		1.6V ≤ -V _{DET}	V _{DS} =0.50V, V _{DD} =1.50V	200	500		
R _D	Output Delay Resistance			3.25	6.5	13	MΩ
Δ-V _{DET} / ΔT _{opt}	Detector Threshold Temperature Coefficient	-40°C ≤ T _{opt} ≤ 85°C			±100		ppm/ °C

*) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less.
(In the case of Nch Open Drain Type, Output pin is pulled up with a resistance of 470kΩ to 5.0V.)

* R3112Qxx2 (SC-88A) is the non-promotional product as of March, 2016.

R3112x

ELECTRICAL CHARACTERISTICS BY DETECTOR THRESHOLD

Product Code	Detector Threshold			Hysteresis Range			Supply Current 1			Supply Current 2			Output Current 1			Output Current 2									
	-V _{DET} [V]			V _{HYS} [V]			I _{SS1} [μA]			I _{SS2} [μA]			I _{OUT1} [mA]			I _{OUT2} [mA]									
	Min.	Typ.	Max.	Min.	Typ.	Max.	Condi-tions	Typ.	Max.	Condi-tions	Typ.	Max.	Condi-tions	Min.	Typ.	Conditions	Min.	Typ.							
R3112x09xA/C	0.882	0.900	0.918	0.027	0.045	0.063	V _{DD} = -V _{DET} -0.1V	0.6	2.0	V _{DD} = -V _{DET} +1.0V	0.5	2.0	V _{DS} = 0.05V V _{DD} = 0.7V	0.01	0.12	Nch	V _{DS} = 0.5V V _{DD} = 0.85V	0.05	0.9						
R3112x10xA/C	0.980	1.000	1.020	0.030	0.050	0.070		0.7	2.5								0.5	2.0	V _{DS} = 0.5V V _{DD} = 1.0V	0.2	1.8				
R3112x11xA/C	1.078	1.100	1.122	0.033	0.055	0.077													1.0	3.0	0.5	2.5	V _{DS} = 0.5V V _{DD} = 1.5V	1.0	3.0
R3112x12xA/C	1.176	1.200	1.224	0.036	0.060	0.084																			
R3112x13xA/C	1.274	1.300	1.326	0.039	0.065	0.091																			
R3112x14xA/C	1.372	1.400	1.428	0.042	0.070	0.098																			
R3112x15xA/C	1.470	1.500	1.530	0.045	0.075	0.105																			
R3112x16xA/C	1.568	1.600	1.632	0.048	0.080	0.112																			
R3112x17xA/C	1.666	1.700	1.734	0.051	0.085	0.119																			
R3112x18xA/C	1.764	1.800	1.836	0.054	0.090	0.126																			
R3112x19xA/C	1.862	1.900	1.938	0.057	0.095	0.133																			
R3112x20xA/C	1.960	2.000	2.040	0.060	0.100	0.140																			
R3112x21xA/C	2.058	2.100	2.142	0.063	0.105	0.147																			
R3112x22xA/C	2.156	2.200	2.244	0.066	0.110	0.154																			
R3112x23xA/C	2.254	2.300	2.346	0.069	0.115	0.161																			
R3112x24xA/C	2.352	2.400	2.448	0.072	0.120	0.168																			
R3112x25xA/C	2.450	2.500	2.550	0.075	0.125	0.175																			
R3112x26xA/C	2.548	2.600	2.652	0.078	0.130	0.182																			
R3112x27xA/C	2.646	2.700	2.754	0.081	0.135	0.189																			
R3112x28xA/C	2.744	2.800	2.856	0.084	0.140	0.196																			
R3112x29xA/C	2.842	2.900	2.958	0.087	0.145	0.203																			
R3112x30xA/C	2.940	3.000	3.060	0.090	0.150	0.210																			
R3112x31xA/C	3.038	3.100	3.162	0.093	0.155	0.217																			
R3112x32xA/C	3.136	3.200	3.264	0.096	0.160	0.224																			
R3112x33xA/C	3.234	3.300	3.366	0.099	0.165	0.231																			
R3112x34xA/C	3.332	3.400	3.468	0.102	0.170	0.238																			
R3112x35xA/C	3.430	3.500	3.570	0.105	0.175	0.245																			
R3112x36xA/C	3.528	3.600	3.672	0.108	0.180	0.252																			
R3112x37xA/C	3.626	3.700	3.774	0.111	0.185	0.259																			
R3112x38xA/C	3.724	3.800	3.876	0.114	0.190	0.266																			
R3112x39xA/C	3.822	3.900	3.978	0.117	0.195	0.273																			
R3112x40xA/C	3.920	4.000	4.080	0.120	0.200	0.280																			
R3112x41xA/C	4.018	4.100	4.182	0.123	0.205	0.287																			
R3112x42xA/C	4.116	4.200	4.284	0.126	0.210	0.294																			
R3112x43xA/C	4.214	4.300	4.386	0.129	0.215	0.301																			
R3112x44xA/C	4.312	4.400	4.488	0.132	0.220	0.308																			
R3112x45xA/C	4.410	4.500	4.590	0.135	0.225	0.315																			
R3112x46xA/C	4.508	4.600	4.692	0.138	0.230	0.322																			
R3112x47xA/C	4.606	4.700	4.794	0.141	0.235	0.329																			
R3112x48xA/C	4.704	4.800	4.896	0.144	0.240	0.336																			
R3112x49xA/C	4.802	4.900	4.998	0.147	0.245	0.343																			
R3112x50xA/C	4.900	5.000	5.100	0.150	0.250	0.350																			

* R3112Qxx2 (SC-88A) is the non-promotional product as of March, 2016.

R3112x

Output Current 3				Minimum Operating Voltage				Cd pin Threshold Voltage				Cd pin Output Current 1			Cd pin Output Current 2			Resistance for Output Delay			Detector Threshold Temperature		
Iout3[mA]				VDDL[V]				VTCD[V]				Icd1[μA]			Icd2[μA]			RD[MΩ]			Δ-VDET/ ΔTopt [ppm/°C]		
Condition		Min.	Typ.	Condition	Max.	Condition	Max.	Condition	Min.	Typ.	Max.	Condition	Min.	Typ.	Condition	Min.	Typ.	Min.	Typ.	Max.	Condition	Typ.	
Pch	VDS=−2.1V VDD=4.5V	1.5	3.5	Topt=25°C	0.7	−40°C ≧ Topt ≧ 85°C	0.8	VDD= (-VDET) ×1.1V		0.297	0.495	0.693	VDS=0.1V VDD=0.7V	20	70	VDS=0.5V VDD=0.85V	10	400	3.25	6.5	13.0	−40°C ≧ Topt ≧ 85°C	±100
										0.330	0.550	0.770											
										0.363	0.605	0.847											
										0.396	0.660	0.924											
										0.429	0.715	1.001											
										0.462	0.770	1.078											
										0.495	0.825	1.155											
										0.528	0.880	1.232											
										0.561	0.935	1.309											
										0.594	0.990	1.386											
										0.627	1.045	1.463											
										0.660	1.100	1.540											
										0.693	1.155	1.617											
										0.726	1.210	1.694											
										0.759	1.265	1.771											
										0.792	1.320	1.848											
										0.825	1.375	1.925											
										0.858	1.430	2.002											
		0.891	1.485						2.079														
		0.924	1.540						2.156														
		0.957	1.595						2.233														
		0.990	1.650						2.310														
		1.023	1.705						2.387														
		1.056	1.760						2.464														
		1.089	1.815						2.541														
		1.122	1.870						2.618														
		1.155	1.925						2.695														
		1.188	1.980						2.772														
		1.221	2.035						2.849														
		1.254	2.090						2.926														
		1.287	2.145						3.003														
		1.320	2.200						3.080														
		1.353	2.255						3.157														
		1.386	2.310						3.234														
		1.419	2.365						3.311														
		1.452	2.420						3.388														
	1.485	2.475	3.465																				
	1.518	2.530	3.542																				
	1.551	2.585	3.619																				
	1.584	2.640	3.696																				
	1.617	2.695	3.773																				
	1.650	2.750	3.850																				
	VDS=−2.1V VDD=6.0V	2.0	4.5												VDS=0.5V VDD=1.5V	200	500						

R3112x

OPERATION


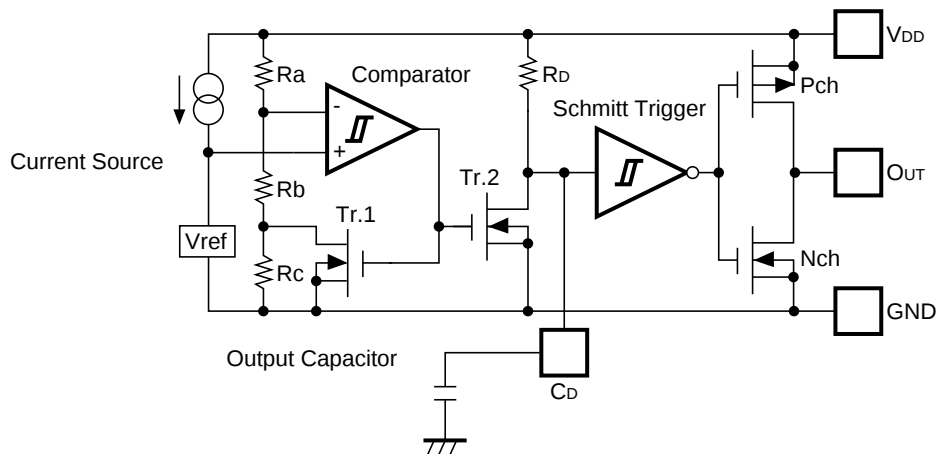


Fig. 1 Block Diagram with an external capacitor

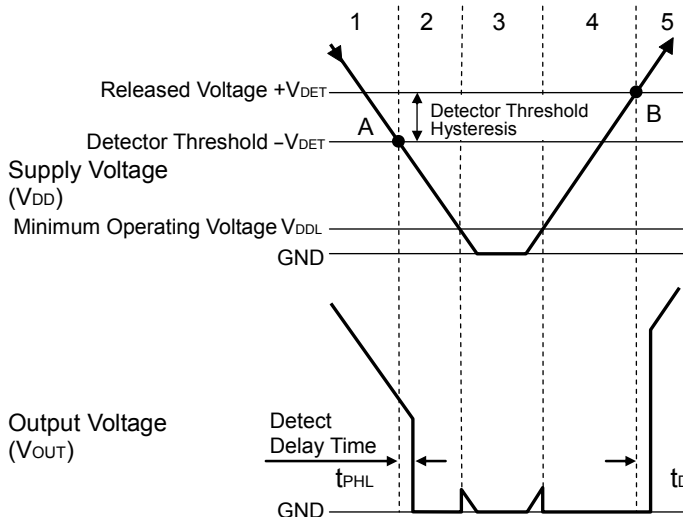

Step	1	2	3	4	5
Comparator (-) Pin Input Voltage	I	II	II	II	I
Comparator Output	L	H	Indefinite	H	L
Tr.1,2	OFF	ON	Indefinite	ON	OFF
Output Tr.	Pch	ON	OFF	Indefinite	OFF
	Nch	OFF	ON	Indefinite	ON


$$I \quad \frac{R_b + R_c}{R_a + R_b + R_c} \times V_{DD}$$

$$II \quad \frac{R_b}{R_a + R_b} \times V_{DD}$$

Fig. 2 Operation Diagram

- Output voltage is equal to supply voltage. (As for Nch open drain type, equal to pull-up voltage.)
 - When the supply voltage is down to the detector threshold voltage level (Point A), $V_{ref} \geq V_{DD} \times (R_b + R_c) / (R_a + R_b + R_c)$ is true, then output of the comparator is reversed from "L" to "H", therefore output voltage becomes GND level.
 - When the supply voltage is lower than minimum operating voltage, the operation of output transistor is indefinite. In the case of Nch open drain type, output voltage is equal to pull-up voltage.
 - Output Voltage becomes GND level.
 - When the supply voltage is higher than released voltage (Point B), $V_{ref} \leq V_{DD} \times R_b / (R_a + R_b)$ is true, then output of the comparator reaches the threshold level, and Output of Shmitt Trigger is reversed from "H" to "L", then output voltage is equal to supply voltage. (As for Nch open drain type, equal to pull-up voltage.)
- *) The difference between released voltage and detector threshold voltage means hysteresis range voltage.

• Operation of Output Delay

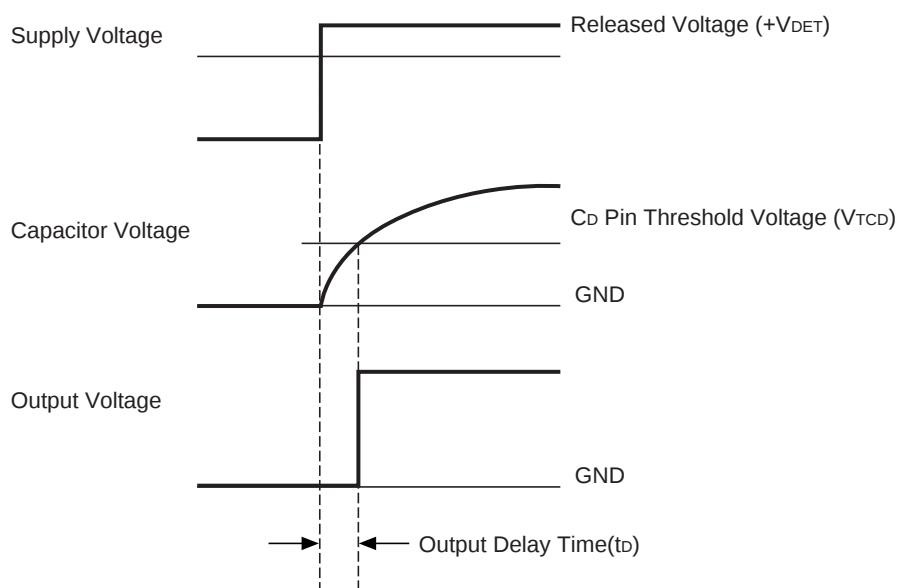

When the supply voltage which is higher than released voltage is forced to V_{DD} pin, charge to an external capacitor starts, then capacitor voltage increases. Until the capacitor voltage reaches to C_D Pin threshold voltage, output voltage maintains "L". When the capacitor voltage becomes higher than C_D pin threshold voltage, output voltage is reversed from "L" to "H". Where, the time interval between the rising edge of supply voltage and output voltage reverse point means output delay time.

• Output Delay Time

Output Delay Time (t_D) can be calculated with the next formula.

$$t_D = 0.69 \times R_D \times C_D (\text{s})$$


R_D is internal resistor and set at $6.5\text{M}\Omega$ (Typ.) typically. C_D (F) describes the capacitance value of an external capacitor. Therefore,

$$t_D = 0.69 \times 6.5 \times 10^6 \times C_D (\text{s})$$


R3112x

TEST CIRCUITS


*Pull-up circuit is not necessary for CMOS Output type, or R3112xxxxC.




Supply Current Test Circuit

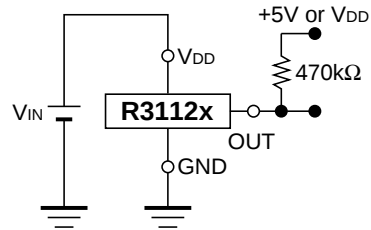

Detector Threshold Test Circuit

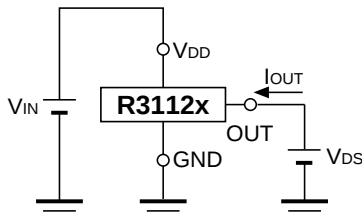


Nch Driver Output Current Test Circuit

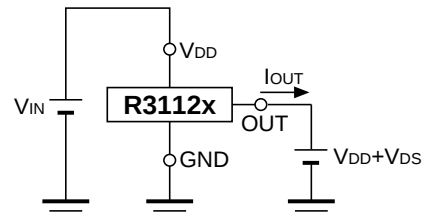


Pch Driver Output Current Test Circuit


*Apply only to CMOS

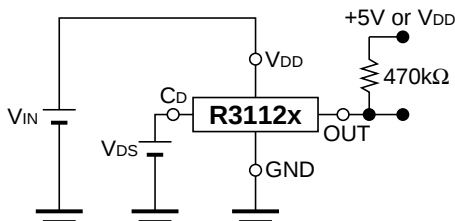

CD Pin Threshold Test Circuit







CD Pin Output Current Test Circuit

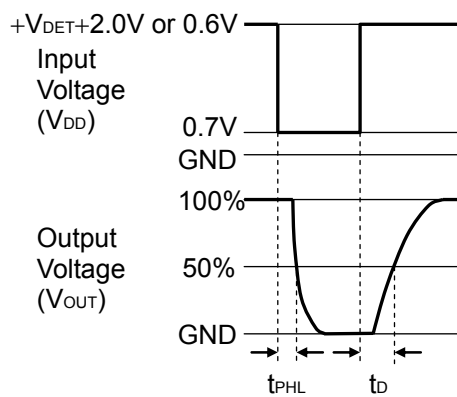



Output Delay Time Test Circuit

TYPICAL CHARACTERISTICS



1) Supply Current vs. Input Voltage

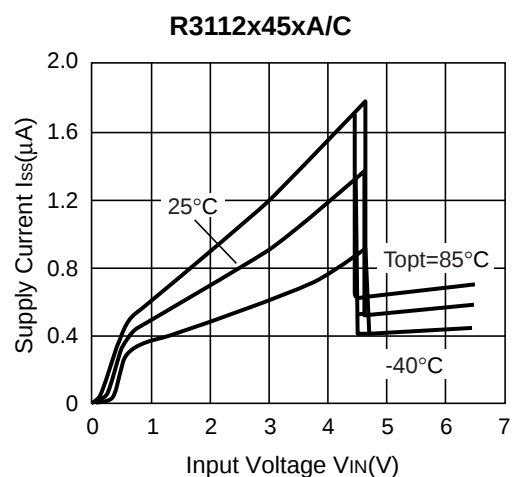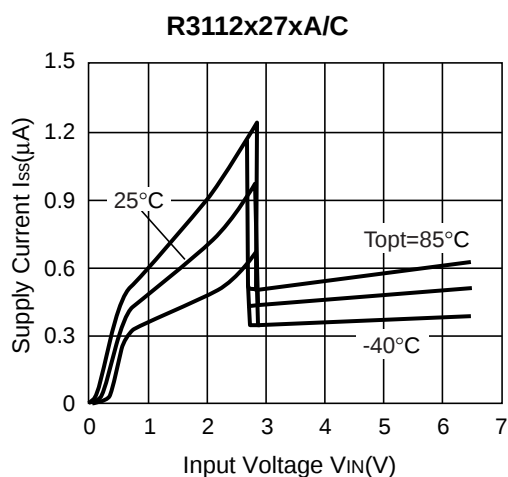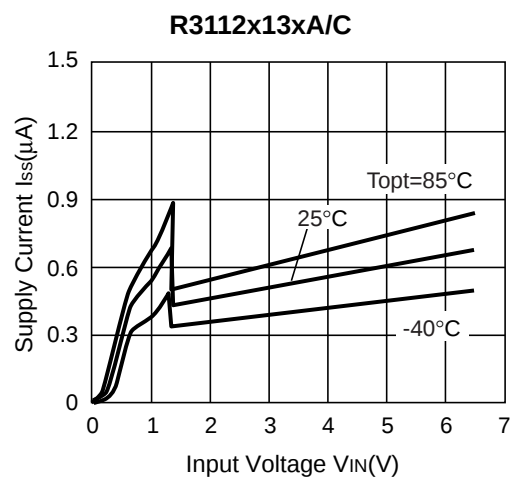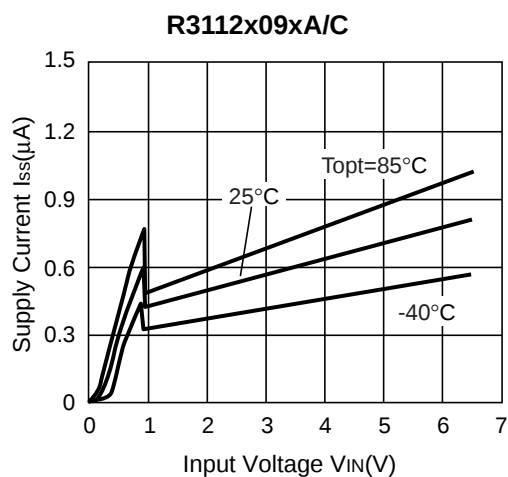





2) Detector Threshold vs. Temperature



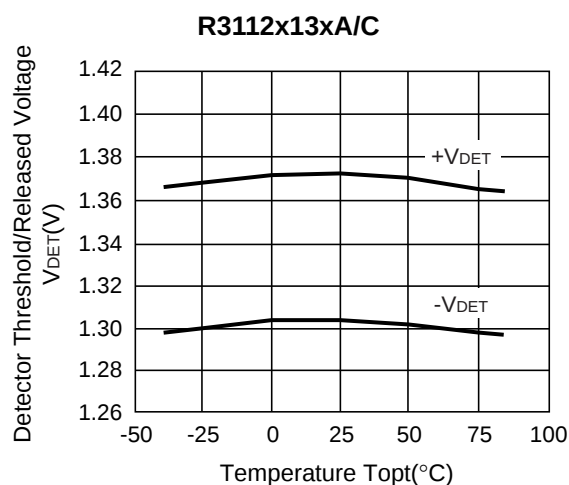
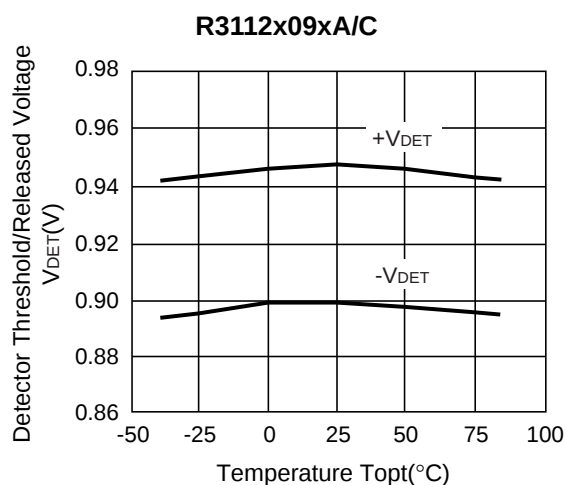


R3112x

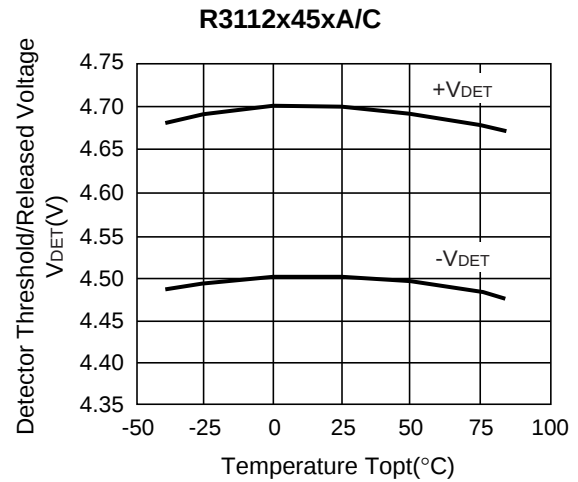
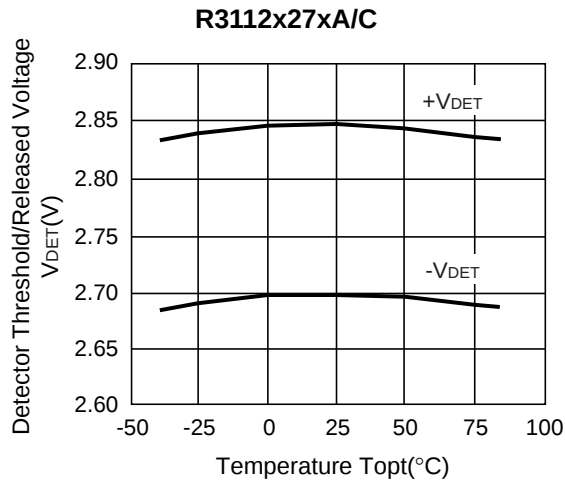


3) Output Voltage vs. Input Voltage

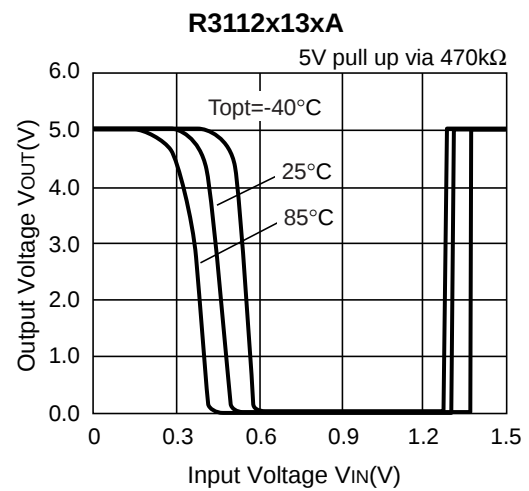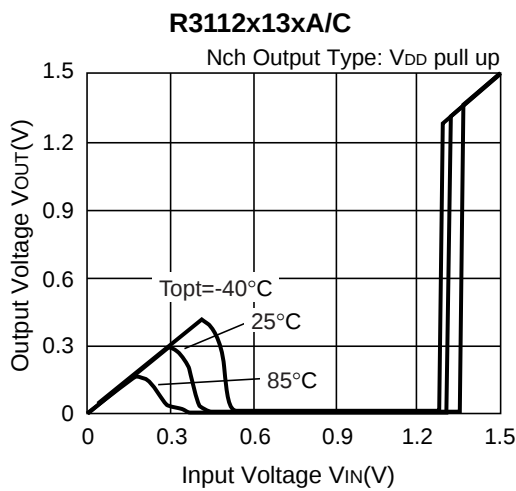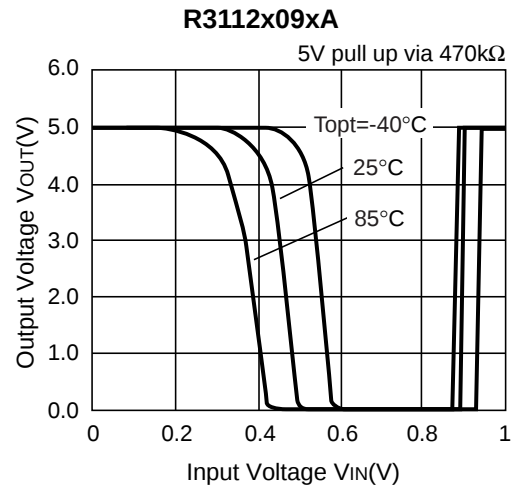
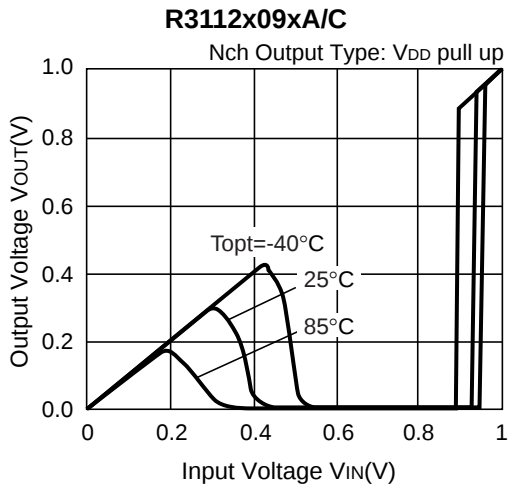


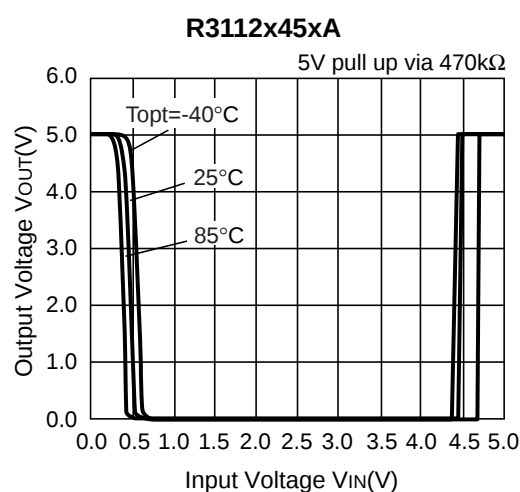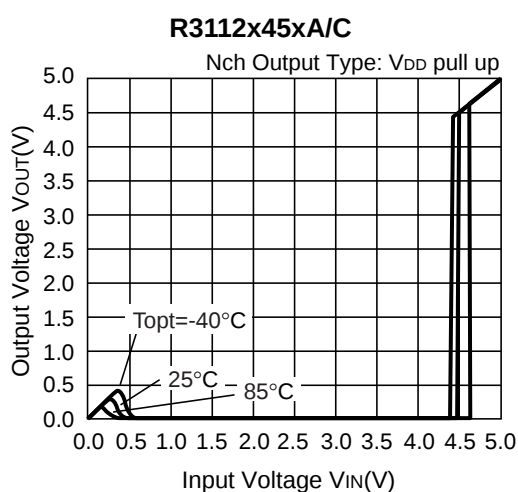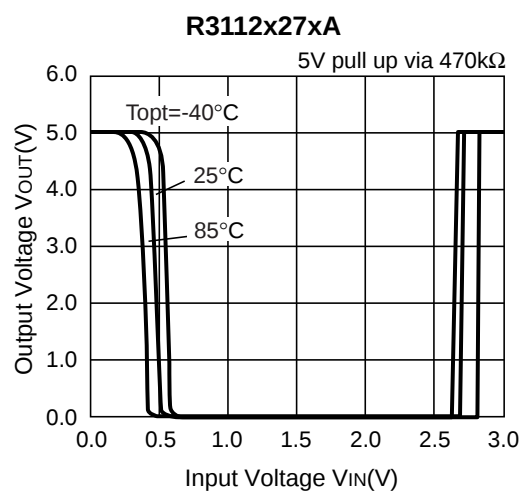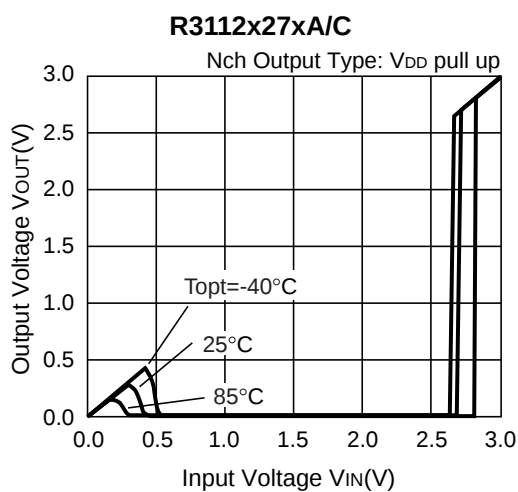





4) Nch Driver Output Current vs. V_{DS}

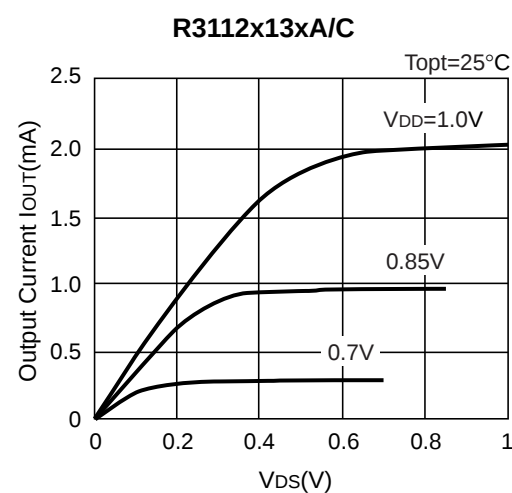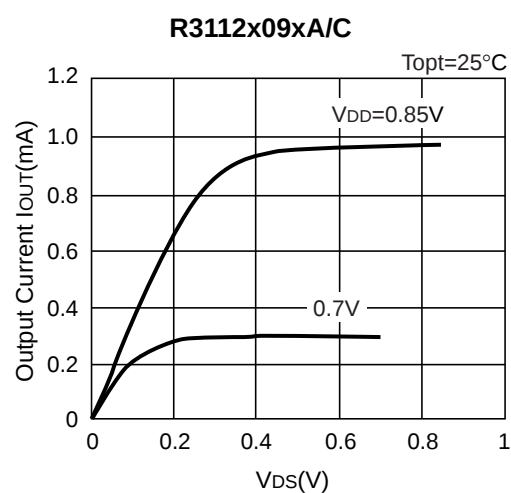





R3112x

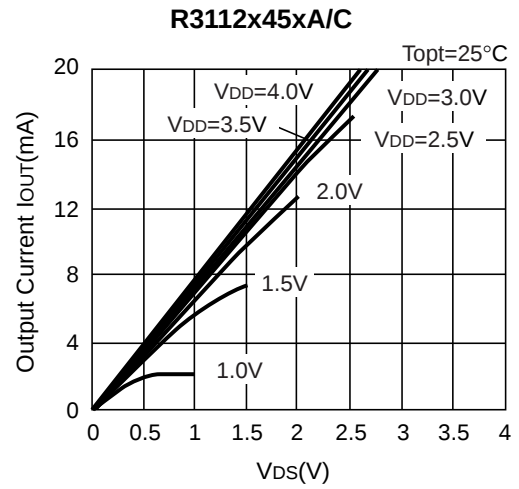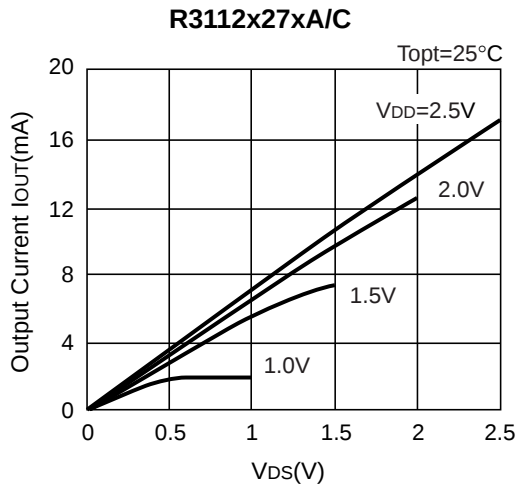



5) Nch Driver Output Current vs. Input Voltage

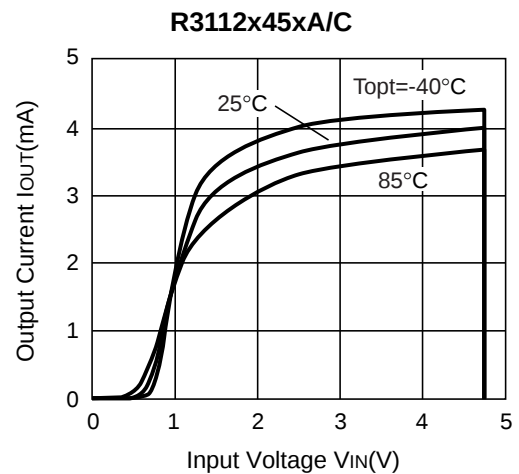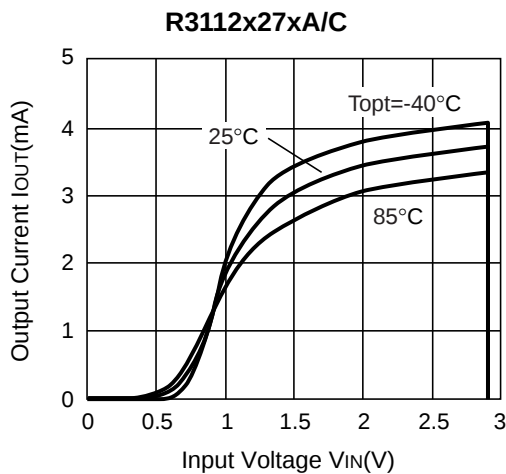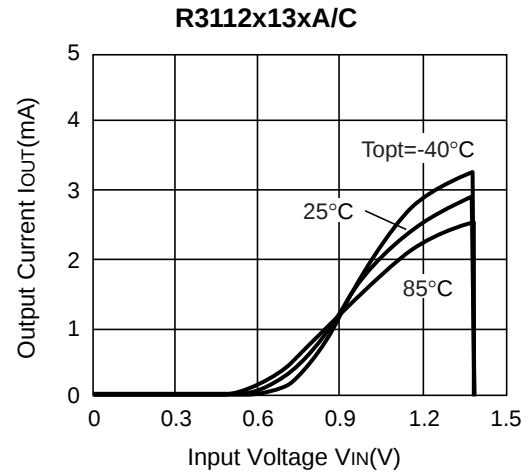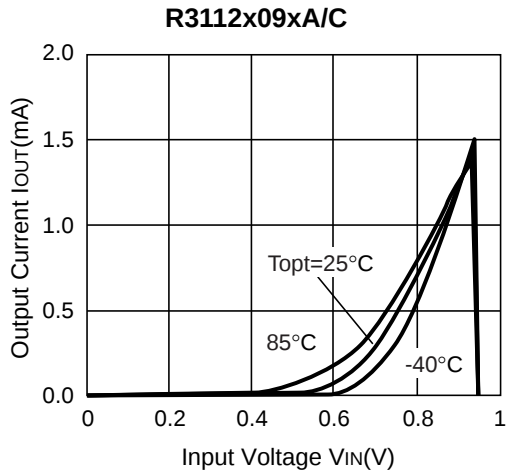



6) Pch Driver Output Current vs. Input Voltage

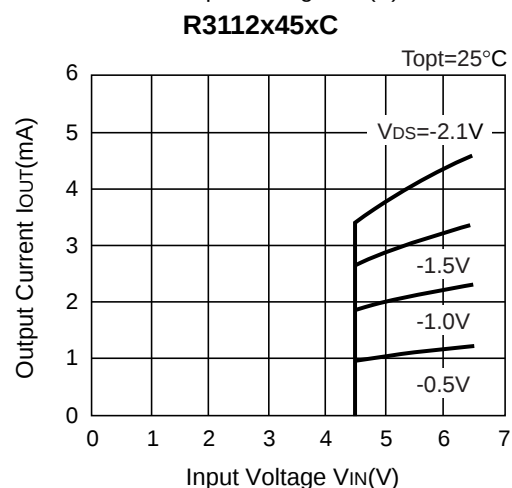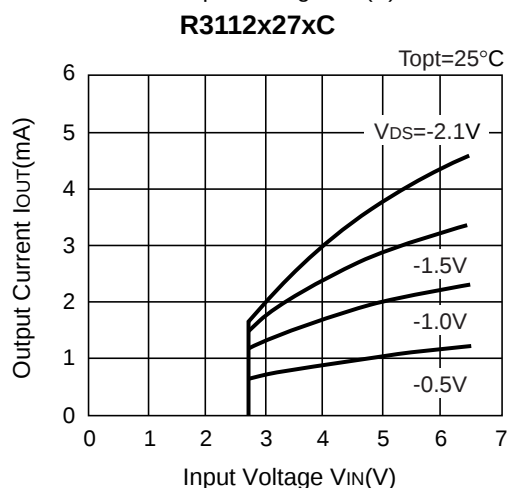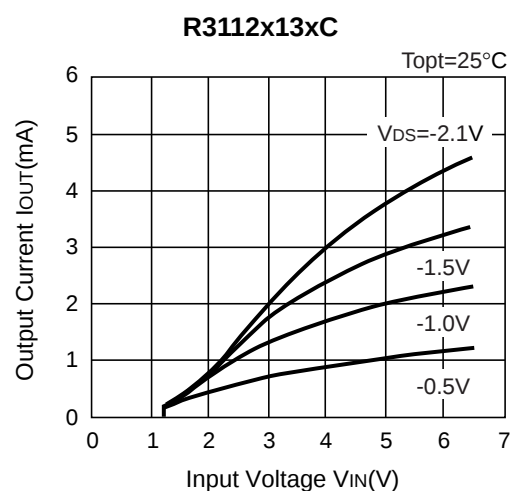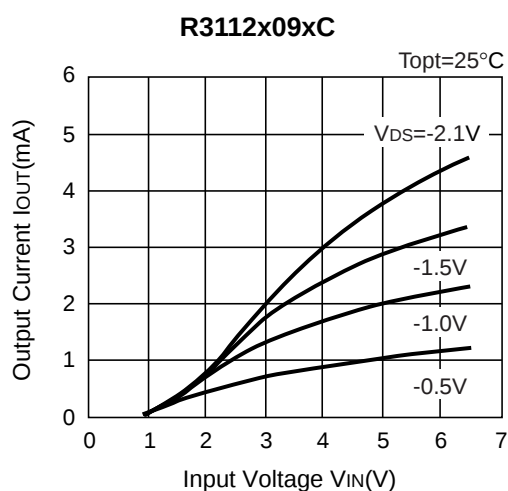





7) Cd Pin Threshold Voltage vs. Temperature

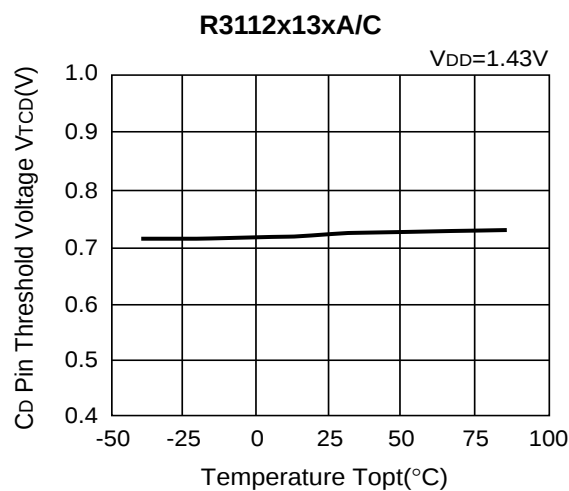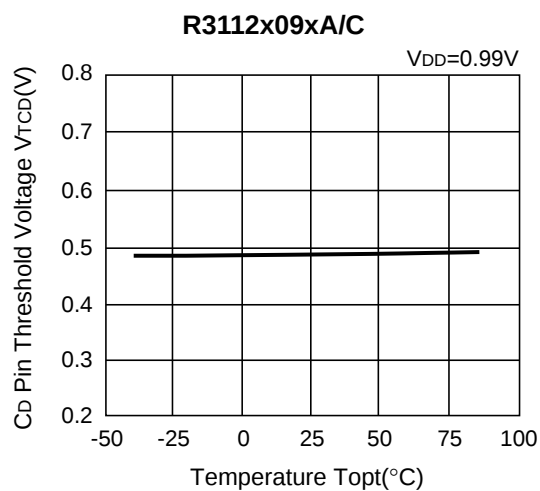





R3112x

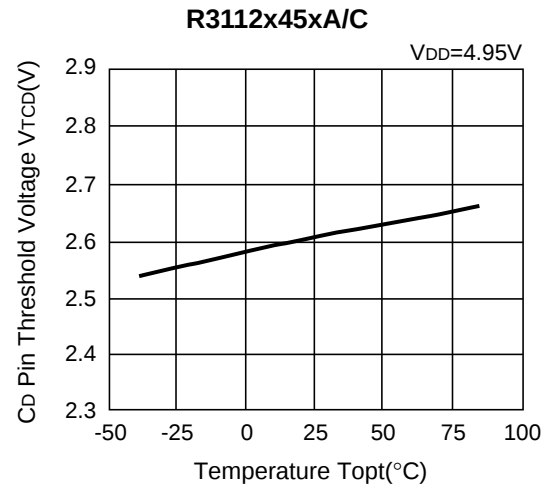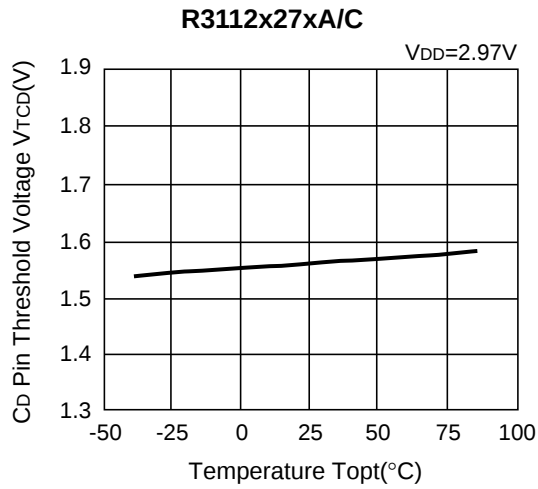



8) C_D Pin Output Current vs. Input Voltage

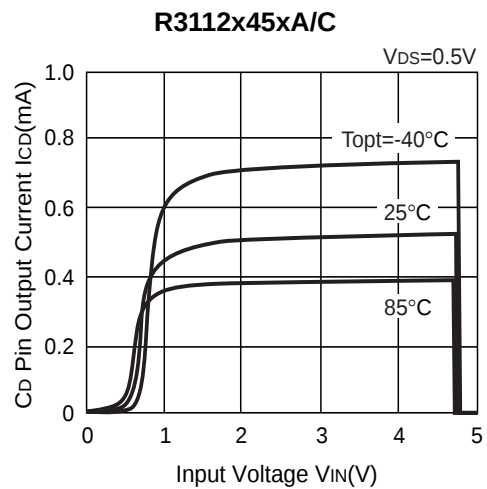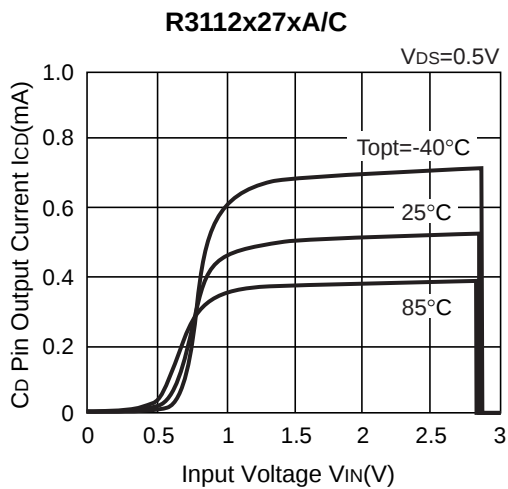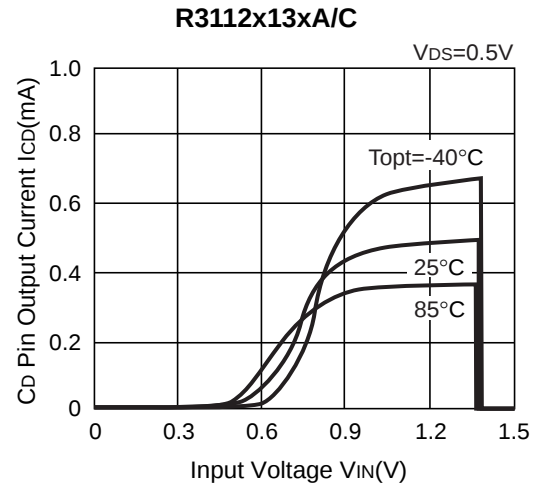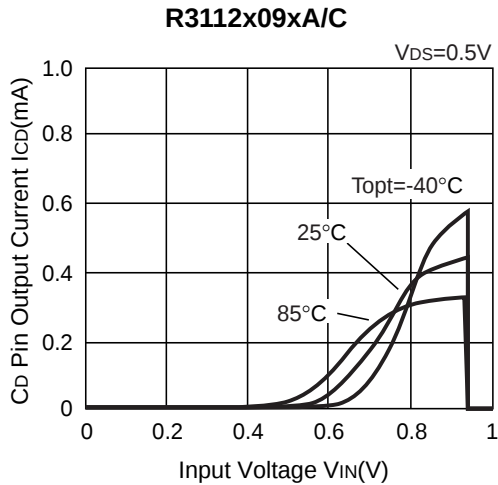



9) C_D Pin Output Current vs. V_{DS} ($T_{opt}=25^\circ\text{C}$)

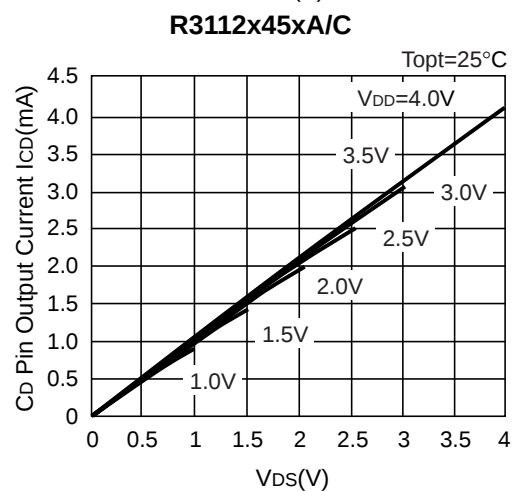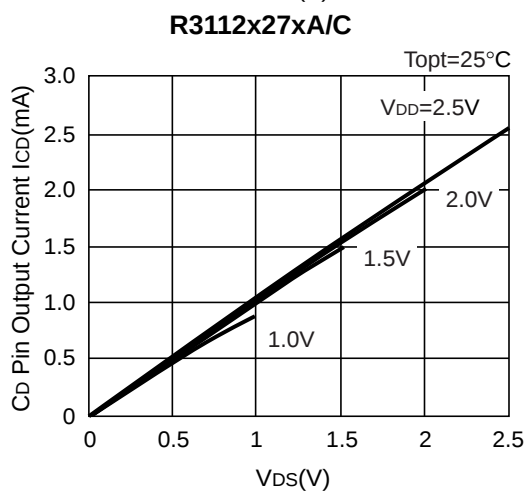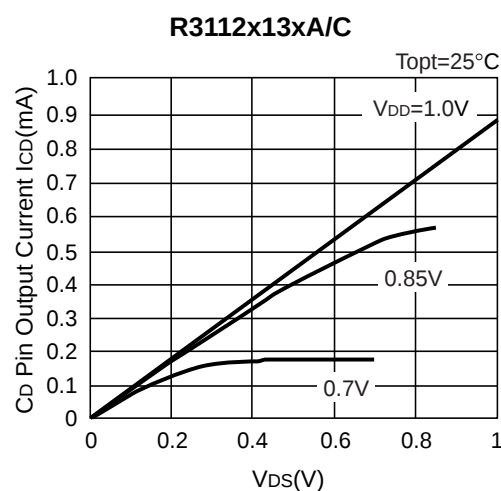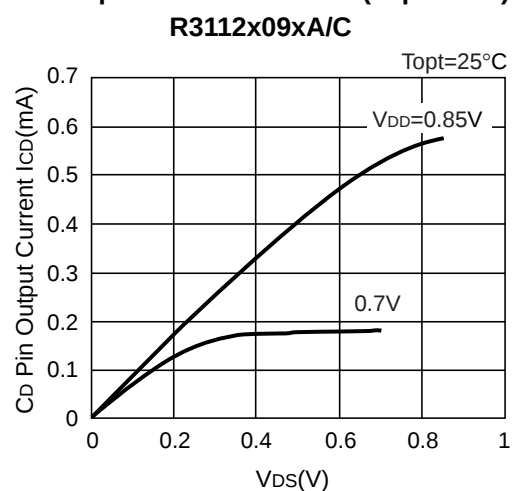


10) Output Delay Time vs. External Capacitance ($T_{opt}=25^\circ\text{C}$)

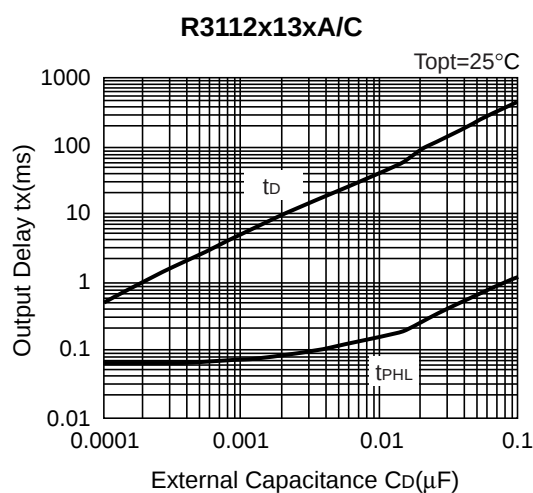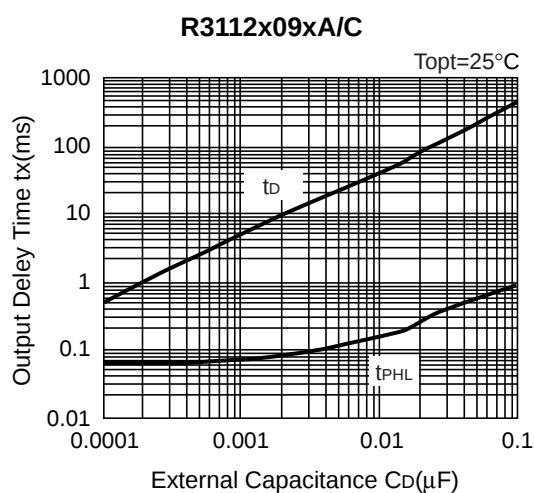

R3112x

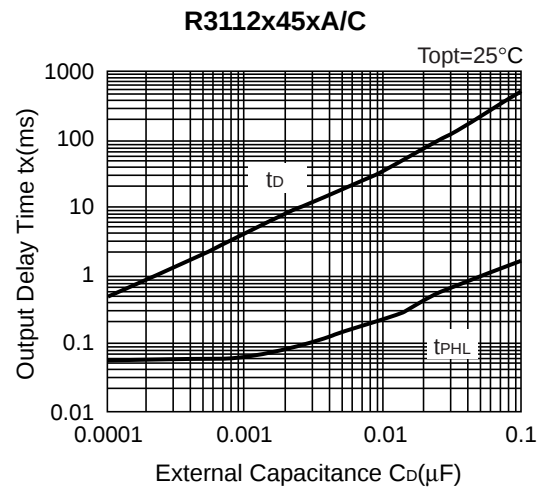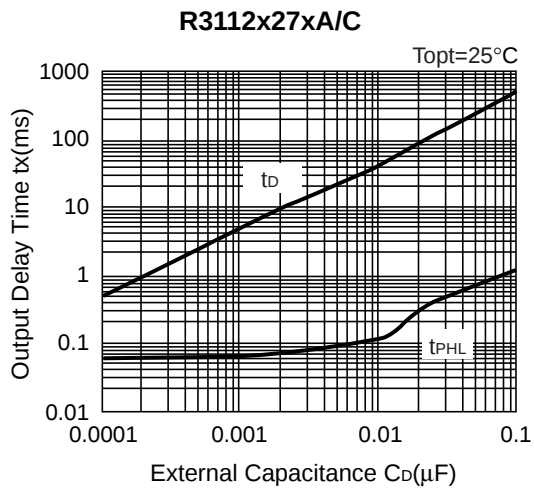

11) Delay Circuit Resistance vs. Temperature

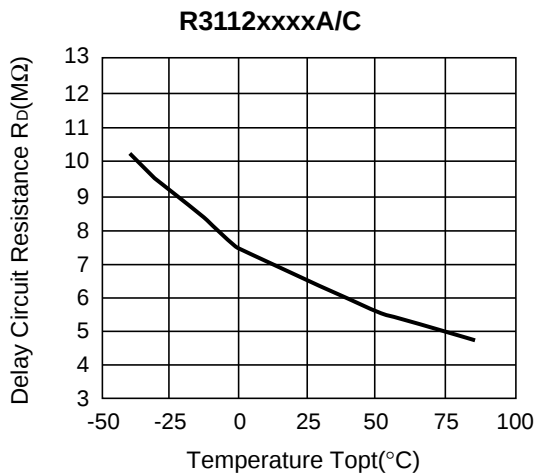

TECHNICAL NOTES

When connecting resistors to the device's input pin

When connecting a resistor (R1) to an input of this device, the input voltage decreases by [Device's Consumption Current] x [Resistance Value] only. And, the cross conduction current^{*1}, which occurs when changing from the detecting state to the release state, is decreased the input voltage by [Cross Conduction Current] x [Resistance Value] only. And then, this device will enter the re-detecting state if the input voltage reduction is larger than the difference between the detector voltage and the released voltage.

When the input resistance value is large and the VDD is gone up at mildly in the vicinity of the released voltage, repeating the above operation may result in the occurrence of output.

As shown in Figure A/B, set R1 to become 100 kΩ or less as a guide, and connect C_{IN} of 0.1 μF and more to between the input pin and GND. Besides, make evaluations including temperature properties under the actual usage condition, with using the evaluation board like this way. As a result, make sure that the cross conduction current has no problem.

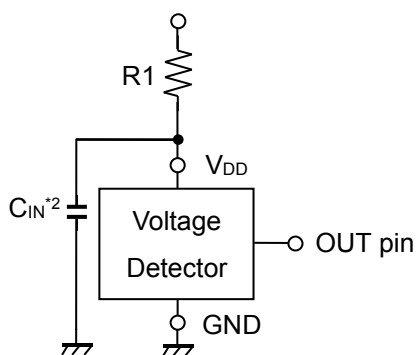


Figure A

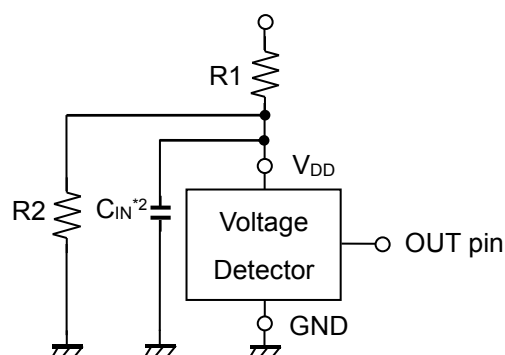


Figure B

^{*1} In the CMOS output type, a charging current for OUT pin is included.

^{*2} Note the bias dependence of capacitors.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

RICOH ELECTRONIC DEVICES CO., LTD.

Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre
Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

RICOH INTERNATIONAL B.V. - German Branch

Semiconductor Sales and Support Centre
Oberrather Strasse 6, 40472 Düsseldorf, Germany
Phone: +49-211-6546-0

RICOH ELECTRONIC DEVICES KOREA CO., LTD.

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203, People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH ELECTRONIC DEVICES CO., LTD.

Taipei office
Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ricoh Electronics:

<u>R3112N101A-TR-FE</u>	<u>R3112N211A-TR-FE</u>	<u>R3112N211C-TR-FE</u>	<u>R3112N091A-TR-FE</u>	<u>R3112N221A-TR-FE</u>
<u>R3112N311A-TR-FE</u>	<u>R3112N221C-TR-FE</u>	<u>R3112N311C-TR-FE</u>	<u>R3112N341C-TR-FE</u>	<u>R3112Q161A-TR-FE</u>
<u>R3112D401A-TR-FE</u>	<u>R3112Q161C-TR-FE</u>	<u>R3112Q151A-TR-FE</u>	<u>R3112Q171A-TR-FE</u>	<u>R3112D271A-TR-FE</u>
<u>R3112D301A-TR-FE</u>	<u>R3112Q131A-TR-FE</u>	<u>R3112D351A-TR-FE</u>	<u>R3112N331A-TR-FE</u>	<u>R3112D401C-TR-FE</u>
<u>R3112D271C-TR-FE</u>	<u>R3112D301C-TR-FE</u>	<u>R3112D311A-TR-FE</u>	<u>R3112D311C-TR-FE</u>	<u>R3112D321A-TR-FE</u>
<u>R3112D321C-TR-FE</u>	<u>R3112N361C-TR-FE</u>	<u>R3112Q131C-TR-FE</u>	<u>R3112Q141A-TR-FE</u>	<u>R3112Q141C-TR-FE</u>
<u>R3112Q151C-TR-FE</u>	<u>R3112Q171C-TR-FE</u>	<u>R3112N321C-TR-FE</u>	<u>R3112N331C-TR-FE</u>	<u>R3112N341A-TR-FE</u>
<u>R3112N351A-TR-FE</u>	<u>R3112N351C-TR-FE</u>	<u>R3112N361A-TR-FE</u>	<u>R3112D341A-TR-FE</u>	<u>R3112D361C-TR-FE</u>
<u>R3112D381C-TR-FE</u>	<u>R3112N091C-TR-FE</u>	<u>R3112N101C-TR-FE</u>	<u>R3112N321A-TR-FE</u>	