

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:



- 1.1 FREQUENCY RANGE: 2.0 to 4.0 GHz
- 1.2 INSERTION LOSS: 0.4dB MAX.
- 1.3 ISOLATION: 20dB MIN.
- 1.4 VSWR (MAX): 1.35:1 MAX.
- 1.5 OUTPUT UNBALANCE:
 - 1.5.1 AMPLITUDE: 0.2dB
 - 1.5.2 PHASE: 2°
- 1.6 MAXIMUM INPUT POWER: 3 WATTS MAX.

2.0 FINISH:

- 2.1 GREY PER MIL-E-15090 TYPE II ,
CLASS 2 OVER MIL-C-5541
CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400
- 2.2 MARKING: MARK UNIT AS SHOWN
(REF.: SLK-08064-82-03)

3.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

4.0 WEIGHT: 47 GRAMS MAX.

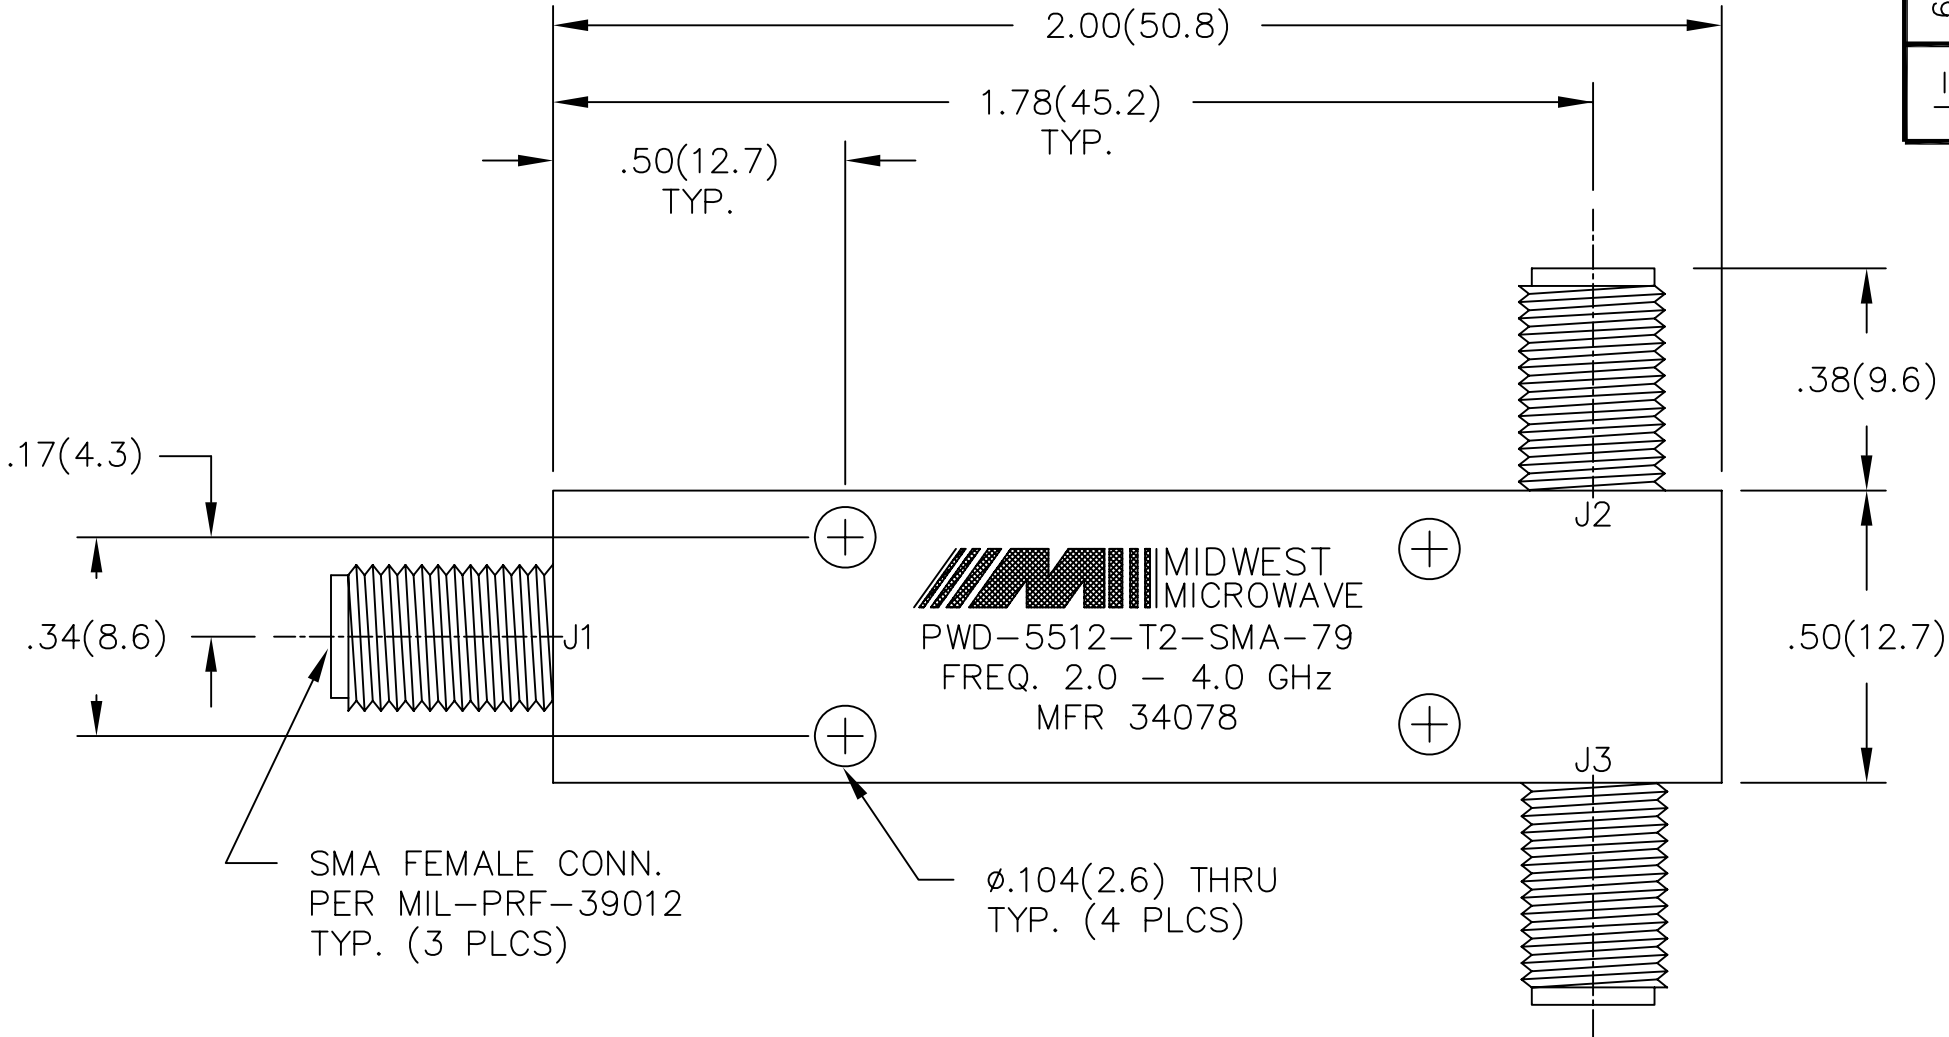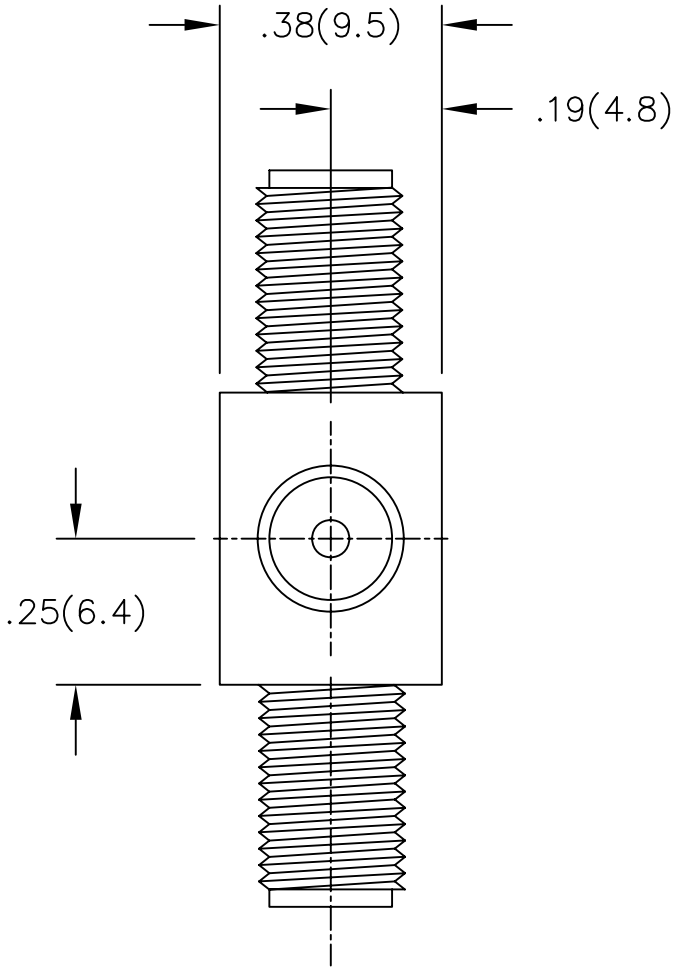

REV.	DESCRIPTION	DATE
-	RELEASED	9/26/97
-1	ADDED TITLEBLOCK	7/18/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		FSCM NO. 34078	MIDWEST MICROWAVE	
		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE POWER DIVIDER
DRAWN/DATE L.BROWN 9/26/97		ENG./DATE P.GOODMAN 9/26/97		DRAWING NUMBER PWD-5512-T2-SMA-79
CHECKED/DATE		APPROVED/DATE		SCALE: 1=1
				SHEET 1 of 1