

- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: 8.0 to 12.4 GHz1.2 INSERTION LOSS: 0.5dB1.3 ISOLATION: 20dB MIN.1.4 VSWR (MAX): 1.50:11.5 OUTPUT UNBALANCE:

1.5.1 AMPLITUDE: 0.3dB MAX.1.5.2 PHASE: 5° MAX.

1.6 MAXIMUM INPUT POWER: 3 WATTS


- 2.0 FINISH:

2.1 GREY PER MIL-E-15090 TYPE II ,

CLASS 2 OVER MIL-C-5541CLASS 3AMEETS MIL-F-14072MEETS MIL-E-5400

2.2 MARKING: MARK UNIT AS SHOWN(REF.: SLK-08062-82-02)

- 3.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.
- 4.0 WEIGHT: 23 GRAMS MAX.

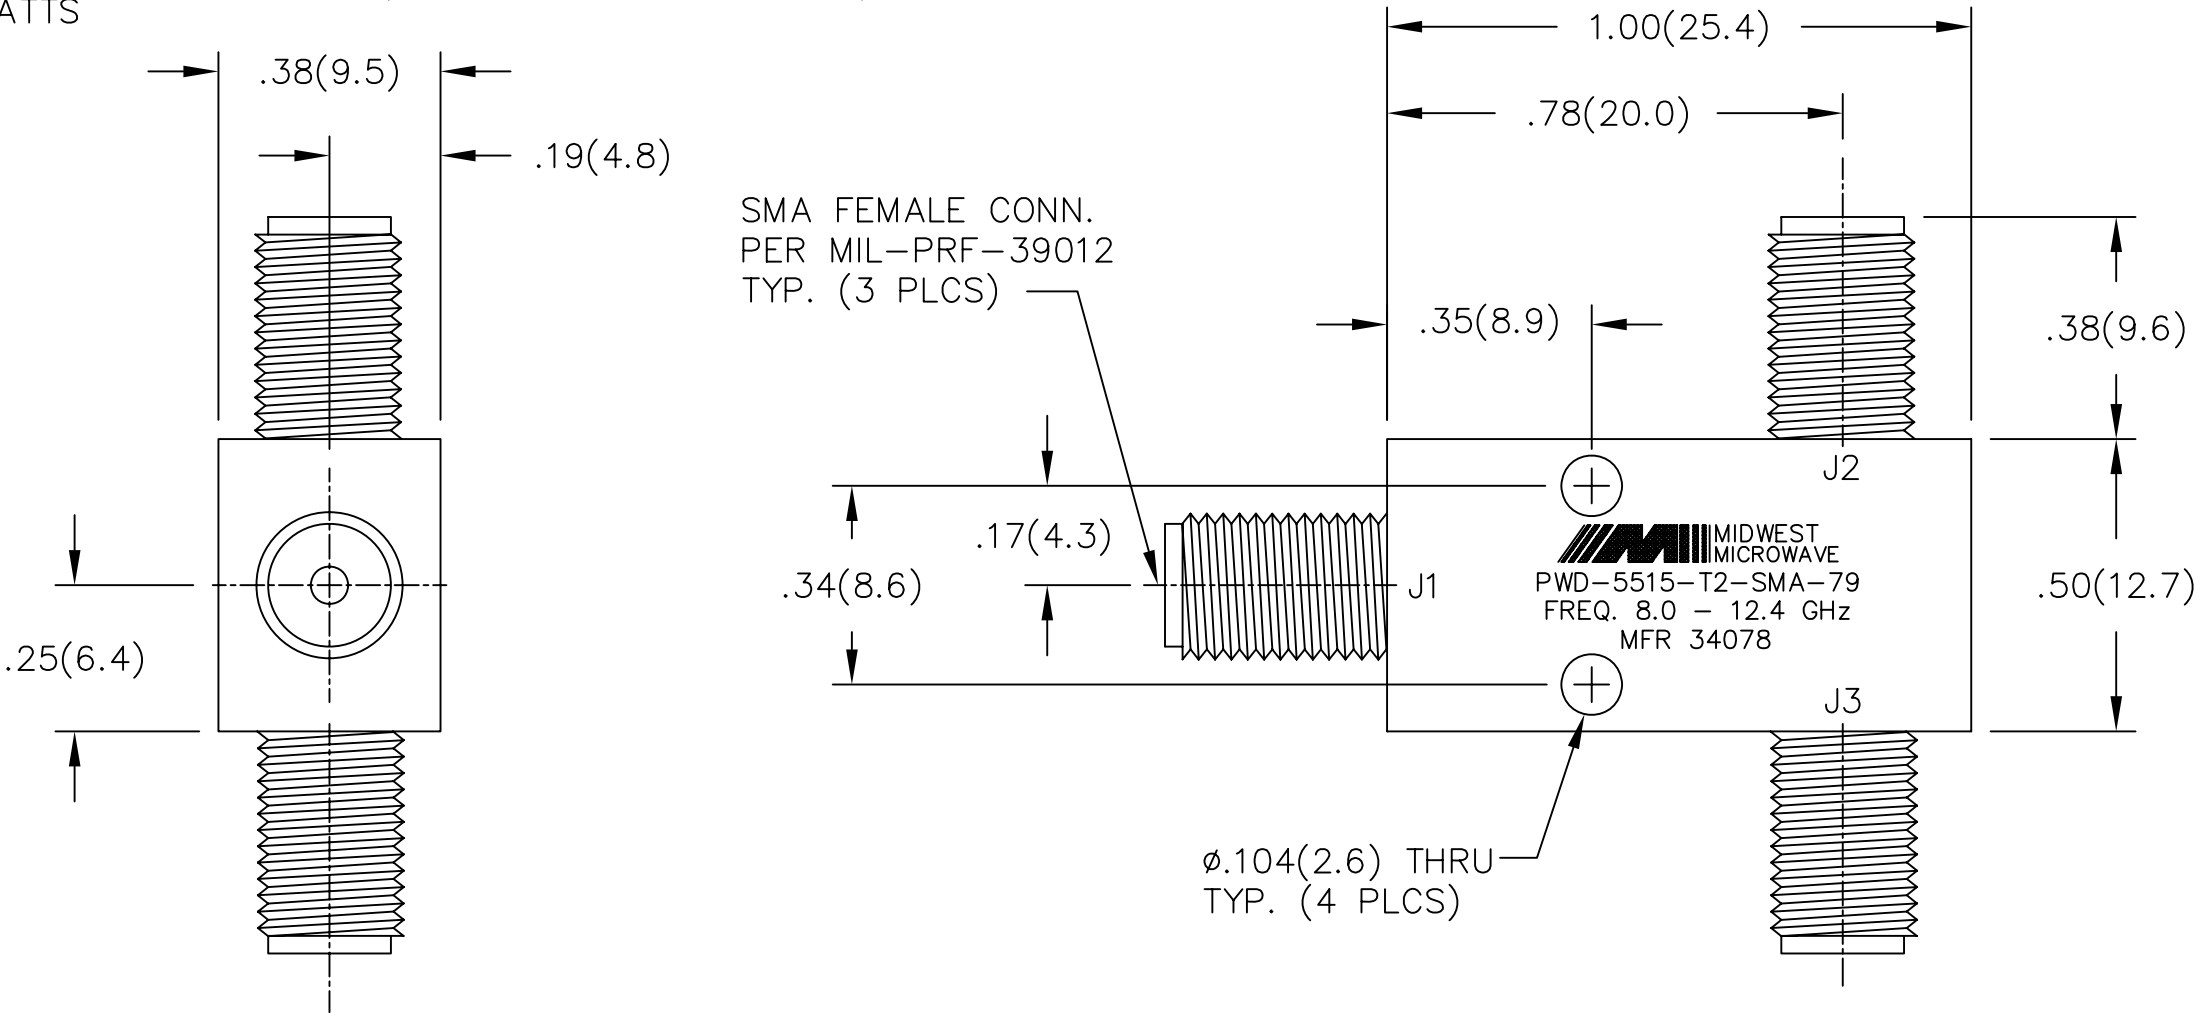

| REV. | DESCRIPTION | DATE |
|------|-------------|----------|
| - | RELEASED | 11/20/01 |

| | | | | |
|--|--|------------------------------------|----------------------------|--|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1° | FSCM NO. 34078 | | MIDWEST MICROWAVE | |
| | NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave | | TITLE POWER DIVIDER | |
| | | | | |
| | | | | |
| DRAWN/DATE L.BROWN 10/17/97 | | ENG./DATE P.GOODMAN 11/20/01 | | DRAWING NUMBER PWD-5515-T2-SMA-79 |
| CHECKED/DATE | | APPROVED/DATE | | |
| | | SCALE: 3=1 | | SHEET 1 of 1 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[PWD-5515-T2-TNC-79](#)