



Features

- Carbon element
- Red, orange, green, amber and white LED colors
- Center detent option
- Assortment of resistance tapers
- Various travel lengths
- Various lever sizes



PTL Series Slide Potentiometer w/LED

Electrical Characteristics

Standard Resistance Range	 1K ohms to 1 megohm
Standard Resistance Tolerance	...±20 %
End Resistance	
20 mm Travel	 10 ohms max.
30 mm Travel	 20 ohms max.
45 mm Travel	 20 ohms max.
60 mm Travel	 30 ohms max.
Insulation Resistance @ 250 VDC	 100 megohms min.
Dielectric Withstanding Voltage	 300 VAC
Standard Taper	 Linear, Audio
Power Rating - Linear	
20 mm Travel	 0.05 watt
30 mm Travel	 0.1 watt
45 mm Travel	 0.125 watt
60 mm Travel	 0.2 watt
Power Rating - Audio	
20 mm Travel	 0.025 watt
30 mm Travel	 0.05 watt
45 mm Travel	 0.06 watt
60 mm Travel	 0.1 watt
Slider Noise	 200 mV max.

Environmental Characteristics



Operational Life	 15,000 cycles
TR Shift	 ±15 %
Operating Temperature Range	 -10 °C to +55 °C
Resistance to Solder Heat	 ±5 %

Mechanical Characteristics


Mechanical Travel	 Length ±0.5 mm
Operating Force	 30 gf to 250 gf
Center Detent Force	 20 gf to 200 gf
Stop Strength	 5 kgf min.
Shaft Axial Force	 5 kgf min.
Shaft Wobble	 2(2 x L/20) mm p-p max.
Soldering Condition	
Manual	 300 °C ±5 °C for 3 sec.
Wave	 260 °C ±5 °C for 5 sec.
Wash	 Not recommended

Product Dimensions

20 mm Length of Travel

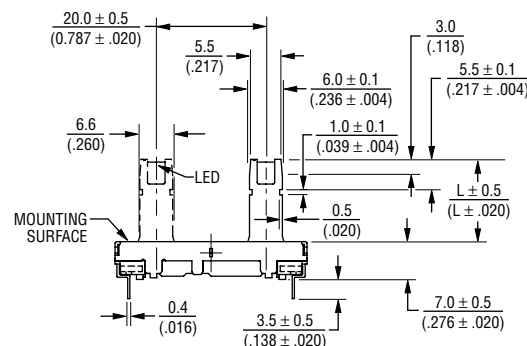


Mounting Hole Detail

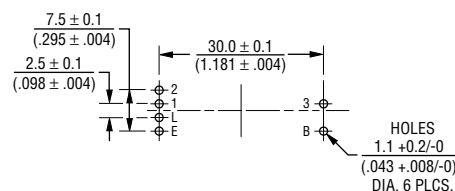

Lever Length
10.0 (.394)
15.0 (.591)
19.0 (.748)


DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$



Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

Schematic



Applications


- Mixing consoles
- Drum machines
- Keyboards and synthesizers
- Equalizers

PTL Series Slide Potentiometer w/LED


BOURNS®

Product Dimensions


30 mm Length of Travel

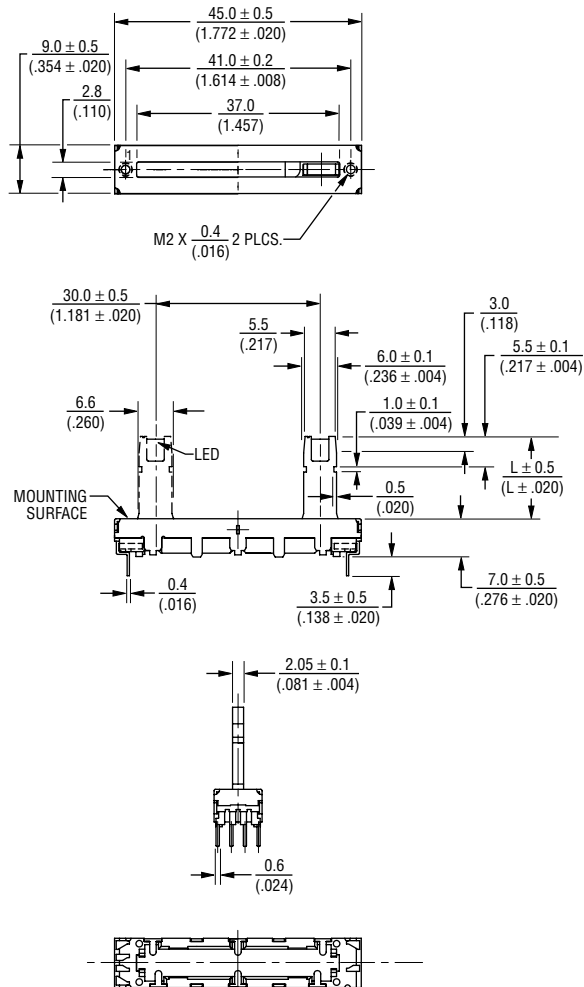


Mounting Hole Detail

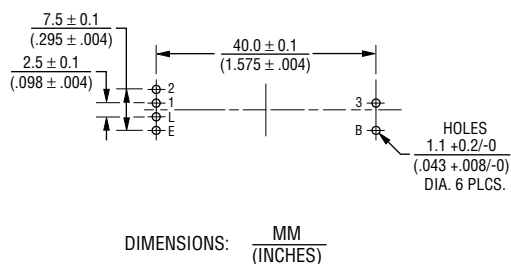

45 mm Length of Travel

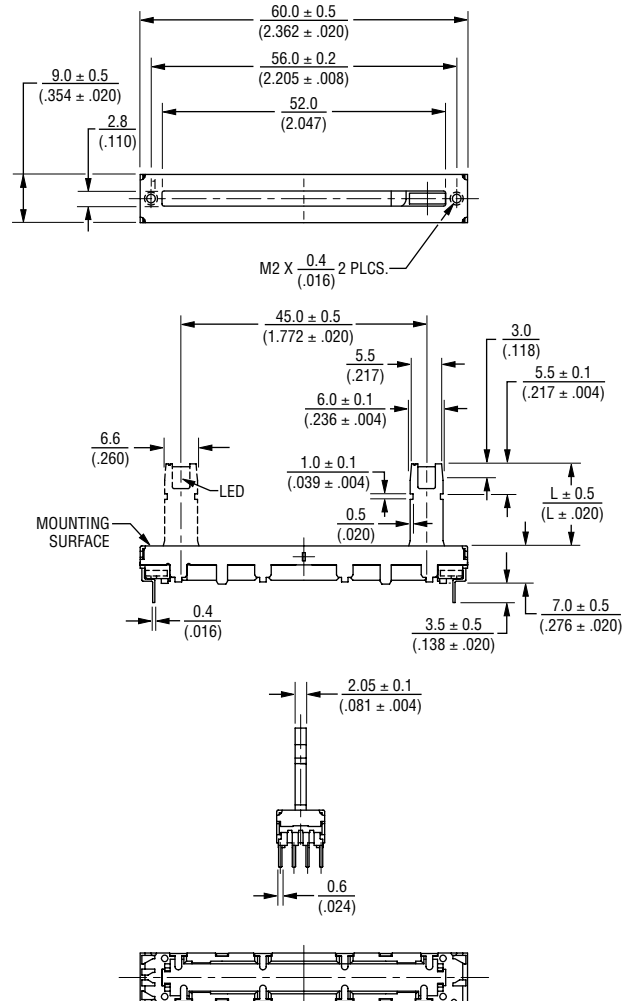

Mounting Hole Detail

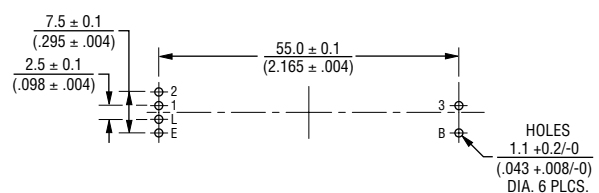

BOURNS®

Tapers

Technical drawing of the LED module showing top, side, and detail views with dimensions in mm and inches.

Top View Dimensions:

- Overall width: 75.0 ± 0.5 mm ($2.953 \pm .020$ in)
- Distance from left edge to center: 71.0 ± 0.2 mm ($2.795 \pm .008$ in)
- Distance from left edge to right edge: 67.0 mm (2.638 in)
- Distance from left edge to mounting hole center: 9.0 ± 0.5 mm ($.354 \pm .020$ in)
- Mounting hole diameter: 2.8 mm ($.110$ in)

Side View Dimensions:

- Overall height: 60.0 ± 0.5 mm ($2.362 \pm .020$ in)
- LED height: 6.6 mm ($.260$ in)
- LED width: 5.5 mm ($.217$ in)
- LED mounting hole diameter: 6.0 ± 0.1 mm ($.236 \pm .004$ in)
- LED mounting hole offset: 1.0 ± 0.1 mm ($.039 \pm .004$ in)
- LED mounting hole offset: 0.5 mm ($.020$ in)
- LED mounting hole offset: 3.5 ± 0.5 mm ($.138 \pm .020$ in)
- LED mounting hole offset: 7.0 ± 0.5 mm ($.276 \pm .020$ in)
- LED mounting hole offset: $L \pm 0.5$ mm ($L \pm .020$ in)
- LED mounting hole offset: 5.5 ± 0.1 mm ($.217 \pm .004$ in)
- LED mounting hole offset: 3.0 mm ($.118$ in)

Detail View Dimensions:

- LED mounting hole diameter: 2.05 ± 0.1 mm ($.081 \pm .004$ in)
- LED mounting hole offset: 0.6 mm ($.024$ in)

Other Labels:

- MOUNTING SURFACE
- LED
- M2 X $\frac{0.4}{(.016)}$ 2 PLCS.

Technical drawing of a mechanical part showing dimensions and hole specifications.




Dimensions:

- Top horizontal dimension: 7.5 ± 0.1 (Tolerance: $.295 \pm .004$)
- Left vertical dimension: 2.5 ± 0.1 (Tolerance: $.098 \pm .004$)
- Bottom horizontal dimension: 70.0 ± 0.1 (Tolerance: $2.756 \pm .004$)

Hole specifications:

- Holes 1, 2, and E are located on the left side.
- Holes 3 and B are located on the right side.
- General hole specification: HOLES $1.1 \pm 0.2/-0$ ($.043 \pm .008/-0$) DIA. 6 PLCS.

Dimensions: $\frac{\text{MM}}{(\text{INCHES})}$

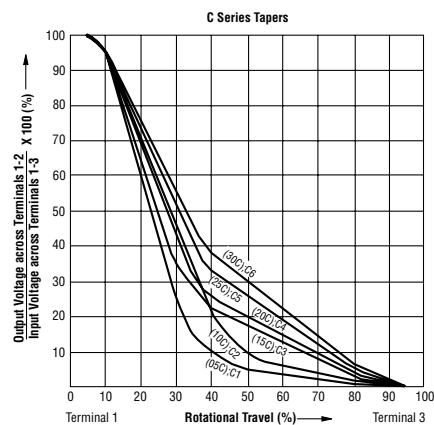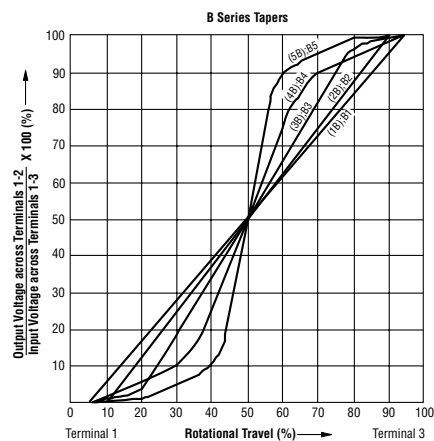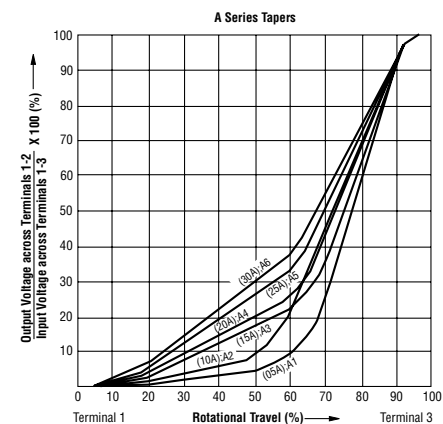

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

PTL Series Slide Potentiometer w/LED

BOURNS®

LED Characteristics


Emitter Color	Item	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Red	Forward Voltage	V_F	$I_F = 20 \text{ mA}$		2.1	2.5	V
	Luminous Intensity	I_V		0.3	0.6		mcd
	Peak Emission Wavelength	λ_p			660		nm
	Dominant Wavelength	λ_d			643		nm
	Spectral Line Half Width	$\Delta\lambda$			20		nm
Orange	Forward Voltage	V_F	$I_F = 20 \text{ mA}$		2.2	2.5	V
	Luminous Intensity	I_V		1.5	3.0		mcd
	Peak Emission Wavelength	λ_p			610		nm
	Dominant Wavelength	λ_d			605		nm
	Spectral Line Half Width	$\Delta\lambda$			35		nm
Green	Forward Voltage	V_F	$I_F = 20 \text{ mA}$		2.1	2.5	V
	Luminous Intensity	I_V		0.6	1.2		mcd
	Peak Emission Wavelength	λ_p			530		nm
	Dominant Wavelength	λ_d			35		nm
	Spectral Line Half Width	$\Delta\lambda$			160		nm
Amber	Forward Voltage	V_F	$I_F = 20 \text{ mA}$		2.1	2.6	V
	Luminous Intensity	I_V			5.0		mcd
	Peak Emission Wavelength	λ_p			585		nm
	Dominant Wavelength	λ_d		582	–	595	nm
	Spectral Line Half Width	$\Delta\lambda$			35		nm
White	Forward Voltage	V_F	$I_F = 20 \text{ mA}$		3.5	4	V
	Luminous Intensity	I_V			300.0		mcd
	Peak Emission Wavelength	λ_p			520		nm
	Dominant Wavelength	λ_d		460	–	470	nm
	Spectral Line Half Width	$\Delta\lambda$			35		nm

How To Order

PTL 30 - 10 R 0 - 103 B2

Model Number	PTL	30	-	10	R	0	-	103	B2
Designator	PTL = Slide Potentiometer w/LED								
Length of Travel	20 = 20 mm 30 = 30 mm	45 = 45 mm 60 = 60 mm							
Lever Length	10 = 10 mm 15 = 15 mm 19 = 19 mm								
LED Color	R = Red O = Orange G = Green	A = Amber W = White							
Detent Option	0 = No Detent 1 = Center Detent								
Resistance Code	(See Standard Resistance Table)								
Resistance Taper	(See Taper Charts)								
	Taper Series followed by Curve Number								

Circuit

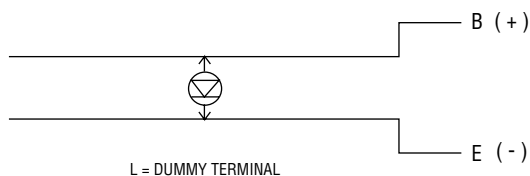

REV. 09/11

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[PTL45-15R0-202B2](#) [PTL60-10R0-203B2](#) [PTL30-10G1-204B2](#) [PTL20-10G1-204B2](#) [PTL60-10O0-105B2](#) [PTL60-10O1-105B2](#) [PTL20-10G0-204B2](#) [PTL30-10G0-204B2](#) [PTL45-15R1-202B2](#) [PTL60-10R1-203B2](#) [PTL45-19O1-105B2](#) [PTL20-19G1-102B2](#) [PTL30-15O1-104B2](#) [PTL20-15O1-104B2](#) [PTL30-19G1-102B2](#) [PTL60-15G0-202B2](#) [PTL60-15G1-202B2](#) [PTL45-19O0-105B2](#) [PTL20-15O0-104B2](#) [PTL30-19G0-102B2](#) [PTL20-19G0-102B2](#) [PTL30-15O0-104B2](#) [PTL30-15R1-103B2](#) [PTL30-15G0-104B2](#) [PTL20-15R1-103B2](#) [PTL20-15G0-104B2](#) [PTL45-10R0-105B2](#) [PTL20-10O0-204B2](#) [PTL30-10O0-204B2](#) [PTL45-19G0-105B2](#) [PTL20-15R0-103B2](#) [PTL30-10O1-204B2](#) [PTL45-19G1-105B2](#) [PTL20-10O1-204B2](#) [PTL30-15R0-103B2](#) [PTL30-15G1-104B2](#) [PTL20-15G1-104B2](#) [PTL45-10R1-105B2](#) [PTL20-19R0-104B2](#) [PTL60-15O1-202B2](#) [PTL30-19R0-104B2](#) [PTL30-19O0-102B2](#) [PTL20-19O0-102B2](#) [PTL60-10G0-105B2](#) [PTL20-19O1-102B2](#) [PTL60-10G1-105B2](#) [PTL30-19O1-102B2](#) [PTL60-15O0-202B2](#) [PTL20-19R1-104B2](#) [PTL30-19R1-104B2](#) [PTL20-15R0-202B2](#) [PTL20-19R0-502B2](#) [PTL30-10R1-503B2](#) [PTL20-10R1-503B2](#) [PTL30-15R0-202B2](#) [PTL30-19R0-502B2](#) [PTL45-19R0-203B2](#) [PTL20-10R0-503B2](#) [PTL30-10R0-503B2](#) [PTL45-19R1-203B2](#) [PTL20-15R1-202B2](#) [PTL20-19R1-502B2](#) [PTL30-15R1-202B2](#) [PTL30-19R1-502B2](#) [PTL45-19G1-503B2](#) [PTL60-19G0-203B2](#) [PTL30-15G1-502B2](#) [PTL20-15G1-502B2](#) [PTL45-10O1-103B2](#) [PTL45-10G0-504B2](#) [PTL45-10G1-504B2](#) [PTL45-19G0-503B2](#) [PTL20-15G0-502B2](#) [PTL45-10O0-103B2](#) [PTL30-15G0-502B2](#) [PTL60-19G1-203B2](#) [PTL45-10G0-103B2](#) [PTL45-10G1-103B2](#) [PTL30-15R0-504B2](#) [PTL45-10O1-504B2](#) [PTL20-15R0-504B2](#) [PTL45-19O0-503B2](#) [PTL20-15O0-502B2](#) [PTL30-10R0-102B2](#) [PTL20-10R0-102B2](#) [PTL30-15O0-502B2](#) [PTL60-19O1-203B2](#) [PTL20-10R1-102B2](#) [PTL30-15O1-502B2](#) [PTL20-15O1-502B2](#) [PTL30-10R1-102B2](#) [PTL45-10O0-504B2](#) [PTL30-15R1-504B2](#) [PTL60-19O0-203B2](#) [PTL20-15R1-504B2](#) [PTL45-19O1-503B2](#) [PTL45-10G1-203B2](#) [PTL60-15O1-102B2](#) [PTL60-15G0-503B2](#) [PTL45-10G0-203B2](#)