
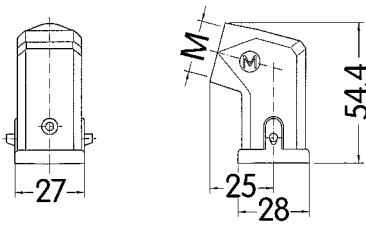

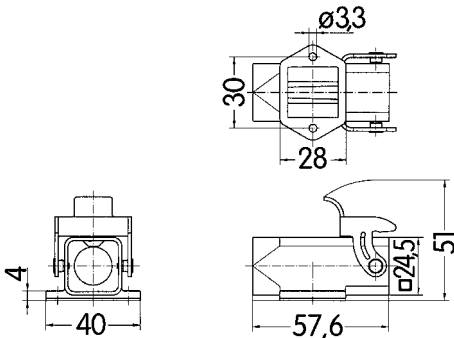

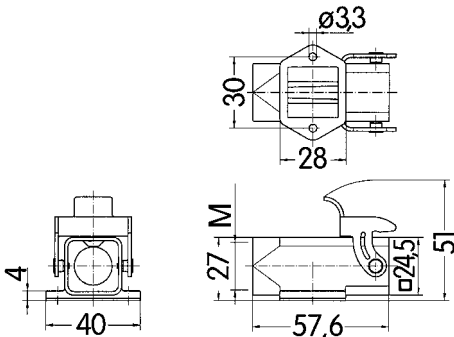

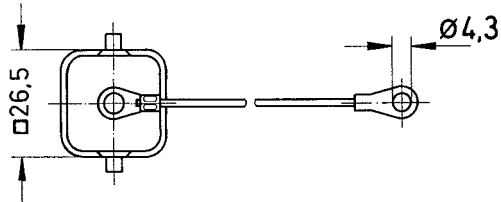

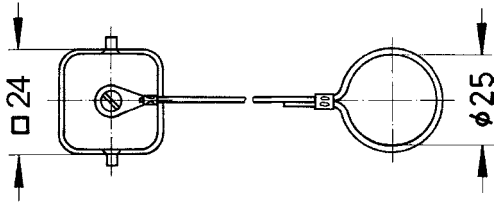


Identification	Part-Number	M	Drawing	Dimensions in mm
Hood side entry with glued seal 	19 44 003 1640 19 44 003 1643	20 20		
Bulkhead mounted housing 	19 44 003 0801	—		
Surface mounted housing side entry 	19 44 003 1250	20		
Cover for housings 	19 44 003 5426 ²⁾ 19 44 003 5425 ¹⁾	—		
Cover for hoods 	19 44 003 5422 ²⁾ 19 44 003 5421 ¹⁾	—		

²⁾ for mounted female insert
¹⁾ or mounted male insert



Stainless steel hoods and housings

Features

- Hoods and housings as well as locking elements out of stainless steel
- Resistant against aggressive detergents
- Fields of application
 - Food and beverage industry
 - Water and sewage industry
 - Pharmaceutical industry
 - Chemical industry
 - Offshore and shipbuilding
- Suitable for all standard inserts that fit into size Han® 3 A

Technical characteristics

Material	Stainless steel
Seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Protection degree acc. to DIN EN 60 529 in locked position	IP 44 IP 65 / IP 67 with use of sealing screw 09 20 000 9918
Locking lever	Stainless steel

Identification	Part-Number	M	Drawing	Dimensions in mm
----------------	-------------	---	---------	------------------



Hood

top entry
with glued seal



19 44 003 1440
19 44 003 1443

20
20





Bulkhead mounted housing

with 1 metal locking lever



19 44 003 0301

—



HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | D-32339 Espelkamp

Fon: +49 57 72 47-97100 | Fax: +49 57 72 47-124

Internet: www.HARTING.com | E-Mail: HARTING.Electric@HARTING.com

2010-03-15

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[19440031640](#) [19440035425](#) [19440030801](#) [19440035422](#) [19440031250](#) [19440035421](#) [19440031643](#)
[19440035426](#)