



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	00		M	EC 0G3C 0734 04	16DEC04	BSV

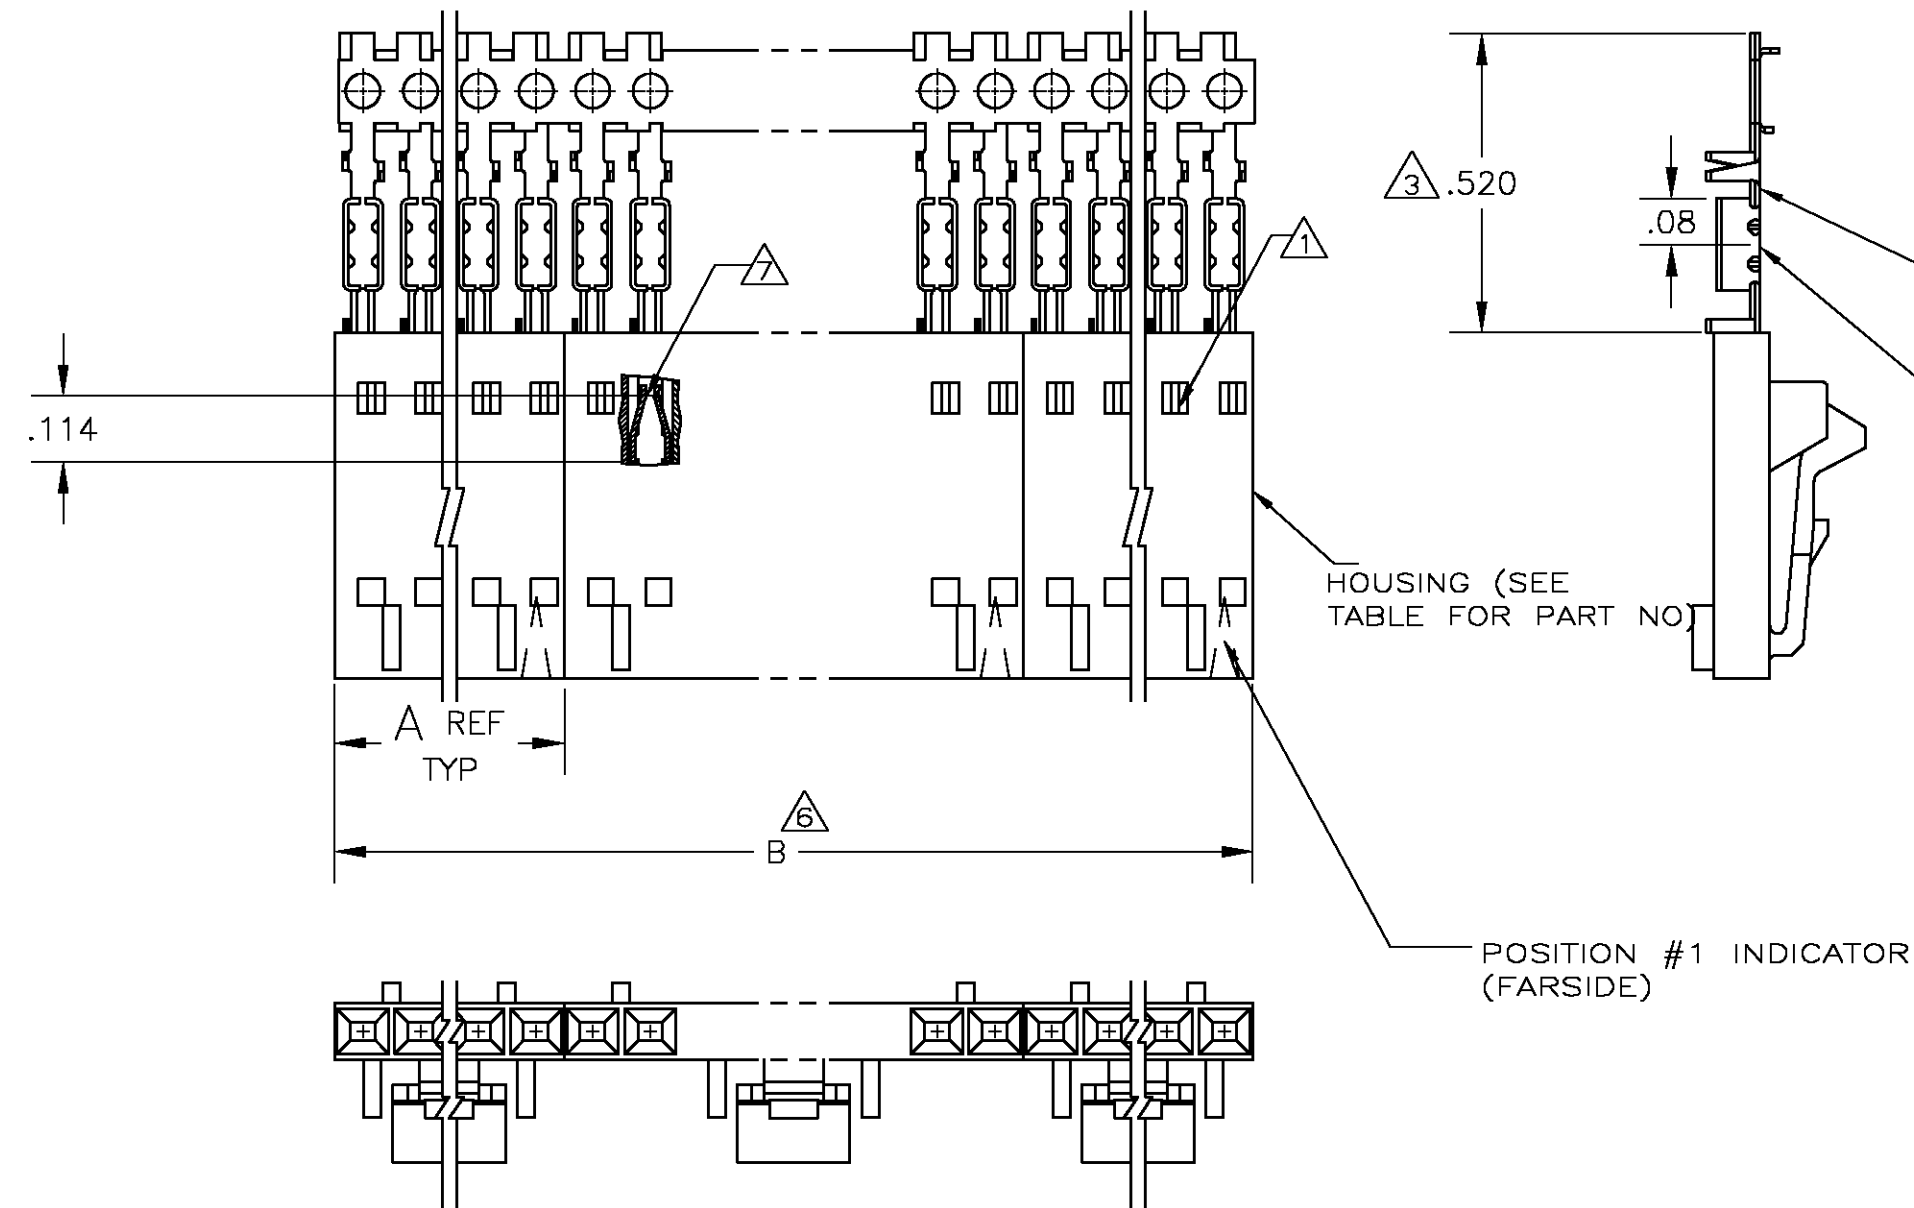

CONTACT IDENTIFICATION
LETTER "A" (LOCATED
IN THIS AREA)

HOUSING (SEE
TABLE FOR PART NO.)

POSITION #1 INDICATOR
(FAR SIDE)

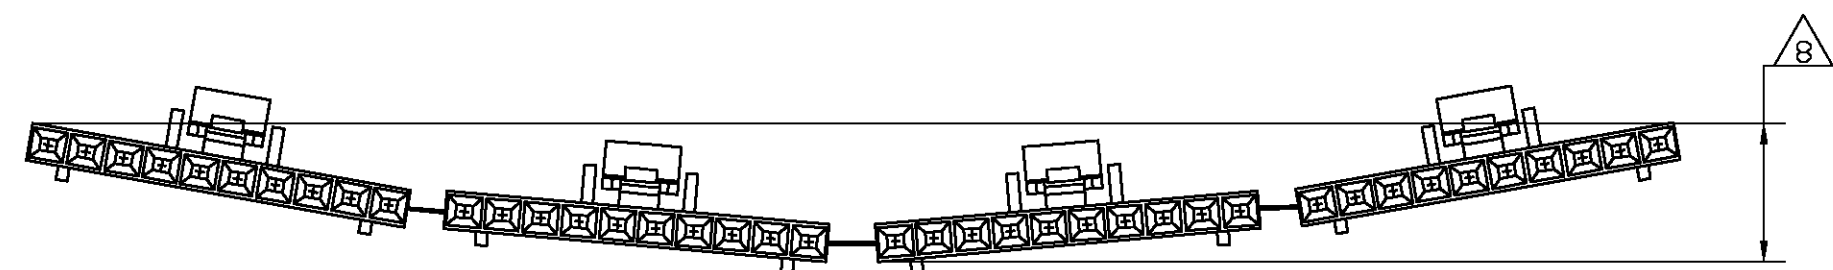

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS.
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS.
- 3 THE DIMENSION APPLIES WITH THE FORWARD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103640
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000015 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 .000015 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 .000015 GOLD IN THE CONTACT AREA. .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.

12	2	2.40	1.198	1-104257-1	12	6-103960-1
12	2	2.20	1.098	1-104257-0	11	6-103960-0
12	2	2.00	.998	104257-9	10	5-103960-9
12	2	1.80	.898	104257-8	9	5-103960-8
12	2	1.60	.798	104257-7	8	5-103960-7
12	2	1.40	.698	104257-6	7	5-103960-6
12	4	2.39	.598	104257-5	6	5-103960-5
12	4	1.99	.498	104257-4	5	5-103960-4
12	5	1.99	.398	104257-3	4	5-103960-3
12	8	2.40	.298	104257-2	3	5-103960-2
12	10	2.00	.198	104257-1	2	5-103960-1
11	10	2.00	.198	104257-1	2	5-103960-1
9	5	1.99	.398	104257-3	4	1-103960-2
9	2	2.40	1.198	1-104257-1	12	1-103960-1
9	2	2.20	1.098	1-104257-0	11	1-103960-0
9	2	2.00	.998	104257-9	10	103960-9
9	2	1.80	.898	104257-8	9	103960-8
9	2	1.60	.798	104257-7	8	103960-7
9	2	1.40	.698	104257-6	7	103960-6
9	4	2.39	.598	104257-5	6	103960-5
9	4	1.99	.498	104257-4	5	103960-4
9	5	1.99	.398	104257-3	4	103960-3
9	8	2.40	.298	104257-2	3	103960-2
9	10	2.00	.198	104257-1	2	103960-1
PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L A MAYER 11-4-86	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS: INCHES		CHK P de JONG 11-4-86				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P de JONG 11-4-86	NAME			
0 PLC ± -		PRODUCT SPEC	RCPT ASSY, AMPMODU MTE, SINGLE			
1 PLC ± -		108-25034	ROW, .100 C/L, LATCHED & POLARIZED			
2 PLC ± -		APPLICATION SPEC	FOR #26-#30 AWG WIRE SIZE, STRIP FORM			
3 PLC ± -		114-25026	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
4 PLC ± -		WEIGHT	A2	00779	C=103960	-
ANGLES ± -		CUSTOMER DRAWING	SCALE	3:1	SHEET	1 OF 1
FINISH		SEE TABLE	REV	M		