


RS ITEM NO 209-995



|                  |                      |                          |                                   |           |              |
|------------------|----------------------|--------------------------|-----------------------------------|-----------|--------------|
| LED/Multiled     | <i>Multi LED</i>     | Optimum voltage (V)      | <i>24Vdc</i>                      | Intensity | <i>45mcd</i> |
| Mounting Size    | -                    | Rectifier                | -                                 |           |              |
| Mounting Finish  | <i>Midget Flange</i> | AC current               | -                                 |           |              |
| Protection       | -                    | DC current               | <i>15mA</i>                       |           |              |
| Mount Holder     | -                    | Voltage Tolerance(%)     | <i>10%</i>                        |           |              |
| Chip Qty         | -                    | Optimum temperature (°C) | <i>-25°C...+60°C</i>              |           |              |
| Indicator colour | <i>Yellow</i>        | Storage temperature (°C) | <i>-25°C...+60°C</i>              |           |              |
| Wavelength (nm)  | <i>585</i>           | Contact Tab              | <i>Midget Flange<br/>Base Cap</i> |           |              |

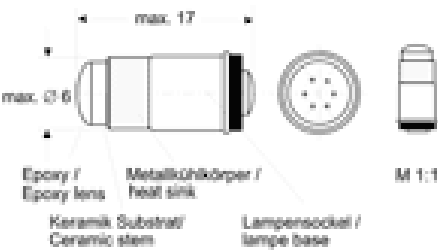

Dimension in mm (typical), not to scale.  
We reserve the right to make changes without further notice to this product to improve reliability, function or design