

Features

- PLL clock distribution optimized for DDR2-667/533/400 SDRAM applications.
- Distributes one differential clock input pair to eleven differential clock output pairs.
- Differential Inputs (CLK, $\overline{\text{CLK}}$) and (FBIN, $\overline{\text{FBIN}}$)
- Input OE/OS: LVCMS
- Differential Outputs (Y[0:9], $\overline{\text{Y}[0:9]}$ and (FBOUT, $\overline{\text{FBOUT}}$)
- External feedback pins (FBIN, FBIN) are used to synchronize the outputs to the clock input.
- Operates at $\text{AVDD} = 1.8\text{V}$ for core circuit and internal PLL, and $\text{VDDQ} = 1.8\text{V}$ for differential output drivers
- Packaging (Pb-free & Green):
 - 52-ball VFBGA (NF)
- PI6CU877 for DDR2-533/400 applications
- PI6CUA877 for DDR2-667/533/400 applications

Pin Configuration

	1	2	3	4	5	6
A	Y ₁	Y ₀	$\overline{\text{Y}_0}$	$\overline{\text{Y}_5}$	Y ₅	Y ₆
B	$\overline{\text{Y}_1}$	GND	GND	GND	GND	$\overline{\text{Y}_6}$
C	$\overline{\text{Y}_2}$	GND	NB	NB	GND	$\overline{\text{Y}_7}$
D	Y ₂	V _{DDQ}	V _{DDQ}	V _{DDQ}	OS	Y ₇
E	CK	V _{DDQ}	NB	NB	V _{DDQ}	FBIN
F	$\overline{\text{CK}}$	V _{DDQ}	NB	NB	OE	$\overline{\text{FBIN}}$
G	AGND	V _{DDQ}	V _{DDQ}	V _{DDQ}	V _{DDQ}	$\overline{\text{FBOUT}}$
H	AV _{DD}	GND	NB	NB	GND	FBOUT
J	Y ₃	GND	GND	GND	GND	Y ₈
k	$\overline{\text{Y}_3}$	$\overline{\text{Y}_4}$	Y ₄	Y ₉	$\overline{\text{Y}_9}$	$\overline{\text{Y}_8}$

Description


PI6CU877 is a PLL clock driver family, consisting of PI6CU877, and PI6CUA877, developed for Registered DDR2 DIMM applications with 1.8V operation and differential clock input and output levels.

The device is a zero delay buffer that distributes a differential clock input pair (CLK, $\overline{\text{CLK}}$) to eleven differential pairs of clock outputs which includes feedback clock (Y[0:9], $\overline{\text{Y}[0:9]}$; FBOUT, $\overline{\text{FBOUT}}$).

The clock outputs are controlled by CLK/ $\overline{\text{CLK}}$, FBOUT, $\overline{\text{FBOUT}}$, the LVCMS inputs (OE, OS) and the Analog Power input (AVDD). When OE is LOW the outputs except FBOUT, $\overline{\text{FBOUT}}$, are disabled while the internal PLL continues to maintain its locked-in frequency. OS is a pin that must be tied to GND or VDD. When OS is high, OE will function as described above. When OS is LOW, OE has no effect on Y7/Y₇, they are free running. When AVDD is grounded, the PLL is turned off and bypassed for test purposes.

When CLK/ $\overline{\text{CLK}}$ are logic low, the device will enter a low power mode. An input logic detection circuit will detect the logic low level and perform a low power state where all Y[0:9], $\overline{\text{Y}[0:9]}$; FBOUT, $\overline{\text{FBOUT}}$, and PLL are OFF.

PI6CUx877 is a high-performance, low skew, and low jitter PLL clock driver, and it is also able to track Spread Spectrum Clocking (SSC) for reduced EMI.

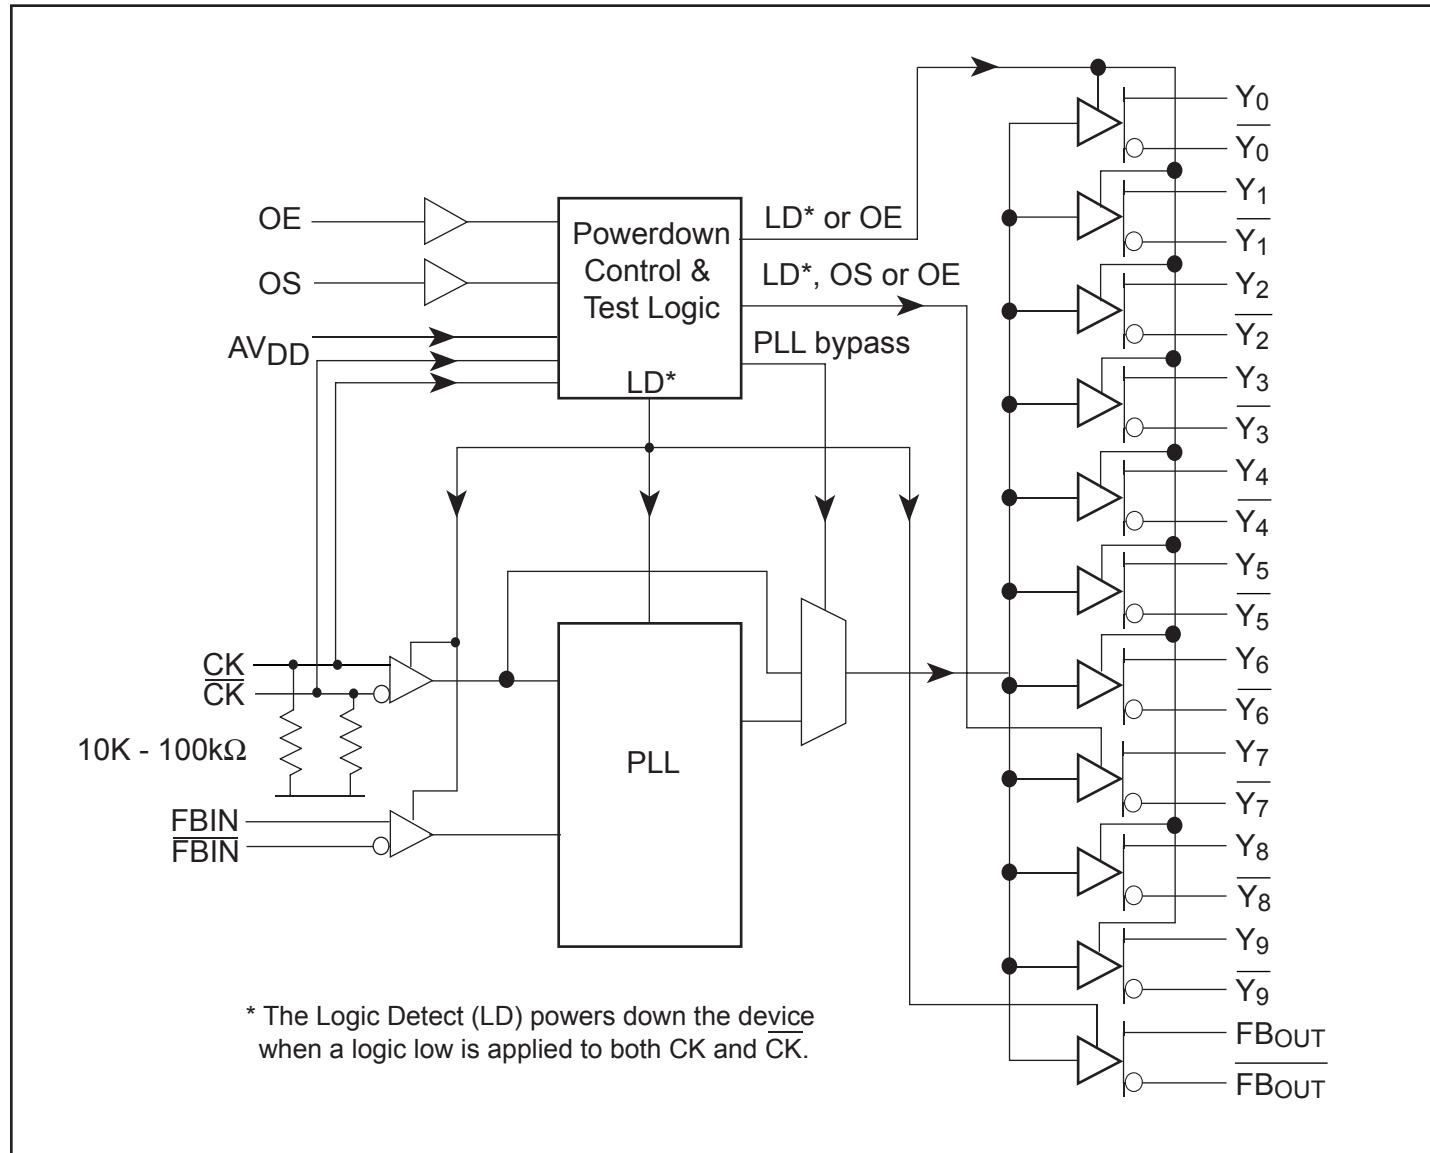Block Diagram


Pinout Table

Pin Name	Characteristics	Description
AGND	Ground	Analog ground
AV _{DD}	1.8V nominal	Analog power
CK	Differential Input	Clock input with a (10k - 100kΩ) pulldown resistor
<u>CK</u>	Differential Input	Complementary clock input with a (10k - 100kΩ) pulldown resistor
FB _{IN}	Differential Input	Feedback clock input
<u>FB_{IN}</u>	Differential Input	Complementary feedback clock input
FB _{OUT}	Differential Output	Feedback clock output
<u>FB_{OUT}</u>	Differential Output	Complementary feedback clock output
OE	LVCMS input	Output enable (async.)
OS	LVCMS input	Output select (tied to GND or V _{DDQ})
GND	Ground	Ground
V _{DDQ}	1.8V nominal	Logic and output power
Y[0:9]	Differential Outputs	Clock outputs
<u>Y[0:9]</u>	Differential Outputs	Complementary clock outputs
NB		No Ball

Function Table

Inputs					Outputs				PLL State
AV _{DD}	OE	OS	CK	<u>CK</u>	Y	<u>Y</u>	FB _{OUT}	<u>FB_{OUT}</u>	
GND	H	X	L	H	L	H	L	H	Bypass/Off
GND	H	X	H	L	H	L	H	L	Bypass/Off
GND	L	H	L	H	L(Z) ⁽¹⁾	L(Z) ⁽¹⁾	L	H	Bypass/Off
GND	L	L	H	L	L(Z) ⁽¹⁾ , Y7 active	<u>L(Z)⁽¹⁾, Y7 active</u>	H	L	Bypass/Off
Nom. V _{DD}	L	H	L	H	L(Z) ⁽¹⁾	L(Z) ⁽¹⁾	L	H	On
Nom. V _{DD}	L	L	H	L	L(Z) ⁽¹⁾ , Y7 active	<u>L(Z)⁽¹⁾, Y7 active</u>	H	L	On
Nom. V _{DD}	H	X	L	H	L	H	L	H	On
Nom. V _{DD}	H	X	H	L	H	L	H	L	On
Nom. V _{DD}	X	X	L	L	L(Z) ⁽¹⁾	L(Z) ⁽¹⁾	L(Z) ⁽¹⁾	L(Z) ⁽¹⁾	Off
Nom. V _{DD}	X	X	H	H	Reserved				

Notes:

1. L_(Z) means the outputs are disabled to a low state meeting the I_{ODL} limit on DC Specification

Absolute Maximum Ratings (Over operating free-air temperature range)

Symbol	Parameter	Min.	Max.	Units
V _{DDQ} , AV _{DD}	I/O supply voltage range and analog /core supply voltage range	-0.5	2.5	V
V _I	Input voltage range	-0.5	V _{DDQ} +0.5	
V _O	Output voltage range	-0.5	V _{DDQ} +0.5	
I _{IK}	Input clamp current	-50	50	mA
I _{OK}	Output clamp current	-50	50	
I _O	Continuous output current, V _O = 0 to V _{DDQ}	-50	50	
I _{O(PWR)}	Continuous current through each V _{DDQ} or GND	-100	100	
T _{STG}	Storage temperature	-65	150	°C

Note:

1. Stress beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

DC Specifications Recommended Operating Conditions

Symbol	Parameter		Min.	Nom.	Max.	Units
V _{DDQ}	Output Supply Voltage		1.7	1.8	1.9	V
AV _{DD}	Supply voltage ⁽¹⁾			V _{DDQ}		
V _{IL}	Low-level input voltage ⁽²⁾				0.35 x V _{DDQ}	
V _{IH}	High-level input voltage ⁽²⁾		0.65 x V _{DDQ}			mA
I _{OH}	High-level output current, see Fig 2				-9	
I _{OL}	Low-level output current, see Fig. 2				9	
V _{IX}	Input differential-pair crossing voltage		(V _{DDQ} /2) -0.15		(V _{DDQ} /2) -0.15	
V _{IN}	Input voltage level		-0.3		V _{DDQ} +0.3	V
V _{ID}	Input differential voltage, See Fig 9 (2)	DC	0.3		V _{DDQ} +0.4	
		AC	0.6		V _{DDQ} +0.4	
T _A	Operating free air temperature		0		70	°C

Notes:

1. The PLL is turned off and bypassed for test purposes when AV_{DD} is grounded. During this test mode, V_{DDQ} remains within the recommended operating conditions and no timing parameters are guaranteed.
2. V_{ID} is the magnitude of the difference between the input level on CK and the input level on $\overline{\text{CK}}$, see Figure 9 for definition. The CK and $\overline{\text{CK}}$, V_{IH} and V_{IL} limits are used to define the DC low and high levels for the logic detect state.

FCK Clock Frequency Specifications (AV_{DD}, V_{DDQ} = 1.8 ±0.1V)

PI6CUx877 Part Number	Operating Clock Frequency ^(1,2)		Application Clock Frequency ^(1,3)		Units
	Min	Max	Min	Max	
PI6CU877	125	300	160	270	MHz
PI6CUA877	125	410	160	360	MHz

Notes:

1. The PLL is able to handle spread spectrum induced skew.
2. Operating clock frequency indicates a range over which the PLL is able to lock, but in which it is not required to meet the other timing parameters. (Used for low-speed debug or production testing of DIMM modules).
3. Application clock frequency indicates a range over which the PLL must meet all timing parameters.

Timing Requirements (Over recommended operating free-air temperature)

Symbol	Description	AV _{DD} , V _{DDQ} = 1.8V ±0.1V1		Units
		Min	Max	
t _{DC}	Input clock duty cycle	40	60	%
t _L	Stabilization time ⁽¹⁾		15	μs

1. Stabilization time is the time required for the integrated PLL circuit to obtain phase lock of its feedback signal to its reference signal after power up. During normal operation, the stabilization time is also the time required for the integrated PLL circuit to obtain phase lock of its feedback signal to its reference signal when CK and CK go to a logic low state, enter the power-down mode and later return to active operation. CK and CK maybe left floating after they have been driven low for one complete clock cycle.

DC Specifications

Param- eter	Description	Test Condition	AV _{DD} , V _{DDQ}	Min.	Typ.	Max.	Units
V _{IK}	All Inputs	I _I = -18mA	1.7V			1.2	V
V _{OH}	HIGH output voltage	I _{OH} = -100µA	1.7 to 1.9V	V _{DDQ} -0.2			
		I _{OH} = -9mA	1.7	1.1			
I _{ODL}	Output disabled low current	OE = L, V _{ODL} = 100mV	1.7V	100			µA
V _{OD}	Output differential voltage, the magnitude of the difference between the true and complimentary outputs, see fig. 9 for more details			0.6			V
I _I	CK, \overline{CK}	V _I = V _{DDQ} or GND	1.9V			±250	µA
	OE, OS, FB _{IN} , $\overline{FB_{IN}}$	V _I = V _{DDQ} or GND				±10	
I _{DDLD}	Static Supple current, I _{DDQ} + I _{ADD}	CK and $\overline{CK} = L$				500	mA
I _{DD}	Dynamic supply current, I _{DDQ} + I _{ADD} , see note 6 for CPD calculation	CK and $\overline{CK} = 360MHz$, all outputs are open (not connected to a PCB)				300	
C _I	CK, \overline{CK}	V _I = V _{DDQ} or GND	1.8V	2		3	pF
	FB _{IN} , $\overline{FB_{IN}}$	V _I = V _{DDQ} or GND		2		3	
C _{I(Δ)}	CK, \overline{CK}	V _I = V _{DDQ} or GND				0.25	
	FB _{IN} , $\overline{FB_{IN}}$	V _I = V _{DDQ} or GND				0.25	

Notes:

6. Total I_{DD} = I_{DDQ} + I_{ADD} = F_{CK} *C_{PD} *V_{DDQ}, solving for C_{PD} = (I_{DDQ} + I_{ADD})/(F_{CK}*V_{DDQ}) where F_{CK} is the input frequency, V_{DDQ} is the power supply and C_{PD} is the Power Dissipation Capacitance.

AC Specifications

Switching characteristics over recommended operating free-air temperature range (unless otherwise noted)⁽¹⁵⁾

Parameter	Description	Diagram	AV _{DD} , V _{DDQ} = 1.8 ±0.1V			Units
			Min.	Nom.	Max.	
ten	OE to and Y/Y	see Fig 11			8	ns
tdis	OE to and Y/Y	see Fig 11			8	
tjit(cc+)	Cycle-to-cycle jitter	see Fig 4	0		40	ps
tjit(cc-)			0		-40	
t(Ø)	Static phase offset ⁽¹¹⁾	see Fig 5	-50		50	
t(Ø)dyn	Dynamic phase offset	see Fig 10	-50		50	
tsk(o)	Output clock skew	see Fig 6			40	
tjit(per)	Period jitter ⁽¹²⁾	see Fig 7	-40		40	
tjit(hper)	Half period jitter ⁽¹²⁾ 160 to 270 MHz	see Fig 8	-75		75	
	Half period jitter ⁽¹²⁾ 271 to 360 MHz	see Fig 8	-50		50	
slr(i)	Input clock slew rate	see Fig 9	1	2.5	4	V/ns
	Output enable (OE)	see Fig 9	0.5			
slr(o)	Output clock slew rate ^(14, 16)	see Fig 1, 9	1.5	2.5	3	
VOX	Outpu differential-pair cross voltage ⁽¹³⁾	see Fig 2	(V _{DDQ} /2) -0.1		(V _{DDQ} /2) +0.1	V

The PLL on the PI6CUx877 is capable of meeting all the above test parameters while supporting SSC synthesizers with the following parameters:

SSC modulation frequency	30.00		33	kHz
SSC clock input frequency deviation	0.00		-0.50	%
PI6CUx877 PLL design should target the values below to minimize the SCC induced skew:				
PLL Loop Bandwidth	2.0			MHz

Notes:

11. Static Phase Offset does not include Jitter
12. Period Jitter and Half-Period Jitter specifications are separate specifications that must be met independently of each other.
13. VOX specified at the DRAM clock input or the test load.
14. To eliminate the impact of input slew rates on static phase offset, the input slew rates of Reference Clock Input CK, CK and Feedback Clock Input FBIN, FBIN are recommended to be nearly equal. The 2.5V/ns slew rates are shown as a recommended target. Compliance with these nominal values is not mandatory if it can be adequately demonstrated that alternative characteristics meet the requirements of the registered DDR2 DIMM application.
15. There are two terminations that are used with the above ac tests. The load/board in Figure 2 is used to measure the input and output differential-pair cross-voltage only. The load/board in Figure 3 is used to measure all other tests. For consistency, equal length cables should be used.
16. The Output slew rate is determined from IBIS model load shown in Figure1. It is measured single-ended.

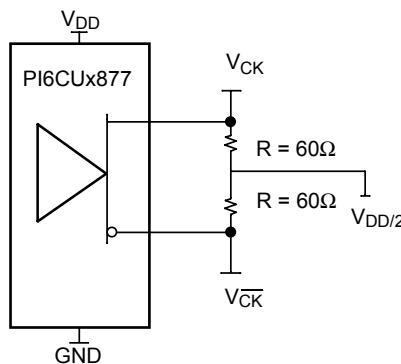


Figure 1. IBIS Model Output Load

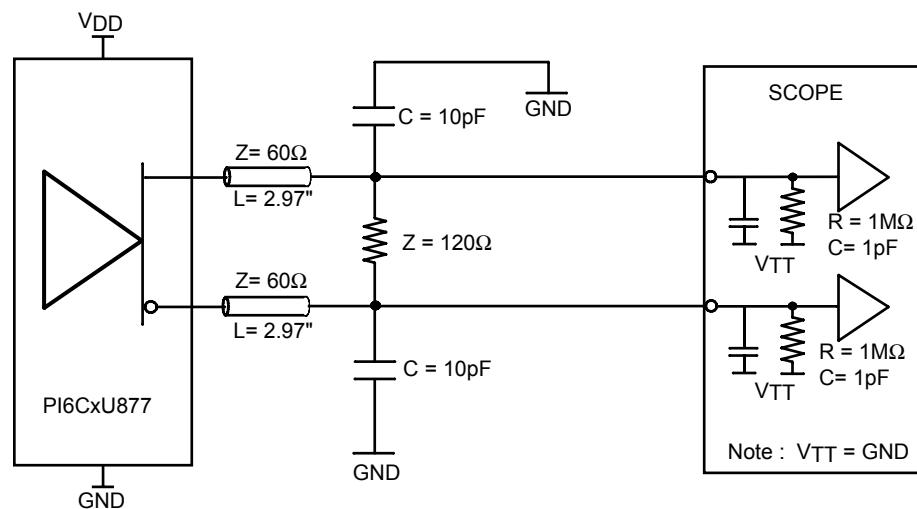


Figure 2. Output Load Test Circuit 1

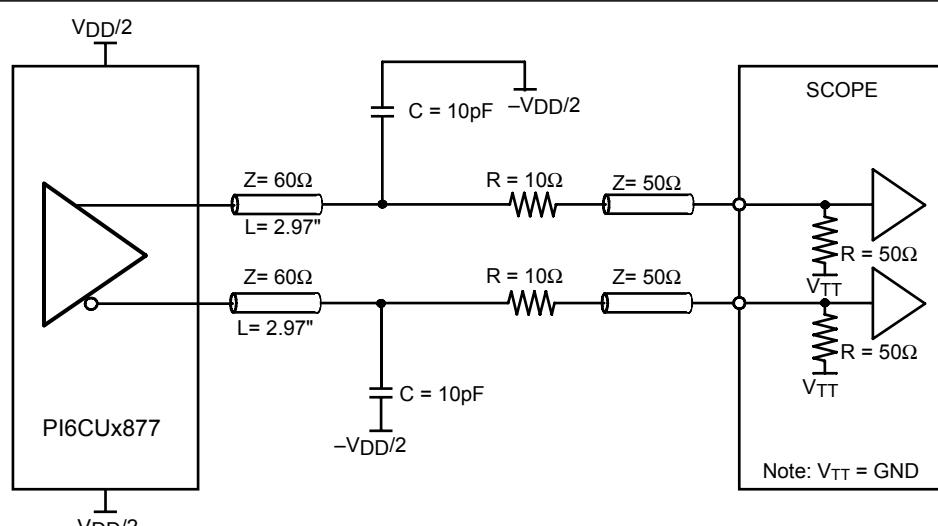


Figure 3. Output Load Test Circuit 2

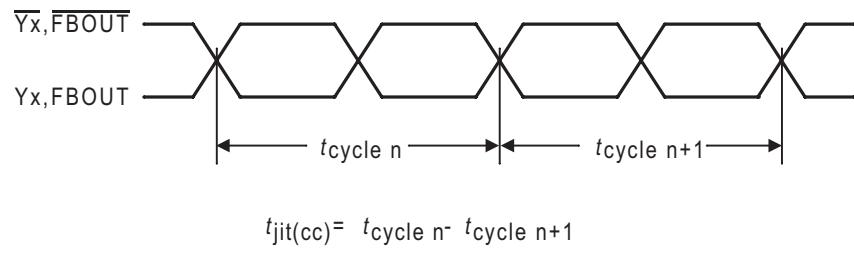


Figure 4. Cycle-to-Cycle Jitter

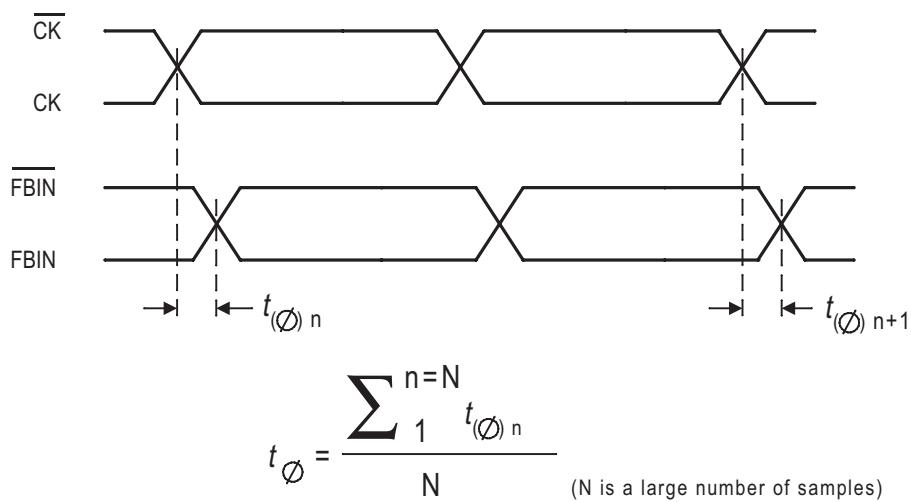


Figure 5. Static Phase Offset

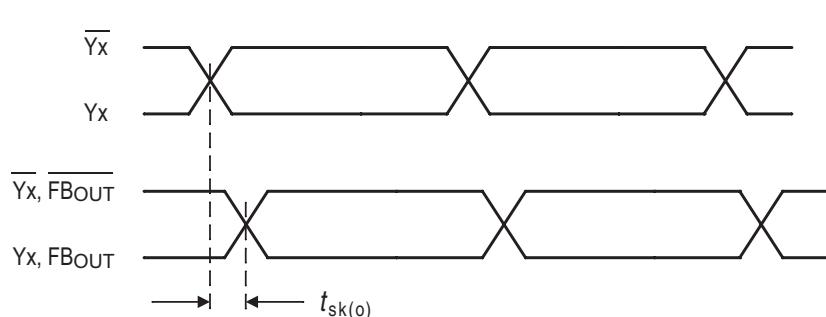


Figure 6. Output Skew

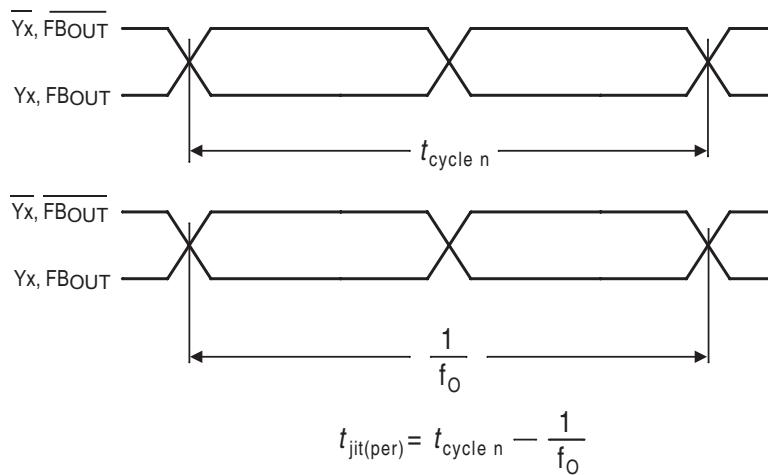


Figure 7. Period Jitter (f_0 = average input frequency measured at $\overline{CK}/\overline{CK}$)

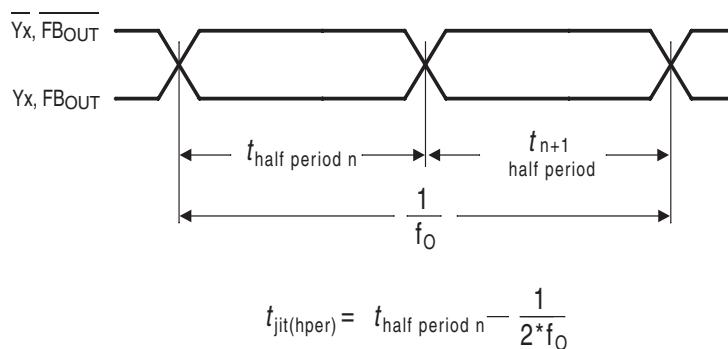


Figure 8. Half-Period Jitter

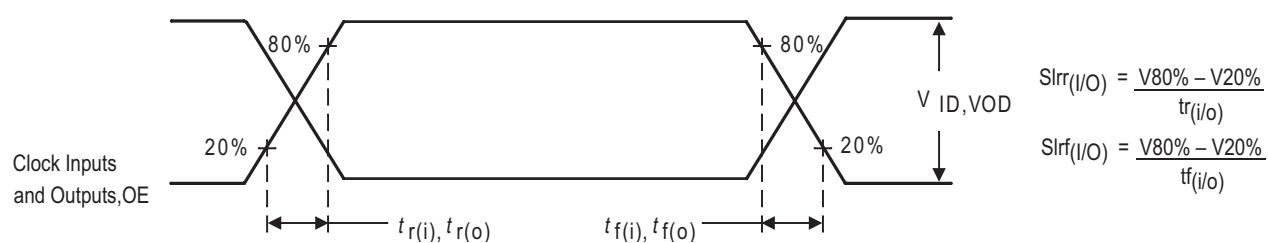


Figure 9. Input and Output Slew Rates

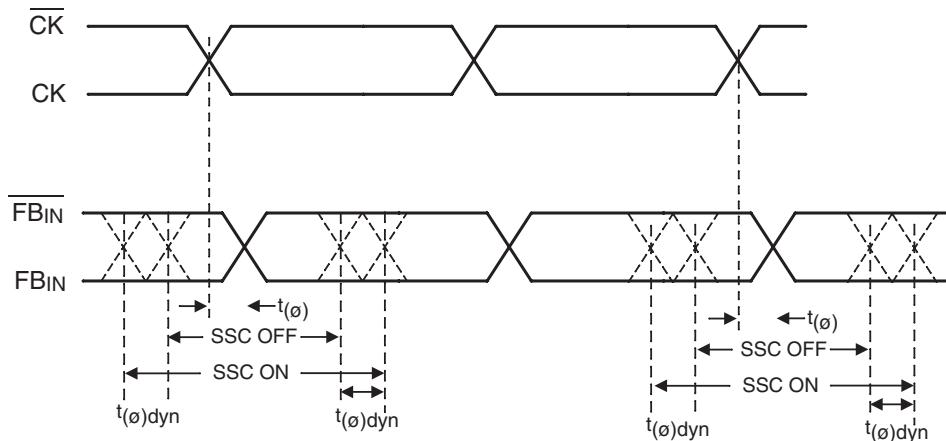


Figure 10. Dynamic Phase Offset

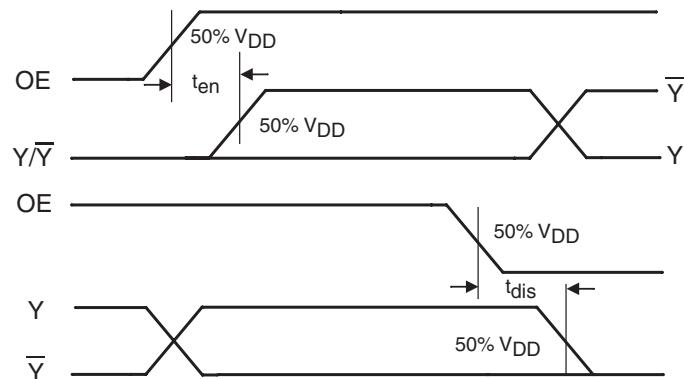
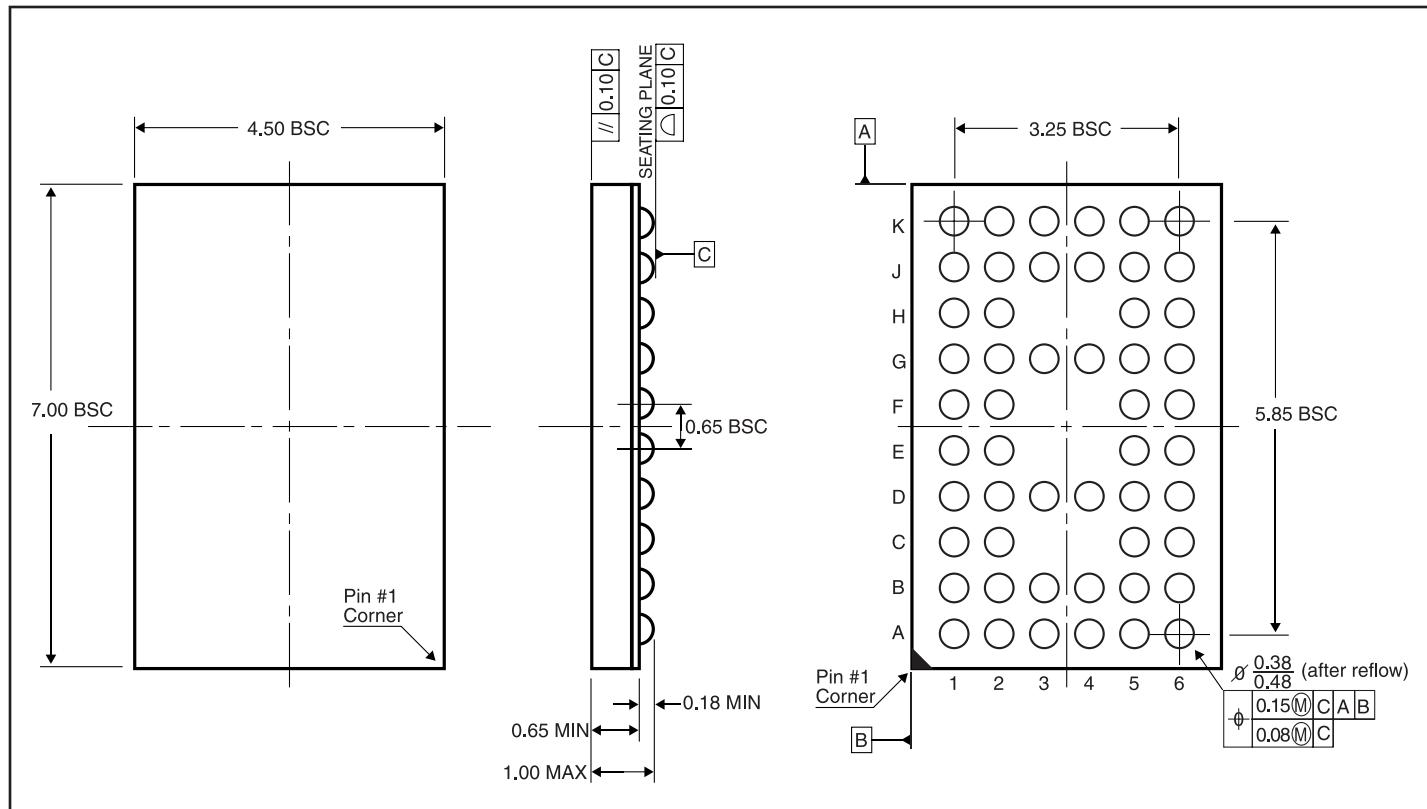


Figure 11. Time Delay Between Output Enable (OE) and Clock Output (\bar{Y} , Y)

Packaging Mechanical: 52-Ball VFBGA (NF)

Ordering Information^(1,2)

Ordering Code	Package Code	Package Description
PI6CU877NFE	NF	Pb-free & Green, 52-ball VFBGA
PI6CUA877NFE	NF	Pb-free & Green, 52-ball VFBGA

Notes:

1. Thermal characteristics can be found on the company web site at <http://www.pericom.com/packaging/>
2. E = Pb-free and Green

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pericom](#):

[PI6CU877NFE](#) [PI6CUA877NFE](#) [PI6CU877NFEX](#) [PI6CUA877NFEX](#)