



## 16V to 34V<sub>IN</sub>, 12V to 28V<sub>OUT</sub>, 120W Cool-Power ZVS Buck-Boost

### Product Description


The PI3749-x0 is high efficiency, wide range DC-DC ZVS Buck-Boost regulator. This high density System-in-Package (SiP) integrates controller, power switches, and support components. The integration of a high performance Zero-Voltage Switching (ZVS) topology, within the PI3749-x0, increases point of load performance providing best in class power efficiency. The PI3749-x0 requires an external inductor, resistive feedback divider and minimal capacitors to form a complete DC-DC switching mode buck-boost regulator.

The ZVS architecture also enables high frequency operation while minimizing switching losses and maximizing efficiency. The high switching frequency operation reduces the size of the external filtering components, improves power density, and enables very fast dynamic response to line and load transients.

### Features

- Up to 98.5% efficiency at 800kHz FSW
- Over 200W of continuous output power (for specific conditions)
- Fast transient response
- Parallel capable with single wire current sharing
- External frequency synchronization / interleaving
- High Side Current Sense Amplifier
- General Purpose Amplifier

### Typical Application

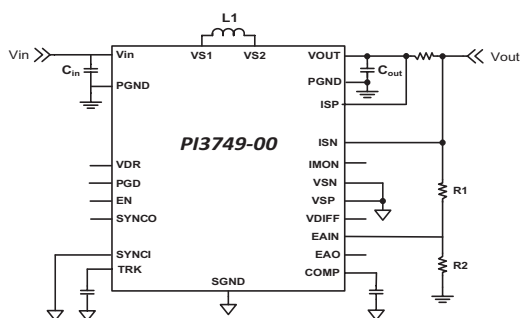


- Input Over/Undervoltage Lockout (OVLO/UVLO)
- Output Overvoltage Protection (OVP)
- Overtemperature Protection (OTP)
- Fast and slow current limits
- -40°C to 115°C operating range (TJ)
- Excellent light load efficiency
- Optional I<sup>2</sup>C functionality & programmability:
  - V<sub>OUT</sub> margining
  - Fault reporting
  - Enable and SYNCI pin polarity

### Applications

- Computing, Communications, Industrial
- Variable output step up/down voltage regulation

### Package Information

- 10mm x 14mm x 2.56mm LGA SiP

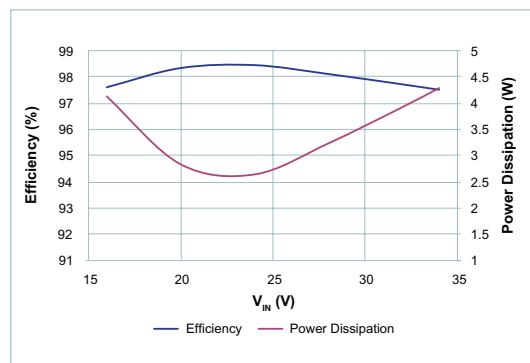

## Contents

Contents	Page
<a href="#">Order Information</a>	<a href="#">3</a>
<a href="#">Absolute Maximum Ratings</a>	<a href="#">3</a>
<a href="#">Pin Description</a>	<a href="#">4</a>
<a href="#">Package Pin-Out</a>	<a href="#">5</a>
<a href="#">Large Pin Blocks</a>	<a href="#">5</a>
<a href="#">Storage and Handling Information</a>	<a href="#">6</a>
<a href="#">Block Diagram</a>	<a href="#">6</a>
<a href="#">Electrical Characteristics</a>	<a href="#">7</a>
<a href="#">Performance Characteristics</a>	<a href="#">10</a>
<a href="#">Efficiency &amp; Power Loss</a>	<a href="#">12</a>
<a href="#">Safe Operating Area</a>	<a href="#">12</a>
<a href="#">Thermal De-Rating</a>	<a href="#">13</a>
<a href="#">MTBF</a>	<a href="#">14</a>
<a href="#">Functional Description</a>	<a href="#">15</a>
<a href="#">Enable</a>	<a href="#">15</a>
<a href="#">Switching Frequency Synchronization</a>	<a href="#">15</a>
<a href="#">Soft-Start and Tracking</a>	<a href="#">15</a>
<a href="#">Remote Sensing Differential Amplifier</a>	<a href="#">15</a>
<a href="#">Power Good</a>	<a href="#">15</a>
<a href="#">Output Current Limit Protection</a>	<a href="#">15</a>
<a href="#">Input Undervoltage Lockout</a>	<a href="#">15</a>
<a href="#">Input Overvoltage Lockout</a>	<a href="#">15</a>
<a href="#">Output Overvoltage Protection</a>	<a href="#">15</a>
<a href="#">Overtemperature Protection</a>	<a href="#">16</a>
<a href="#">Pulse Skip Mode (PSM)</a>	<a href="#">16</a>
<a href="#">Variable Frequency Operation</a>	<a href="#">16</a>
<a href="#">IMON Amplifier</a>	<a href="#">16</a>
<a href="#">I<sup>2</sup>C Interface Operation</a>	<a href="#">16</a>

Contents	Page
<a href="#">Applications Information</a>	<a href="#">17</a>
<a href="#">Input / Output Range Limitation</a>	<a href="#">17</a>
<a href="#">Output Voltage Trim</a>	<a href="#">17</a>
<a href="#">Soft-Start Adjustment and Tracking</a>	<a href="#">17</a>
<a href="#">Inductor Pairing</a>	<a href="#">17</a>
<a href="#">Thermal De-rating</a>	<a href="#">17</a>
<a href="#">Filter Considerations</a>	<a href="#">17</a>
<a href="#">Parallel Operation</a>	<a href="#">18</a>
<a href="#">I<sup>2</sup>C Addressing</a>	<a href="#">20</a>
<a href="#">I<sup>2</sup>C Command Structure</a>	<a href="#">20</a>
<a href="#">I<sup>2</sup>C Parameter Readback</a>	<a href="#">21</a>
<a href="#">I<sup>2</sup>C Volatile Addresses for Parameter Programming</a>	<a href="#">21</a>
<a href="#">MRGN: Margin Control</a>	<a href="#">22</a>
<a href="#">Package Drawings</a>	<a href="#">23</a>
<a href="#">Receiving PCB Pattern Design Recommendations</a>	<a href="#">24</a>
<a href="#">Revision History</a>	<a href="#">25</a>
<a href="#">Warranty</a>	<a href="#">26</a>

## Order Information

Part Number	Description	Package	Transport Media	MFG
PI3749-00-LGIZ	16V <sub>IN</sub> to 34V <sub>IN</sub> SiP	10mm x 14mm 108-pin LGA	TRAY	Picor
PI3749-20-LGIZ	16V <sub>IN</sub> to 34V <sub>IN</sub> SiP I <sup>2</sup> C compatible	10mm x 14mm 108-pin LGA	TRAY	Picor

## Absolute Maximum Ratings

**Note:** Stresses beyond these limits may cause permanent damage to the device. Operation at these conditions or conditions beyond those listed in the Electrical Specifications table is not guaranteed. All voltage nodes are referenced to PGND unless otherwise noted.

Location	Name	V <sub>MAX</sub>	V <sub>MIN</sub>	I <sub>SOURCE</sub>	I <sub>SINK</sub>
1-2,G-K	V <sub>IN</sub>	36V	-0.3V	40A <sup>[1]</sup>	40A <sup>[1]</sup>
4-5,G-K	VS1	36V	-0.7 V <sub>DC</sub>	40A <sup>[1]</sup>	18A <sup>[1]</sup>
10-11,G-K	VS2	36V	-0.7 V <sub>DC</sub>	40A <sup>[1]</sup>	18A <sup>[1]</sup>
13-14,G-K	V <sub>OUT</sub>	36V	-0.7 V <sub>DC</sub>	40A <sup>[1]</sup>	40A <sup>[1]</sup>
1E	VDR	5.5V	-0.3V	30mA	200mA
1D	PGD	5.5V	-0.3V	20mA	20mA
1C	SYNCO	5.5V	-0.3V	5mA	5mA
1B	SYNCI	5.5V	-0.3V	5mA	5mA
1A	ADR1	5.5V	-0.3V	5mA	5mA
2A	ADRO	5.5V	-0.3V	5mA	5mA
3A	SCL	5.5V	-0.3V	5mA	5mA
4A	SDA	5.5V	-0.3V	10mA	10mA
5A	EN	5.5V	-0.3V	5mA	5mA
6A	TRK	5.5V	-0.3V	50mA	50mA
7A	TEST5	5.5V	-0.3V	5mA	5mA
8A	COMP	5.5V	-0.3V	5mA	5mA
9A	VSN	5.5V	-1.5V	5mA	5mA
10A	VSP	5.5V	-1.5V	5mA	5mA
11A	VDIFF	5.5V	-0.5V	5mA	5mA
12A	EAIN	5.5V	-0.3V	5mA	5mA
13A	EAO	5.5V	-0.3V	5mA	5mA
14A	IMON	5.5V	-0.3V	5mA	5mA
14D	ISN <sup>[2]</sup>	40V	-2 V <sub>DC</sub>	5mA	5mA
14E	ISP <sup>[2]</sup>	40V	-2 V <sub>DC</sub>	5mA	5mA
10-14,B + 10-12,C-E	SGND	0.3V	-0.3V	200mA	200mA
2-9,B-E + 7-8,F-K	PGND	N/A	N/A	18A <sup>[1]</sup>	18A <sup>[1]</sup>


<sup>[1]</sup> Non-Operating Test Mode Limits.

<sup>[2]</sup> The ISP pin to ISN pin has a maximum differential limit of +5.5V<sub>DC</sub> and -0.5V<sub>DC</sub>.

## Pin Description

Pin Number	Pin Name	Description
1-2,G-K	V <sub>IN</sub>	Input voltage and sense node for UVLO, OVLO and feed forward compensation.
4-5,G-K	VS1	Input side switching node and ZVS sense node for power switches.
10-11,G-K	VS2	Output side switching node and ZVS sense node for power switches.
13-14,G-K	V <sub>OUT</sub>	Output voltage and sense node for power switches, V <sub>OUT</sub> feed forward compensation, V <sub>OUT_OV</sub> and internal signals.
1E	VDR	Internal 5.1V supply for gate drivers and internal logic; not for external use.
1D	PGD	Fault & Power Good indicator. PGD pulls low when the regulator is not operating or if EAIN is less than 1.4V.
1C	SYNCO	Synchronization output. Outputs a high signal for ½ of the programmed switching period at the beginning of each switching cycle, for synchronization of other regulators.
1B	SYNCI	Synchronization input. When a falling edge synchronization pulse is detected, the PI3749-x0 will delay the start of the next switching cycle until the next falling edge sync pulse arrives, up to a maximum delay of two times the programmed switching period. If the next pulse does not arrive within two times the programmed switching period, the controller will leave sync mode and start a switching cycle automatically. Connect to SGND when not in use.
1A	ADR1	I <sup>2</sup> C Addressing Pin, for use with PI3749-20 only. No connect for the PI3749-00.
2A	ADR0	I <sup>2</sup> C Addressing Pin, for use with PI3749-20 only. No connect for the PI3749-00.
3A	SCL	I <sup>2</sup> C Clock, for use with the PI3749-20 only. Connect to SGND for PI3749-00.
4A	SDA	I <sup>2</sup> C Clock, for use with the PI3749-20 only. Connect to SGND for PI3749-00.
5A	EN	Regulator Enable control. Asserted high or left floating = regulator enabled; Asserted low, regulator output disabled.
6A	TRK	Soft-start and track input. An external capacitor may be connected between TRK pin and SGND to decrease the rate of output rise during soft-start.
7A	TEST5	For factory use only. Connect to SGND in application.
8A	COMP	Error amp compensation dominant pole. Connect a capacitor between COMP and SGND to set the control loop dominant pole.
9A	VSN	General purpose amplifier inverting input
10A	VSP	General purpose amplifier non-inverting input
11A	VDIFF	General Purpose amplifier output. When unused connect VDIFF to VSN and VSP to SGND.
12A	EAIN	Error amplifier inverting input and sense for PGD. Connect by resistive divider to the output.
13A	EAO	Transconductance error amplifier output, PWM input and external connection for load sharing. Connect a capacitor between EAO and SGND to set the control loop high frequency pole.
14A	IMON	High side current sense amplifier output
14D	ISN	High side current sense amplifier negative input
14E	ISP	High side current sense amplifier positive input
10-14,B + 10-12,C-E	SGND	Signal ground. Internal logic and analog ground for the regulator. SGND and PGND are star connected within the regulator package.
2-9,B-E + 7-8,F-K	PGND	Power ground. V <sub>IN</sub> , V <sub>OUT</sub> , VS1 and VS2 power returns. SGND and PGND are star connected within the regulator package.

## Package Pin-Out

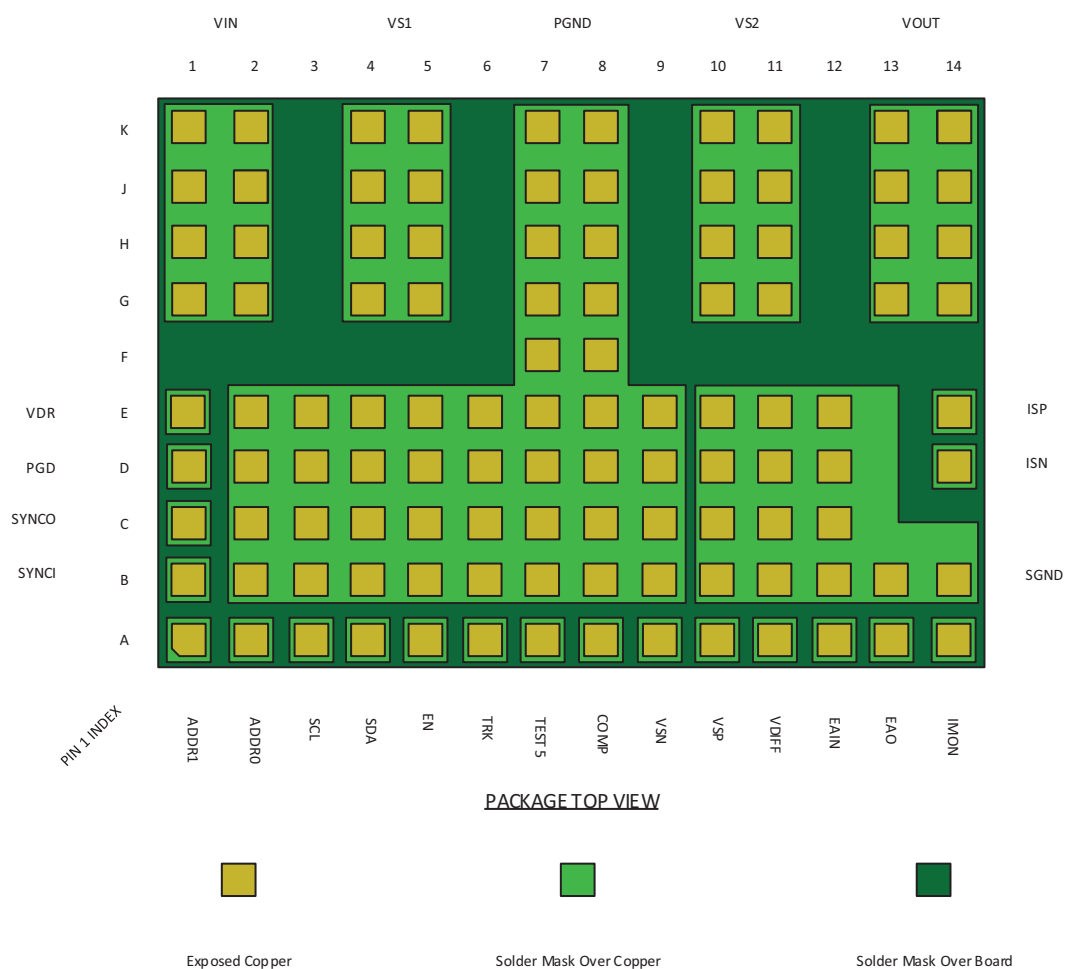

## Large Pin Blocks


Pin Block Name	Group of pins
V <sub>IN</sub>	K1-2, J1-2, H1-2, G1-2
V <sub>S1</sub>	K4-5, J4-5, H4-5, G4-5
PGND	K7-8, J7-8, H7-8, G7-8, F7-8, E2-9, D2-9, C2-9, B2-9
V <sub>S2</sub>	K10-11, J10-11, H10-11, G10-11
V <sub>OUT</sub>	K13-14, J13-14, H13-14, G13-14
SGND	E10-12, D10-12, C10-12, B10-14

## Storage and Handling Information

Maximum Storage Temperature Range	-65°C to 150°C
Maximum Operating Junction Temperature Range	-40°C to 115°C
Soldering Temperature for 20 seconds	245°C
MSL Rating	3
ESD Rating <sup>[3]</sup>	500V HBM; 1.0kV CDM

<sup>[3]</sup> JESD22-C101F, JESD22-A114F.

## Block Diagram

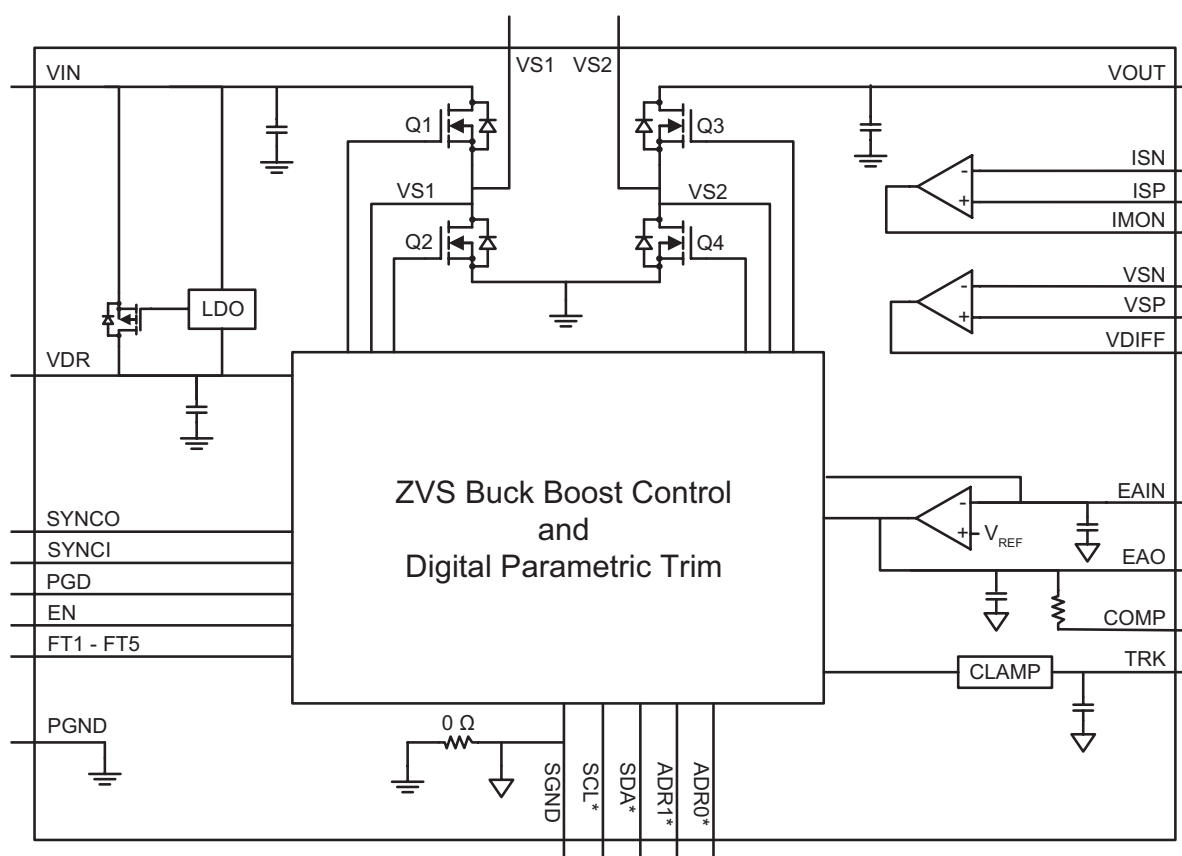

\*Simplified Block Diagram (I<sup>2</sup>C pins SCL, SDA, ADR0, ADR1, only active for PI3749-20 device version)

## Electrical Characteristics

Specifications apply for the conditions  $-40^{\circ}\text{C} < T_J < 115^{\circ}\text{C}$ ,  $V_{\text{IN}} = 16\text{V} - 34\text{V}$ ,  $V_{\text{OUT}} = 24\text{V}$ ,  $L_{\text{EXT}} = 480\text{nH}^{[4]}$ , external  $C_{\text{IN}} = C_{\text{OUT}} = 20\mu\text{F}$ , unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Input Specifications</b>						
Input Voltage	$V_{\text{IN\_DC}}$		16	24	34	V
Input Current	$I_{\text{IN\_DC}}$	$I_{\text{OUT}} = 4\text{A}$ , $V_{\text{IN}} = 24\text{V}$ , $V_{\text{OUT}} = 24\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}$		4.06		A
Input Current	$I_{\text{IN\_DC}}$	$I_{\text{OUT}} = 7.0\text{A}$ , $V_{\text{IN}} = 16\text{V}$ , $V_{\text{OUT}} = 24\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}$		10.8		A
Input Current During Output Short (fault condition duty cycle)	$I_{\text{IN\_SHORT}}$	<sup>[5]</sup>		2.5		mA
Input Quiescent Current	$I_{\text{Q\_VIN}}$	Enabled (no load)		6.6		mA
Input Voltage Slew Rate	$V_{\text{IN\_SR}}$	<sup>[5]</sup>			1	V/ $\mu\text{s}$
Internal Input Capacitance	$C_{\text{IN}}$	50V, X7R type $25^{\circ}\text{C}$ , $V_{\text{OUT}} = 0\text{V}$		2		$\mu\text{F}$
$V_{\text{IN}}$ UVLO threshold rising	$V_{\text{IN\_UVLO\_START}}$		13.0	14.1	15.0	V
$V_{\text{IN}}$ UVLO hysteresis	$V_{\text{IN\_UVLO\_HYS}}$			0.7		V
$V_{\text{IN}}$ OVLO threshold rising	$V_{\text{IN\_OVLO\_START}}$		35.2	37.4	39.5	V
$V_{\text{IN}}$ OVLO hysteresis	$V_{\text{IN\_OVLO\_HYS}}$			0.75		V
<b>Output Specifications</b>						
Output Voltage Range	$V_{\text{OUT\_DC}}$	$V_{\text{IN}} = 16\text{V}$ to $34\text{V}$	12		29	V
		$V_{\text{IN}} = 24\text{V}$ to $34\text{V}$	12		34	
Output Current Steady State	$I_{\text{OUT\_DC}}$	$V_{\text{IN}} = 24\text{V}$ , $V_{\text{OUT}} = 24\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}^{[6]}$	6.8			A
		$V_{\text{IN}} = 16\text{V}$ , $V_{\text{OUT}} = 24\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}^{[6]}$	7.2			
		$V_{\text{IN}} = 24\text{V}$ , $V_{\text{OUT}} = 12\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}^{[6]}$	10			
Output Power Steady State	$P_{\text{OUT\_DC}}$	$V_{\text{IN}} = 24\text{V}$ , $V_{\text{OUT}} = 24\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}^{[6]}$	163.2			W
		$V_{\text{IN}} = 16\text{V}$ , $V_{\text{OUT}} = 24\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}^{[6]}$	172.8			
		$V_{\text{IN}} = 24\text{V}$ , $V_{\text{OUT}} = 12\text{V}$ , $T_{\text{CASE}} = 25^{\circ}\text{C}^{[6]}$	120			
Output Ripple	$V_{\text{OUT\_AC}}$	$I_{\text{OUT}} = 4\text{A}$ , $V_{\text{IN}} = 24\text{V}$ , $V_{\text{OUT}} = 16\text{V}$ , $T_{\text{case}} = 25^{\circ}\text{C}$ $C_{\text{OUT\_EX}} = 8 \times 10\mu\text{F}$ , 50V, X7S, 20MHz BW		137		mVp-p
Internal Output Capacitance	$C_{\text{OUT}}$	50V, X7R type $25^{\circ}\text{C}$ , $V_{\text{OUT}} = 0\text{V}$		1		$\mu\text{F}$
$V_{\text{OUT}}$ Over Voltage Threshold	$V_{\text{OUT\_OVT}}$	Rising $V_{\text{OUT}}$ threshold to detect open loop	35.2	37.4	39.5	V
V drive	$V_{\text{DR}}$	Internal drive supply, internal use only	4.84	5.10	5.36	V
<b>Current Sense Amplifier (Dedicated to monitor Input or Output current)</b>						
ISP Pin Bias Current (Sink)		$V_{\text{OUT}} = 10\text{V}$ , Flows to SGND	90	150	260	$\mu\text{A}$
ISN Pin Bias Current		$V_{\text{OUT}} = 10\text{V}$		0		$\mu\text{A}$
Common Mode Input Range			8		36	V
IMON Source Current			1	1.8	3	mA
IMON Sink Current			1	1.6	2.6	mA
IMON Output At No Load			0		10	mV
Full Scale Error		40mV input	-4		4	%
Bandwidth		<sup>[5]</sup>		40		kHz
Settling Time For Full Scale Step		1%		20		$\mu\text{s}$
Gain	$A_{\text{V\_CS}}$			20		V/V

## Electrical Characteristics (Cont.)

Specifications apply for the conditions  $-40^{\circ}\text{C} < T_J < 115^{\circ}\text{C}$ ,  $V_{\text{IN}} = 16\text{V} - 34\text{V}$ ,  $V_{\text{OUT}} = 24\text{V}$ ,  $L_{\text{EXT}} = 480\text{nH}^{[4]}$ , external  $C_{\text{IN}} = C_{\text{OUT}} = 20\mu\text{F}$ , unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>General Purpose Amplifier</b>						
Open Loop Gain		[5]	96	120	140	dB
Small Signal Gain-Bandwidth		[5]	5	7	12	MHz
Offset			-1	0.2	1	mV
Common Mode Input Range			-0.1		2.5	V
Differential Mode Input Range					2	V
Maximum Output Voltage		IDIFF = -1mA			$V_{\text{DR}} - 0.2\text{V}$	V
Minimum Output Voltage		No Load			20	mV
Capacitive Load for Stable Operation		[5]	0		100	pF
Slew Rate				10		V/ $\mu\text{s}$
Output Current			-1		1	mA
<b>Transconductance Error Amplifier</b>						
Reference	$V_{\text{REF}}$	EAIN = EAO	1.667	1.7	1.734	V
Input Range	$V_{\text{EAIN}}$	Note $V_{\text{EAIN\_OV}}$ below	0		$V_{\text{DR}}$	V
Maximum Output Voltage			3.45		4.0	V
Minimum Output Voltage				0	0.1	V
Transconductance		Factory Set		7.6		mS
Zero Resistor		Factory Set		7.0		k $\Omega$
EAO Output Current Sourcing		$V_{\text{EAO}} = 50\text{mV}$ , $V_{\text{EAIN}} = 0\text{V}$		400		$\mu\text{A}$
EAO Output Current Sinking		$V_{\text{EAO}} = 2\text{V}$ , $V_{\text{EAIN}} = 5\text{V}$		400		$\mu\text{A}$
Open Loop Gain		$R_{\text{OUT}} > 1\text{M}\Omega$ [5]	70	80		dB
<b>Control and Protection</b>						
Switching Frequency	$F_{\text{SW}}$	$V_{\text{IN}} = V_{\text{OUT}} = 24\text{V}$ $I_{\text{OUT}} = 2\text{A}$		800		kHz
Switching Frequency	$F_{\text{SW}}$	$V_{\text{IN}} = 16\text{V}$ , $V_{\text{OUT}} = 12\text{V}$ $I_{\text{OUT}} = 7\text{A}$		480		kHz
$V_{\text{EAO}}$ Pulse Skip Threshold	$V_{\text{EAO\_PST}}$	$V_{\text{EAO}}$ to SGND		0.6		V
Control Node Range	$V_{\text{RAMP}}$		0		3.3	V
$V_{\text{EAO}}$ Overload Threshold	$V_{\text{EAO\_OL}}$	$V_{\text{EAO}}$ to SGND	3.2		3.4	V
Overload Timeout	$T_{\text{OL}}$	$V_{\text{EAO}} > V_{\text{EAO\_OL}}$		1		msec
Vout Slow Current Limit	$V_{\text{OUT\_SCL}}$	10 $\mu\text{s}$ time constant		18		A
$V_{\text{EAIN}}$ Output Over Voltage Threshold	$V_{\text{EAIN\_OV}}$	$V_{\text{EAIN}} > V_{\text{EAIN\_OV}}$		2.04		V
Overtemperature Fault Threshold	$T_{\text{OTP}}$	[5]	125	129		$^{\circ}\text{C}$
Overtemperature Restart Hysteresis	$T_{\text{OPT\_HYS}}$	[5]		30		$^{\circ}\text{C}$



## Electrical Characteristics (Cont.)

Specifications apply for the conditions  $-40^{\circ}\text{C} < T_J < 115^{\circ}\text{C}$ ,  $V_{\text{IN}} = 16\text{V} - 34\text{V}$ ,  $V_{\text{OUT}} = 24\text{V}$ ,  $L_{\text{EXT}} = 480\text{nH}^{[4]}$ , external  $C_{\text{IN}} = C_{\text{OUT}} = 20\mu\text{F}$ , unless otherwise noted.







Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Soft Start and Tracking Function</b>						
TRK Active Range		Nominal	0		1.7	V
TRK Disable Threshold			20	40	70	mV
TRK Internal Capacitance				.047		$\mu\text{F}$
Soft Start Charge Current			30	50	70	$\mu\text{A}$
Soft Start Discharge Current		$V_{\text{TRK}} = 0.5\text{V}$		8.5		mA
Soft Start Time	$t_{\text{SS}}$	Ext $C_{\text{SS}} = 0\mu\text{F}$		1.6		msec
<b>Enable</b>						
Enable High Threshold	$\text{EN}_{\text{IH}}$		0.9	1	1.1	V
Enable Low Threshold	$\text{EN}_{\text{IL}}$		0.7	0.8	0.9	V
Enable Threshold Hysteresis	$\text{EN}_{\text{HYS}}$		100	200	300	mV
Enable Pin Bias Current		$V_{\text{EN}} = 0\text{V}$ or $V_{\text{EN}} = 2\text{V}$		-50		$\mu\text{A}$
Enable Pull-up Voltage		Floating		2.0		V
Fault Restart Delay Time	$t_{\text{FR\_DLY}}$			30		msec
<b>Digital Signals</b>						
SYNCl Threshold Rising		$V_{\text{DR}} = 5.1\text{V}$		3.1		V
SYNCl Threshold Falling		$V_{\text{DR}} = 5.1\text{V}$		2.2		V
SYNCO High	$\text{SYNCO}_{\text{OH}}$		$V_{\text{DR}} - 0.5$		$V_{\text{DR}}$	V
SYNCO Low	$\text{SYNCO}_{\text{OL}}$	$I_{\text{SYNCO}_{\text{OUT}}} = 1\text{mA}$			0.5	V
PGD High Leakage	$\text{PGD}_{\text{ILH}}$	$V_{\text{PGD}} = V_{\text{DR}}$			10	$\mu\text{A}$
PGD Output Low	$\text{PGD}_{\text{OL}}$	$I_{\text{PGD}} = 4\text{mA}$			0.4	V
PGD EAIN Low Rise			1.41	1.45	1.48	V
PGD EAIN Low Fall			1.36	1.41	1.46	V
PGD EAIN Threshold Hysteresis				35		mV
PGD EAIN High			1.94	2.04	2.14	V
<b>I<sup>2</sup>C Digital Signals (PI3749-20 only)</b>						
I <sup>2</sup> C Address high threshold	$V_{\text{ADR}_x\text{-HI}}$		3.872	4.59		V
I <sup>2</sup> C Address mid threshold	$V_{\text{ADR}_x\text{-MID}}$		1.452		3.752	V
I <sup>2</sup> C Address low threshold	$V_{\text{ADR}_x\text{-LOW}}$			0.51	1.072	V
I <sup>2</sup> C Address resistance, within mid thresholds	$R_{\text{ADR}_x\text{-MID}}$	Resistance to 2.5V, when ADR <sub>x</sub> pin voltage within $V_{\text{ADR}_x\text{-MID}}$		10		V
I <sup>2</sup> C Address resistance, outside mid thresholds	$R_{\text{ADR}_x\text{-MID}}$	Resistance to 2.5V, when ADR <sub>x</sub> pin voltage outside range of $V_{\text{ADR}_x\text{-MID}}$		200		V
SCL, SDA in high	$V_{\text{SER\_IH}}$		2.1			V
SCL, SDA in low	$V_{\text{SER\_IL}}$				1.5	V
SDA out low	$V_{\text{SER\_OL}}$	Sinking up to 3mA			0.4	V
SCL, SDA pull-down current	$I_{\text{SER\_I}}$	Weak pull-down current to SGND			10	V

<sup>[4]</sup> See Inductor Pairing section.






<sup>[5]</sup> Assured to meet performance specification by design, test correlation, characterization, and/or statistical process control.


<sup>[6]</sup> Output current capability varies with input & output voltage. See performance curves in figures 15 - 17.

## Performance Characteristics TA = 25°C

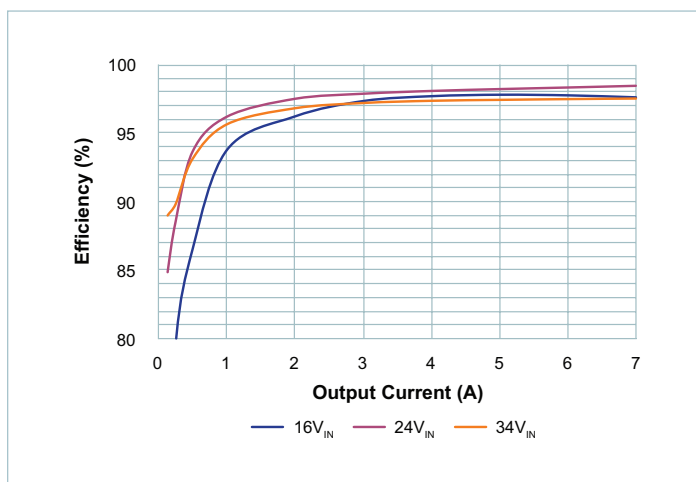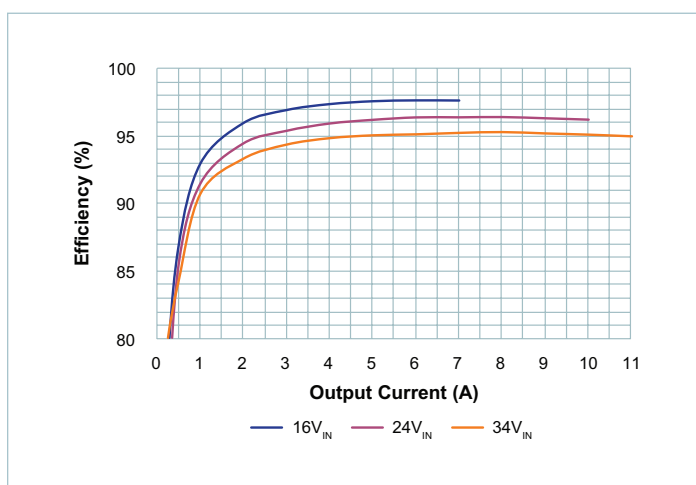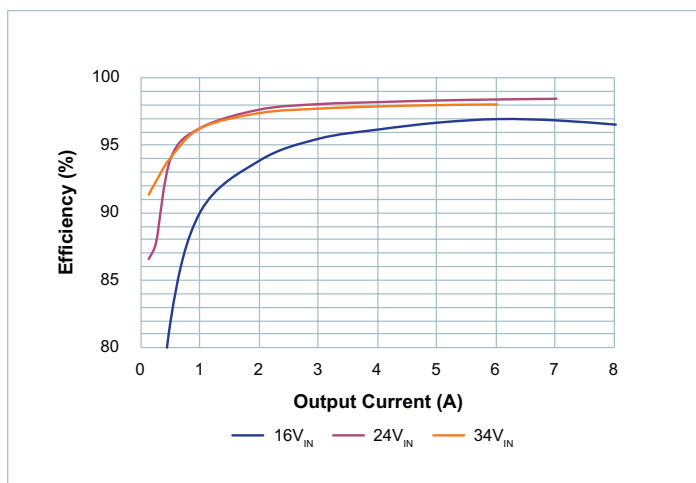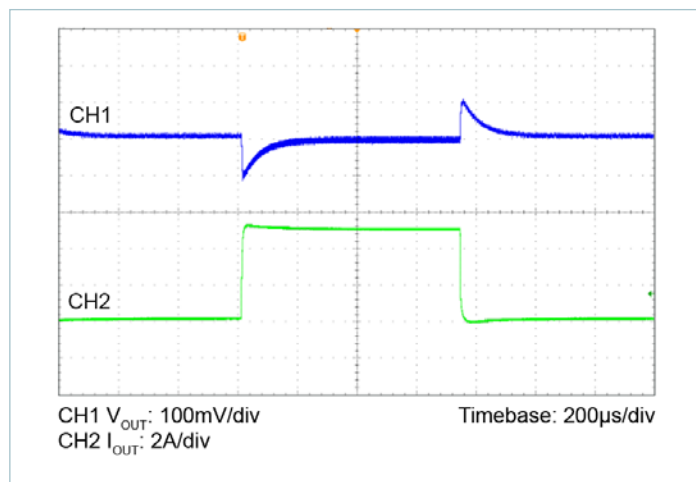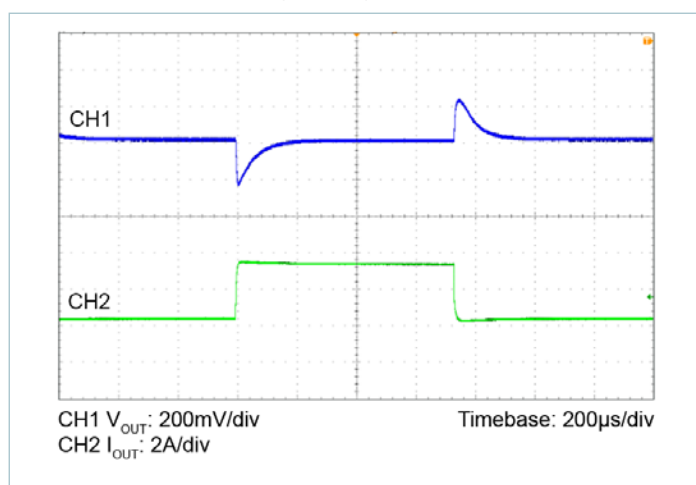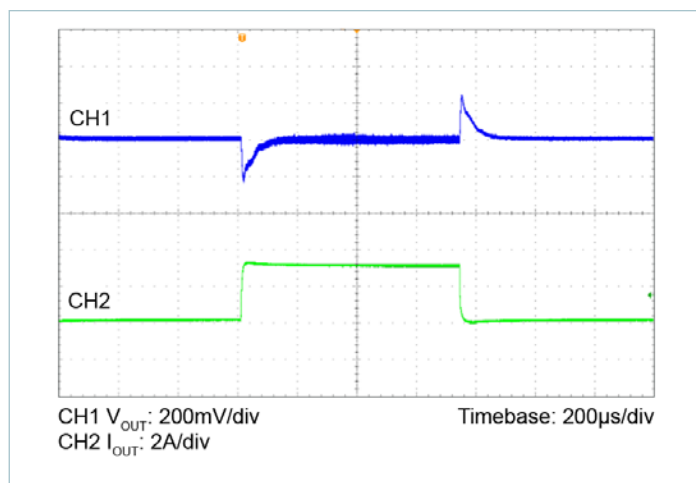
Figure 1 — 24V<sub>OUT</sub> EfficiencyFigure 2 — 12V<sub>OUT</sub> EfficiencyFigure 3 — 28V<sub>OUT</sub> EfficiencyFigure 4 — 34V<sub>IN</sub> to 12V<sub>OUT</sub>, C<sub>OUT</sub> = 8 x 10μF Ceramic  
5.0A Load Step at 5A/μsFigure 5 — 24V<sub>IN</sub> to 24V<sub>OUT</sub>, C<sub>OUT</sub> = 8 x 10μF Ceramic  
3.0A Load Step at 5A/μsFigure 6 — 16V<sub>IN</sub> to 28V<sub>OUT</sub>, C<sub>OUT</sub> = 8 x 10μF Ceramic  
3.0A Load Step at 5A/μs

## Performance Characteristics TA = 25°C (Cont.)

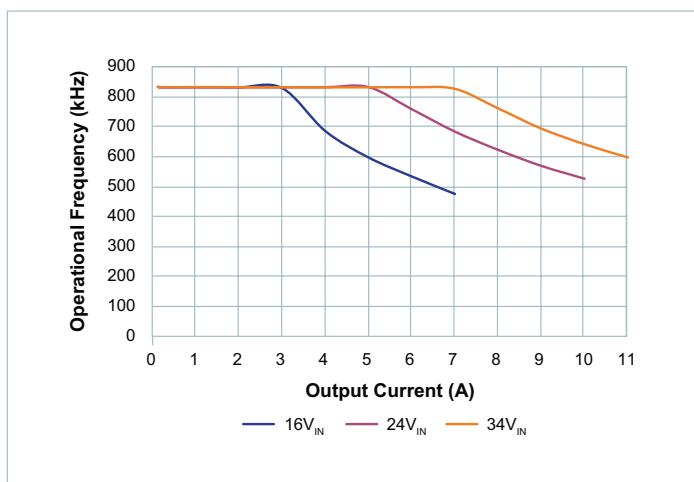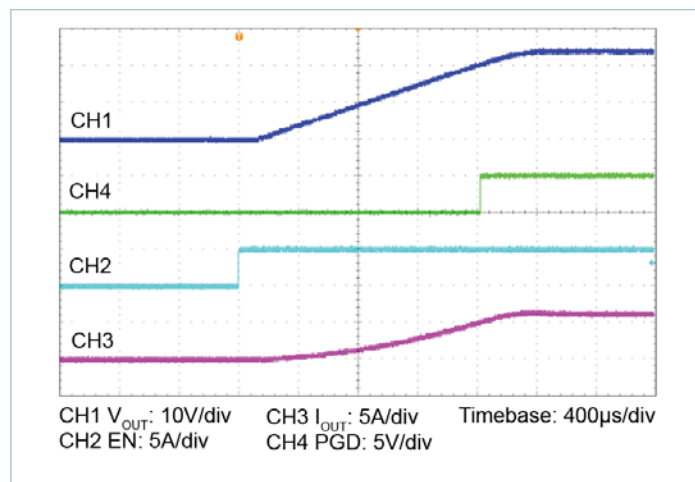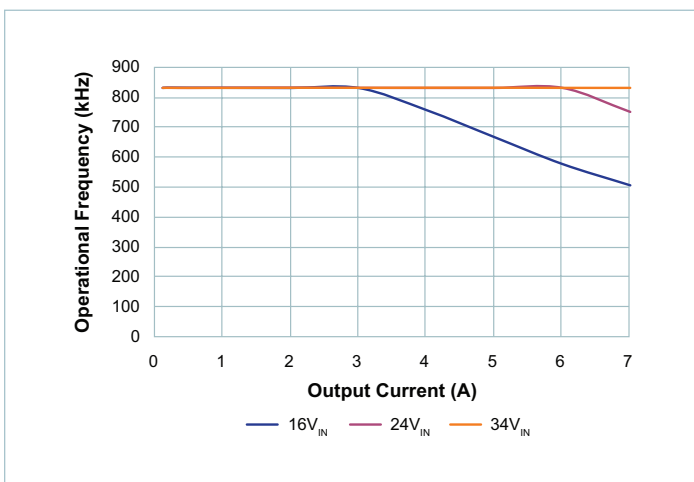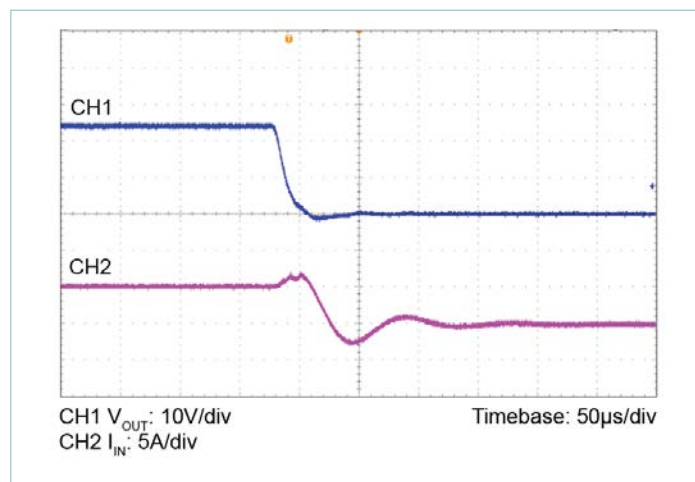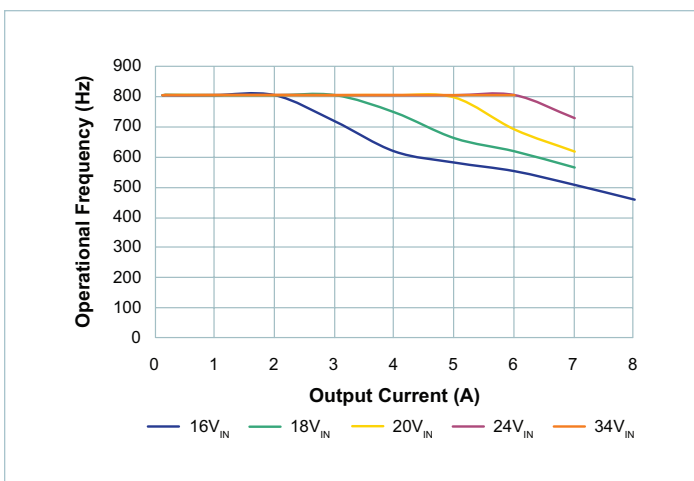
Figure 7 — Switching Frequency vs. Output Current @ 12V<sub>OUT</sub>Figure 10 — Start-up with 24V<sub>IN</sub> to 24V<sub>OUT</sub> at 5AFigure 8 — Switching Frequency vs. Output Current @ 24V<sub>OUT</sub>Figure 11 — Short Circuit with 24V<sub>IN</sub> to 24V<sub>OUT</sub> at 5AFigure 9 — Switching Frequency vs. Output Current @ 28V<sub>OUT</sub>

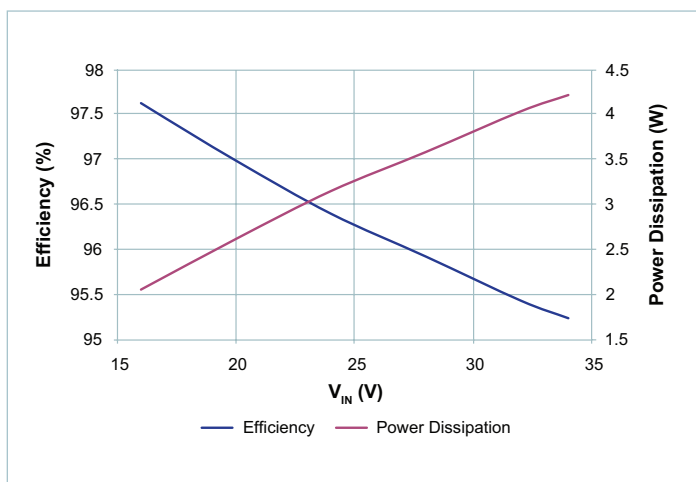Efficiency & Power Loss  $T_A = 25^\circ\text{C}$  [7]


**Figure 12** — 12V<sub>OUT</sub> Efficiency and Power Dissipation at 7A over input Voltage Range

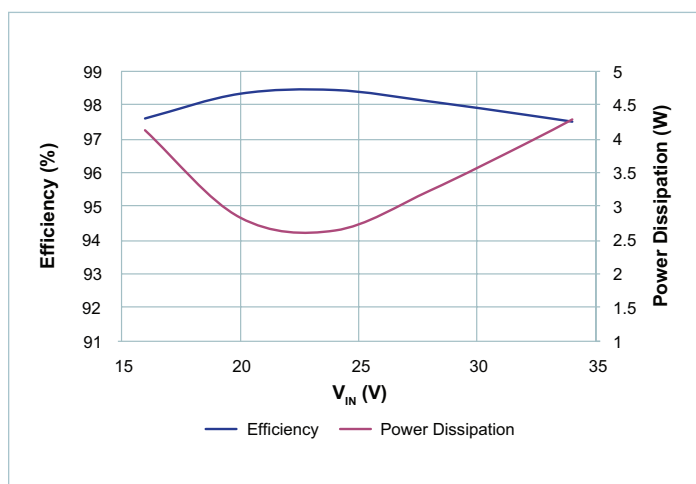


**Figure 13** — 24V<sub>OUT</sub> Efficiency and Power Dissipation at 7A over input Voltage Range

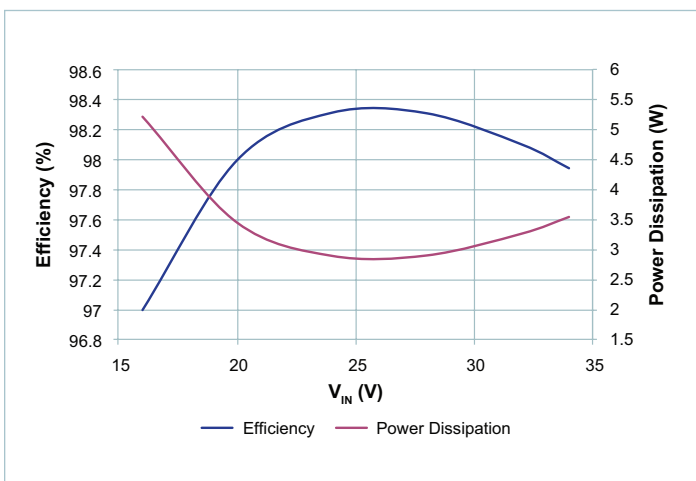


**Figure 14** — 28V<sub>OUT</sub> Efficiency and Power Dissipation at 6A over input Voltage Range

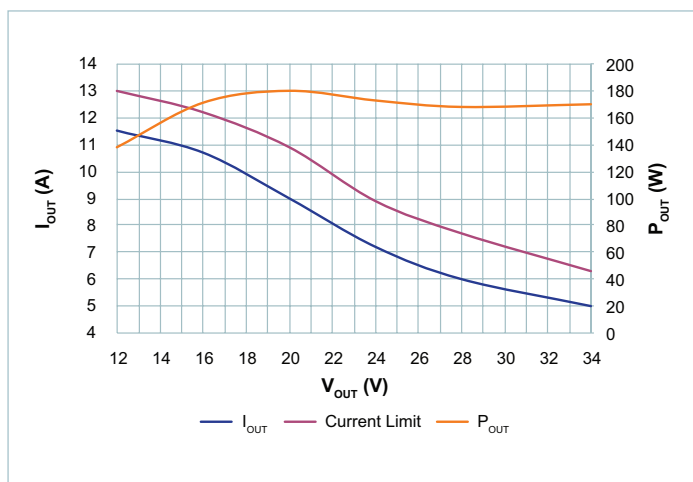Safe Operating Area  $T_A = 25^\circ\text{C}$  [7]






**Figure 15** — Power and current output at 34V<sub>IN</sub>

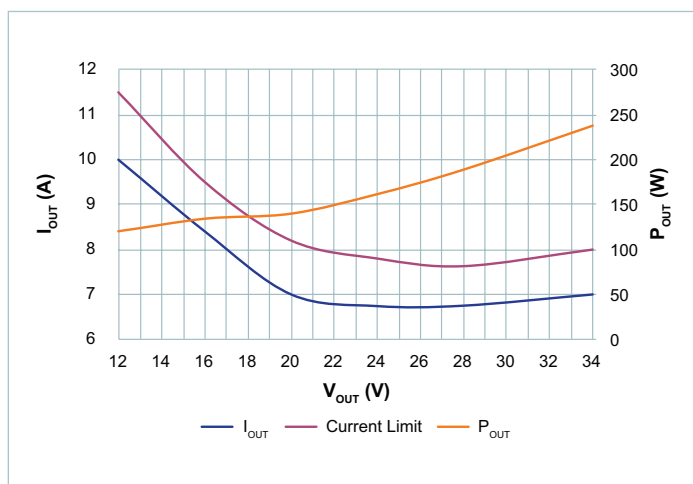


**Figure 16** — Power and current output at 24V<sub>IN</sub>

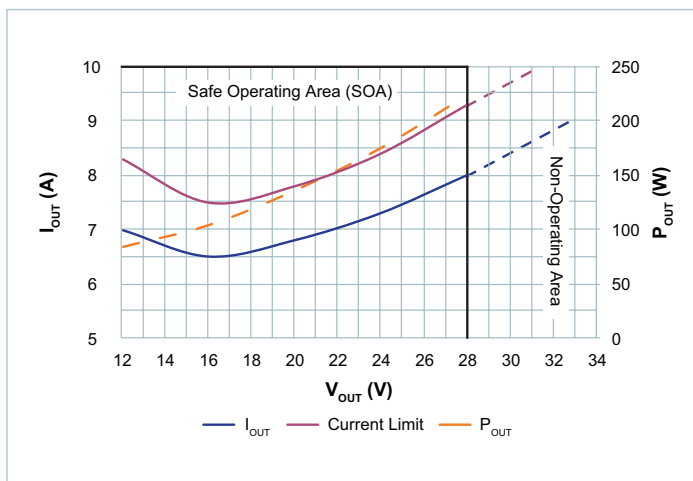

**Figure 17** — Power and current output at  $V_{IN}$  less than 24

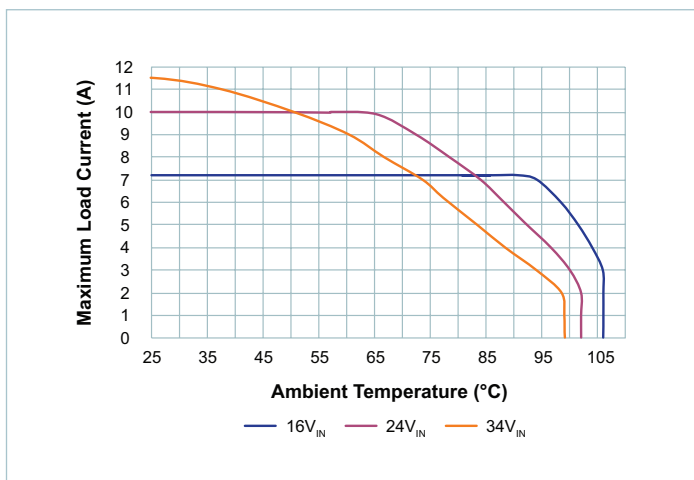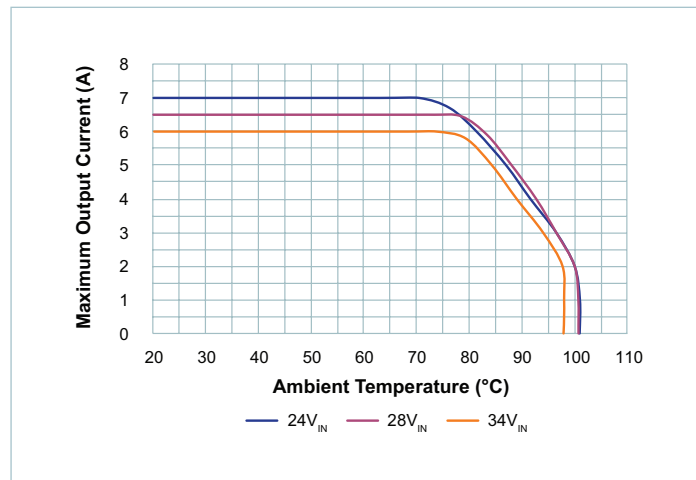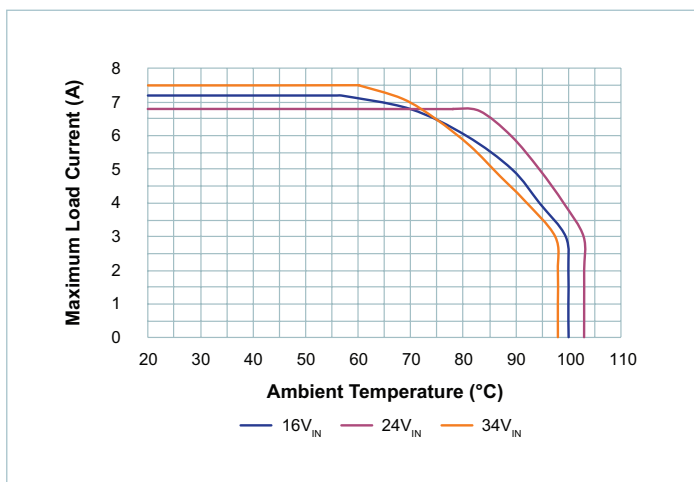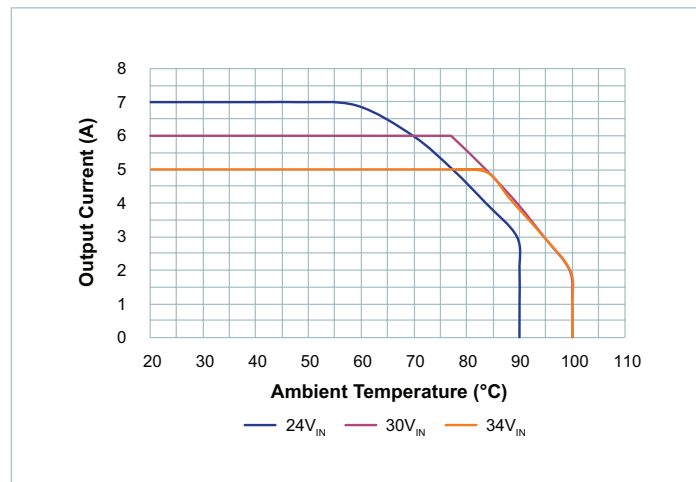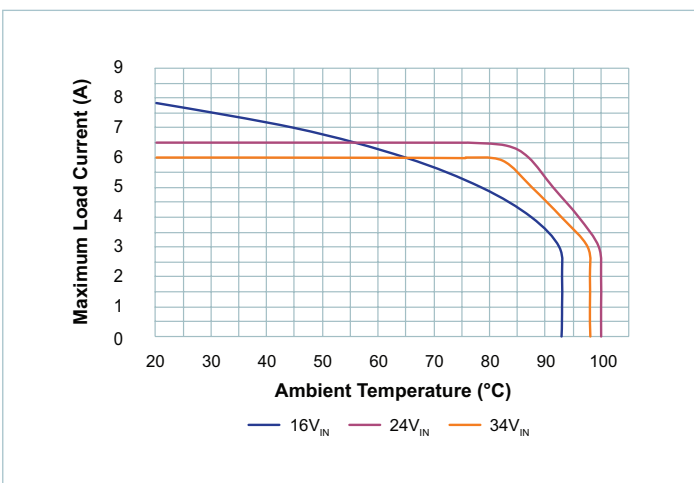Thermal De-Rating <sup>[7]</sup>Figure 18 — Thermal de-rating @  $V_{OUT} = 12V$ Figure 21 — Thermal de-rating @  $V_{OUT} = 30V$  with Limited Input RangeFigure 19 — Thermal de-rating @  $V_{OUT} = 24V$ Figure 22 — Thermal de-rating @  $V_{OUT} = 34V$  with Limited Input RangeFigure 20 — Thermal de-rating @  $V_{OUT} = 28V$ <sup>[7]</sup> Note: Testing was performed using a 3 in. x 3 in., four 2 oz. copper layers, FR4 evaluation board platform.


## MTBF

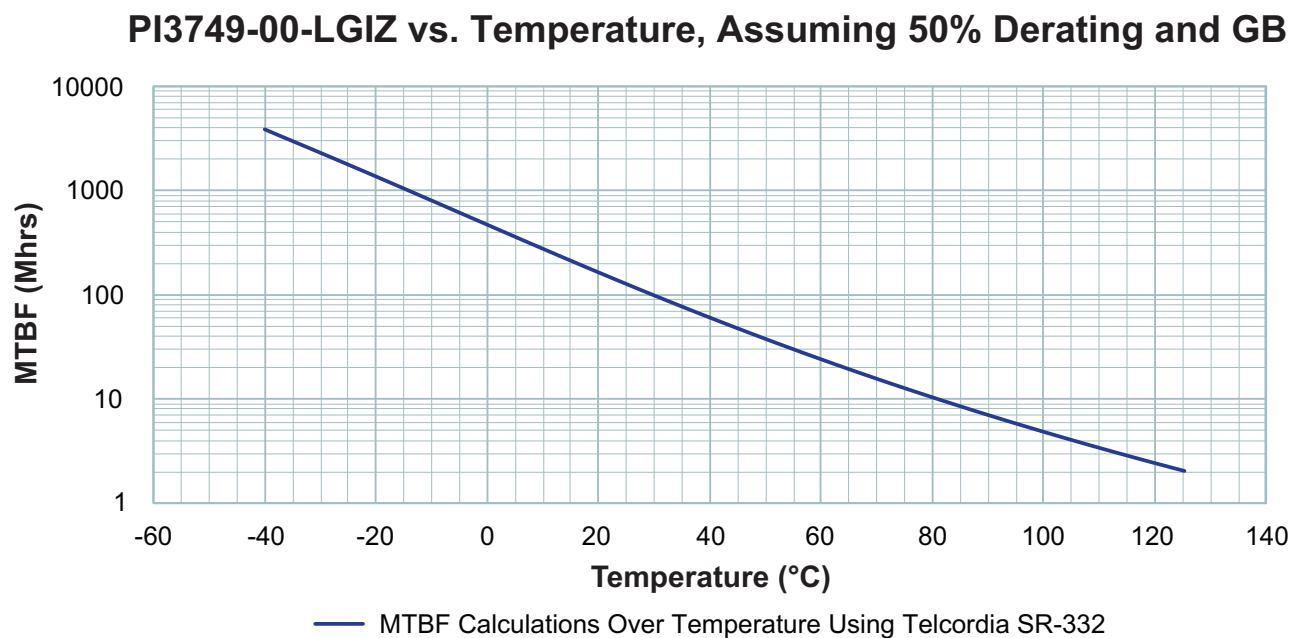

**Figure 23** — PI3749-x0 calculated MTBF Telcordia SR-332 GB

## Functional Description

The PI3749-x0 is part of a family of highly integrated ZVS Buck-Boost regulators. The PI3749-x0 has a variable output voltage that is set with a resistive divider. Performance and maximum output current are characterized with a specific external power inductor as defined in electrical specifications, with Inductor Pairing section.

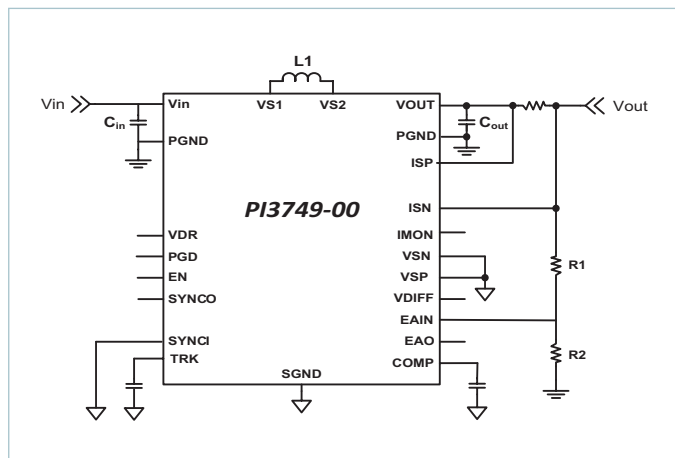

**Figure 24** — ZVS Buck-Boost with required components

For basic operation, Figure 24 shows the minimum connections and components required.

### Enable

The EN pin of the regulator is referenced to SGND and permits the user to turn the regulator on or off. The EN polarity is a positive logic assertion. If the EN pin is left floating or asserted high, the regulator output is enabled. Pulling the EN pin below 0.8V<sub>DC</sub> with respect to SGND will discharge the SS/TRK pin until the output reaches zero or the EN pin is released.

### Switching Frequency Synchronization

The SYNCI input allows the user to synchronize the controller switching frequency to the falling edge of an external clock referenced to SGND. The external clock can synchronize the unit between 50% and 110% of the preset switching frequency (FSW). The SYNCI pin should be connected to SGND when not in use, and should never be left floating.

### Soft-Start and Tracking

The PI3749-x0 provides a soft start and tracking feature using the TRK pin. Programmable Soft Start requires an external capacitor from the TRK pin to SGND in addition to the internal 47nF soft-start capacitor to set the start-up ramp period greater than  $t_{SS}$ . The PI3749-x0 output will proportionately follow the TRK pin when it is below 1.7V<sub>DC</sub>. If the TRK pin is goes below the disable threshold, the regulator will finish the current switching cycle and then stop switching.

### Remote Sensing Differential Amplifier

A general purpose operational amplifier is provided to assist with differential remote sensing and or level shifting of the output voltage. The VDIFF pin can be connected to the transconductance error amplifier input EAIN pin, or with proper

configuration can also be connected to the EAO pin to drive the modulator directly.

### Power Good

The PI3749-x0 PGD pin functions as a power good indicator and pulls low when the regulator is not operating or if EAIN is less than 1.4V.

### Output Current Limit Protection

PI3749-x0 has three methods implemented to protect from output short circuit or over current condition.

**Slow Current Limit protection:** prevents the output load from sourcing current higher than the maximum rated regulator current. If the output current exceeds the Vout Slow Current Limit ( $V_{OUT\_SCL}$ ) a slow current limit fault is initiated and the regulator is shutdown which eliminates output current flow. After Fault Restart Delay ( $t_{FR\_DLY}$ ), a soft-start cycle is initiated. This restart cycle will be repeated indefinitely until the excessive load is removed.

**Fast Current Limit protection:** monitors the regulator inductor current pulse-by-pulse to prevent the output from supplying very high current. If the regulator senses a high inductor current pulse, it will initiate a fault and stop switching. After Fault Restart Delay ( $t_{FR\_DLY}$ ), a soft-start cycle is initiated. This restart cycle will be repeated indefinitely until the excessive load is removed.

**Overload Timeout protection:** If the regulator is providing maximum output power for longer than the Overload Timeout delay ( $T_{OL}$ ), it will initiate a fault and stop switching. After Fault Restart Delay ( $t_{FR\_DLY}$ ), a soft-start cycle is initiated. This restart cycle will be repeated indefinitely until the overload load is removed.

### Input Undervoltage Lockout

If  $V_{IN}$  falls below the input Under Voltage Lockout (UVLO) threshold, the PI3749-x0 will complete the current cycle and stop switching. The system will restart once the input voltage is reestablished and after the Fault Restart Delay.

### Input Overvoltage Lockout

If  $V_{IN}$  rises above the input Overvoltage Lockout (OVLO) threshold, the PI3749-x0 will complete the current cycle and stop switching. The system will restart once the input voltage is reestablished and after the Fault Restart Delay.

### Output Overvoltage Protection

The PI3749-x0 family is equipped with two methods of detecting an output overvoltage condition. Output Overvoltage Protection (OVP) to prevent damage to input voltage sensitive devices. If the output voltage exceeds 20% of its set regulated value as measured by the EAIN pin ( $V_{EAIN\_OV}$ ), the regulator will complete the current cycle, stop switching and issue an OVP fault. Also if the output voltage of the regulator exceeds the  $V_{OUT}$  Overvoltage Threshold ( $V_{OUT\_OVT}$ ) then the regulator will complete the current cycle, stop switching and issue an OVP fault. The system will resume operation once the output voltage falls below the OVP threshold and after Fault Restart Delay.

## Overtemperature Protection

The internal package temperature is monitored to prevent internal components from reaching their thermal maximum. If the Overtemperature Protection threshold is exceeded ( $T_{OTP}$ ), the regulator will complete the current switching cycle, enter a low power mode, set a fault flag, and will soft-start when the internal temperature decreases by more than the Overtemperature Restart Hysteresis ( $T_{OTP\_HYS}$ ).

## Pulse Skip Mode (PSM)

PI3749-x0 features a hysteretic Pulse Skip Mode to achieve high efficiency at light loads. The regulator is setup to skip pulses if  $V_{EAO}$  falls below the Pulse Skip Threshold ( $V_{EAO\_PST}$ ). Depending on conditions and component values, this may result in single pulses or several consecutive pulses followed by skipped pulses. Skipping cycles significantly reduces gate drive power and improves light load efficiency. The regulator will leave Pulse Skip Mode once the control node rises above the Pulse Skip Mode threshold ( $V_{EAO\_PST}$ ).

## Variable Frequency Operation

The PI3749-x0 is preprogrammed to a fixed, maximum, base operating frequency. The frequency is selected with respect to the required power stage inductor to operate at peak efficiency across line and load variations. The switching frequency period will stretch as needed during each cycle to accommodate low line and or high load conditions. By stretching the switching frequency period, thus decreasing the switching frequency, the ZVS operation is preserved throughout the input line voltage range maintaining optimum efficiency.

## IMON Amplifier

The PI3749-x0 provides a differential amplifier with a level shifted, SGND referenced output, the IMON Pin, which is useful for sensing input or output current on high voltage rails. A fixed gain of 20:1 is provided over a large common mode range. When using the amplifier, the ISN pin must be referenced to the common mode voltage of the ISP pin for proper operation. See Absolute Maximum Ratings for more information. If not in use, the ISN and ISP pins should be connected to SGND and the IMON pin left floating.

## I<sup>2</sup>C Interface Operation

PI3749-20 devices provide an I<sup>2</sup>C digital interface that enables the user to:

### *Device Configuration Options:*

- Dynamic  $V_{OUT}$  margining
- Programmable Sync Phase Delay

### *Fault telemetry including:*

- Input and Output Overvoltage
- Input and Output Undervoltage
- Internal Bias Supply Undervoltage
- Overtemperature Protection
- Multi Tiered Current Limit reporting



## Applications Information

### Input / Output Range Limitation

The PI3749-x0 is capable of wide step-up and step-down conversions, but high boosting ratios place thermal stress on the external inductor that may not be fully protected by the controller overtemperature shut down. For this reason boosting above 29V out when the input voltage is less than 24V is not supported.

### Output Voltage Trim

The output voltage can be adjusted by feeding back a portion of the desired output through a voltage divider to the error amplifier's input (see Figure 24). Equation 1 can be used to determine resistor values needed for the voltage divider.

$$R1 = R2 \cdot \left( \frac{V_{OUT}}{1.7} - 1 \right) \quad (1)$$

The R2 value is selected by the user; a 1.07kΩ resistor value is recommended.

If, for example, a 24V output is needed, the user can select a 1.07kΩ (1%) resistor for R2 and use equation (1) to calculate R1. Once R1 value is calculated, the user should select the nearest resistor value available. In this example, R1 is 14.03kΩ so a 14.0kΩ should be selected.

### Soft-Start Adjustment and Tracking

The TRK pin offers a means to increase the regulator's soft-start time or to track with additional regulators. The soft-start slope is controlled by an internal 47nF and a fixed charge current to provide a minimum startup time of 1.6ms (typical). By adding an external capacitor to the TRK pin, the soft-start time can be increased further. The following equation can be used to calculate the proper capacitor for a desired soft-start times:

$$C_{TRK} = \frac{(t_{TRK} \cdot I_{SS})}{1.7} - 47 \cdot 10^{-9} \quad (2)$$

Where,  $t_{TRK}$  is the desired soft-start time and  $I_{SS}$  is the  $T_{RK}$  pin source current (see Electrical Characteristics for limits).

The PI3749-x0 allows the tracking of multiple like regulators. Two methods of tracking can be chosen: proportional or direct tracking. Proportional tracking will force all connected regulators

to startup and reach regulation at the same time (see Figure 25 (a)). To implement proportional tracking, simply connect all devices TRK pins together.

For Direct Tracking, choose the regulator with the highest output voltage as the master and connect the master to the TRK pin of the other regulators through a divider (Figure 26) with the same ratio as the slave's feedback divider (see Output Voltage Trim).

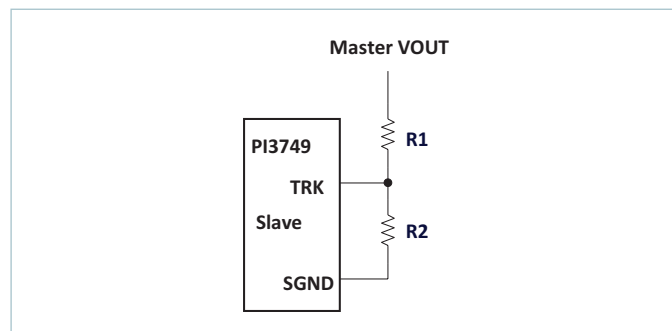


Figure 26 — Voltage divider connections for direct tracking

All connected regulators' soft-start slopes will track with this method. Direct tracking timing is demonstrated in Figure 25 (b). All tracking regulators should have their Enable (EN) pins connected together for proper operation.

### Inductor Pairing

Operations and characterization of the PI3749-x0 was performed using a 480 nH inductor, Part # HCV1206-R48-R, manufactured by Eaton. This Inductor has a form factor of 12.5mm x 10mm x 5mm. No other inductor is recommended for use with the PI3749-x0. For additional inductor information and sourcing, please contact Eaton directly.

### Thermal De-rating

Thermal de-rating curves are provided (page 14) that are based on component temperature changes versus load current, input voltage and no air flow. It is recommended to use these curves as a guideline for proper thermal de-rating. These curves represent the entire system and are inclusive to both the Picor SiP and the external inductor. Maximum thermal operation is limited by either the MOSFETs or inductor depending upon line and load conditions.

All thermal testing was performed using a 3 in. x 3 in., four 2oz. copper layers, FR4 evaluation board platform. Thermal measurements were made on the five main power devices; the four internal MOSFETs and the external inductor.

### Filter Considerations

The PI3749-x0 requires low impedance ceramic input capacitors (X7R/X5R or equivalent) to ensure proper start up and high frequency decoupling for the power stage. The PI3749-x0 will draw nearly all of the high frequency current from the low impedance ceramic capacitors when the main high side MOSFET(s) are conducting. During the time the MOSFET(s) are off, the input capacitors are replenished from the source. Table 1 shows the recommended input and output capacitors to be used for the PI3749-x0 as well as total RMS current, and input and output ripple voltages. Divide the total RMS current by the

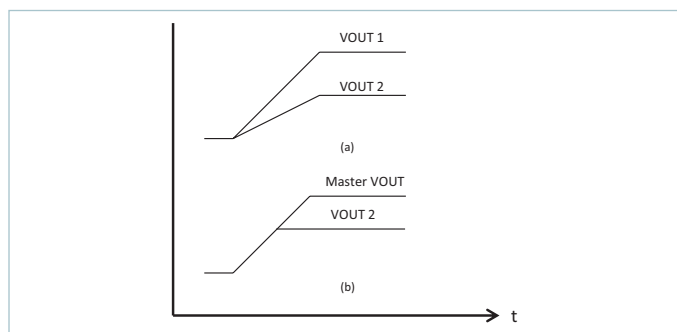


Figure 25 — PI3749-x0 tracking methods



V <sub>OUT</sub> (V)	V <sub>IN</sub> (V)	I <sub>LOAD</sub> (A)	C <sub>INPUT</sub> (see table 2)	C <sub>OUTPUT</sub> (see table 2)	C <sub>INPUT</sub> Ripple Current (I <sub>RMS</sub> )	C <sub>OUTPUT</sub> Ripple Current (I <sub>RMS</sub> )	Output Ripple (mVpp)	Input Ripple (mVpp)
12	16	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	3.55	3.65	37.1	67.5
		7			4.59	4.89	60.6	113
12	20	6	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.45	4.43	44	84.3
		9			6.08	6.32	80.5	162
12	24	6	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.68	4.36	40.2	81
		10			6.93	6.84	88	184
12	28	6	6 X 10 $\mu$ F	8 X 10 $\mu$ F	5.06	4.34	43.4	90.1
		11			7.66	7.21	95	217
12	34	7	6 X 10 $\mu$ F	8 X 10 $\mu$ F	5.78	4.64	50	125
		11			7.8	6.76	87	240
24	16	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	5.13	4.49	75.4	63.5
		7			7.08	6.07	138	114
24	20	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.28	3.91	61.6	56
		7			5.3	4.6	85	75
24	24	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.24	4.13	64	82
		7			4.7	4.5	68	88
24	28	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.55	4.4	68	105
		7			5.1	5.1	74	121
24	34	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	5.1	4.66	72.5	142
		7			5.93	5.67	83	176
28	16	6	6 X 10 $\mu$ F	8 X 10 $\mu$ F	7.18	6.5	143.5	108
		9			10.62	9.37	301	223
28	20	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	5.09	4.65	84	70
		7			6.49	5.51	122	95
28	24	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.68	4.46	82	83
		6			5.06	4.68	87	83.5
28	28	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.66	4.54	83	107.5
		7			5.31	5.16	93	119
28	34	4	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.5	4.18	77.4	130.6
		6			5.49	5.26	95	168
34	24	5	6 X 10 $\mu$ F	8 X 10 $\mu$ F	5.6	5.39	124	95
		7			6.66	5.76	148	100
34	29	4	6 X 10 $\mu$ F	8 X 10 $\mu$ F	4.5	4.5	107	107
		6			5.6	5.33	133	122
34	34	3	6 X 10 $\mu$ F	8 X 10 $\mu$ F	3.87	3.7	90.4	118
		5			5.12	4.95	124	160

**Table 1** — Recommended input and output capacitance

Part Number	Description	MFG Description
C3225X7S1H106M250AB	10 $\mu$ F Capacitor, X7S 20% 50V, 1210	TDK

**Table 2** — Capacitor manufacturer part numbers

## I<sup>2</sup>C Addressing

The PI3749-20 is hardware compatible with the NXP I<sup>2</sup>C Bus Specification Version 2.1, January 2000, in Standard Mode (100kHz) for all bus timing and voltage levels up to 5.5V. It operates as a slave on the I<sup>2</sup>C bus.

The PI3749-20 I<sup>2</sup>C interface responds to the address programmed by the two I<sup>2</sup>C Address pins, ADR1 and ADR0. The address pins are three level inputs, providing nine possible combination pairs, although only eight of these combinations are unique, as shown in table 3. Considering only the 7 bit address sub-field, the high-order address bits <6> through <4> are hardcoded to 4'b1001, while the lower order address bits <3> through <0> are modified by the ADRx pins.

ADDRx state		Resultant I <sup>2</sup> C address sub-field Sub-field bit positions <7.1>			Fully formed address write word (including lsb of the transfer set for a write)
ADR1	ADR0	Hexadecimal	Decimal	Binary	Binary
L	L	7'h48	72	7'b100_1000	8'b1001_0001
L	M	7'h49	73	7'b100_1001	8'b1001_0011
L	H	7'h4A	74	7'b100_1010	8'b1001_0101
M	L	7'h4B	75	7'b100_1011	8'b1001_0111
M	M	7'h4C	76	7'b100_1100	8'b1001_1001
M	H	7'h4D	77	7'b100_1101	8'b1001_1011
H	L	7'h4E	78	7'b100_1110	8'b1001_1101
H	M	7'h4F	79	7'b100_1111	8'b1001_1111
H	H	7'h4F	79	7'b100_1111	8'b1001_1111


**Table 3** — I<sup>2</sup>C Address selection

Note that the state of the ADRx pins is resolved on each I<sup>2</sup>C address transfer. Therefore the PI3749-20 address can be changed while the regulator is powered up and in operation.

## I<sup>2</sup>C Command Structure

Depending on the state of the read/write bit, two types of transfers are possible:

- Write: Data transferred from the I<sup>2</sup>C master to the PI3749-20 slave**  
The first byte is transmitted by the master and includes the slave address and the R/W bit set to write (as shown in the last column of table 3.)  
The second byte is also transmitted by the master and is the write data.  
The slave responds between each byte with an acknowledge bit.
- Read: Data returned from the PI3749-20 slave to the master**  
The first byte is transmitted by the master and includes the slave address but the R/W bit is set to read. The slave responds to the first byte (the address transmitted by the master) with an acknowledge bit.  
The second byte is transmitted by the slave back to the master and is the read data. The master responds after the read data byte with a not-acknowledge bit (since the PI3749-20 read data are all single byte registers).

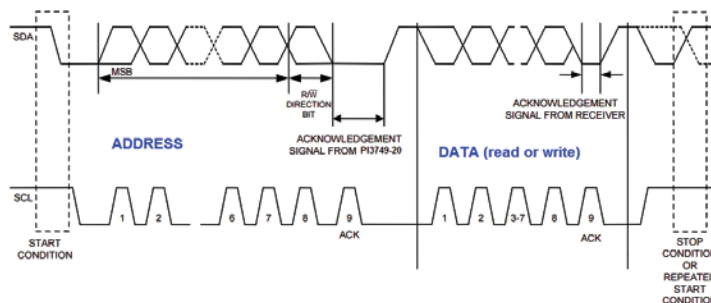

**Figure 28** — Data transfer on the I<sup>2</sup>C bus

Per the I<sup>2</sup>C standard, the master generates all serial clock pulses, and all data is transferred MSB first.

## I<sup>2</sup>C Parameter Readback

### Fault Monitoring

Register Name	Register Address	Bit <7>	Bit <6>	Bit <5>	Bit <4>	Bit <3>	Bit <2>	Bit <1>	Bit <0>
FLT2	2	TRISE	OTP	VOUT_NEG	VOUT_OV	EAIN_HI	VIN_OV	VIN_UV	VCC_UV
FLT3	3	0	0	0	0	Q1_FIL	Q3_SIL	Q3_FIL	SLOW_IL
FLTREG_CLR	4	Write only, data ignored							

**Table 4** — PI3749-20 Fault Readback/Clear Registers

The fault bits in the FLT2 and FLT3 registers are only latched when the regulator first stops operating due to a given fault type. If the regulator is already not operating (perhaps due to a fault protection or being disabled) then should a new fault condition occur, the fault bit associated with the new fault will not be registered.

Both versions of the PI3749-x0 will auto recover from any fault protection mechanism, once the fault is corrected. However in order to aid in monitoring of the regulator via the I<sup>2</sup>C fault monitoring registers, when a fault occurs, the associated fault bit(s) will set and latch until they are explicitly cleared by the I<sup>2</sup>C host using the FLTREG\_CLR register.

A write to the FLTREG\_CLR register address will clear all latched fault register bits.

Fault Bit Name	Fault Bit Location	Fault Destination
TRISE	FLT2, Bit<7>	Overtemperature Protection: The predicted maximum hot-spot temperature, based on measured temperature and loading, exceeded the maximum safe operating temperature.
OTP	FLT2, Bit<6>	Overtemperature Protection: The internal measured temperature exceeded the maximum safe operating temperature.
VOUT_NEG	FLT2, Bit<5>	V <sub>OUT</sub> negative fault. The output voltage was below ground.
VOUT_OV	FLT2, Bit<4>	Output Overvoltage protection.
EAIN_HI	FLT2, Bit<3>	Current Limit: Overload Timeout.
VIN_OV	FLT2, Bit<2>	Input Overvoltage Lockout.
VIN_UV	FLT2, Bit<1>	Input Undervoltage Lockout.
VCC_UV	FLT2, Bit<0>	V <sub>CC</sub> undervoltage. The internal bias supply faulted due to undervoltage.
Q1_FIL	FLT3, Bit<3>	Current Limit: Fast current limit (Q1) The peak current through Q1 and the inductor was higher than the maximum current allowed.
Q3_SIL	FLT3, Bit<2>	Current Limit: Slow current limit (Q3)
Q3_FIL	FLT3, Bit<1>	Current Limit: Fast current limit (Q3) The peak current through Q3 and the inductor was higher than the maximum current allowed.
SLOW_IL	FLT3, Bit<0>	Current Limit: Slow current limit.

**Table 5** — Fault register bit summary

## I<sup>2</sup>C Volatile Addresses for Parameter Programming

Register Name	Register Address	Readback capable?	Bit <3>	Bit <2>	Bit <1>	Bit <0>
MRGN	5	Yes	MRGN_ENA	MRGN<2>	MRGN<1>	MRGN<0>

**Table 6** — PI3749-20 Parameter Programming Volatile Registers

## MRGN: Margin Control


By default, output voltage margining is disabled, corresponding to B3 being cleared. In this case, the reference to the error amplifier is at its nominal value of 1.700V. When margining is enabled, the reference can be modified in 85 mV steps according to Table 7.

MRGN state	MRGN data	Resultant Margin Function	
MRGN_ENA<3>	MRGN<2..0>	Margin active?	Reference Voltage (V)
1	100	Yes	1.360
1	101	Yes	1.445
1	110	Yes	1.530
1	111	Yes	1.615
0	xxx	No (data ignored), default	1.700
1	000	Yes	1.785
1	001	Yes	1.870
1	010	Yes	1.955
1	011	Yes	2.040


**Table 7** — Margin control register programming

The MRGN state is always controlled by four bit wide volatile register. At power up, the register always resets to 4'b0000. The MRGN address can be freely read and written, as there are no one-time programmable fuses involved.


## Package Drawings

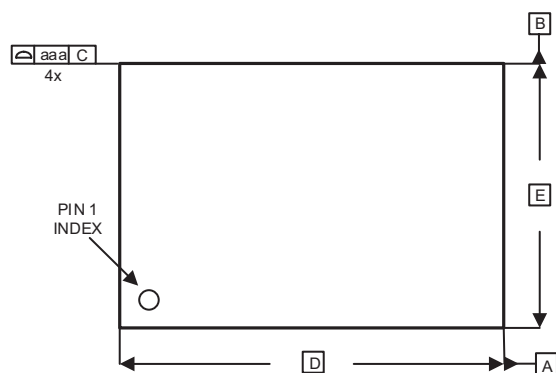

PACKAGE TOP VIEW

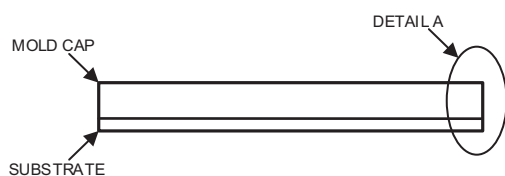


PACKAGE SIDE VIEW

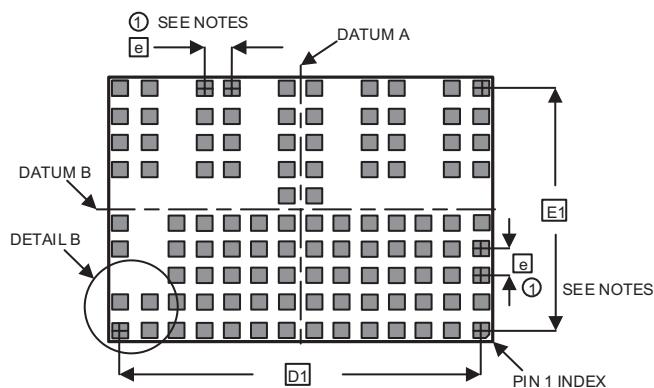


PACKAGE BOTTOM VIEW

## NOTES

- ① 'e' REPRESENTS THE BASIC TERMINAL PITCH. SPECIFIES THE TRUE GEOMETRIC POSITION OF THE TERMINAL AXIS.
- ② DIMENSION 'b' APPLIES TO METALLIZED PAD OPENING.
- ③ DIMENSION 'A' INCLUDES PACKAGE WARPAGE.
- ④ EXPOSED METALLIZED PADS ARE CU PADS WITH SURFACE FINISH PROTECTION.
- ⑤ ALL DIMENSIONS IN MILLIMETERS.

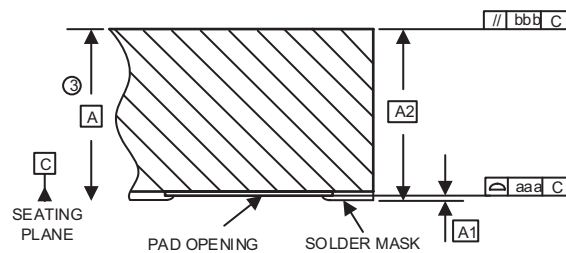

DETAIL A

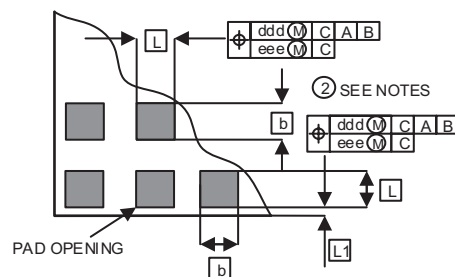


DETAIL B



SYMBOL	MIN	NOM	MAX
A	2.49	2.56	2.63
A1	—	—	0.04
A2	—	—	2.59
b	0.50	0.55	0.60
L	0.50	0.55	0.60
D	14.00 BSC		
E	10.00 BSC		
D1	13.00 BSC		
E1	9.00 BSC		
e	1.00 BSC		
L1	0.175	0.225	0.275
aaa			0.10
bbb			0.10
ccc			0.08
ddd			0.10
eee			0.08

DIMENSIONS

## Receiving PCB Pattern Design Recommendations

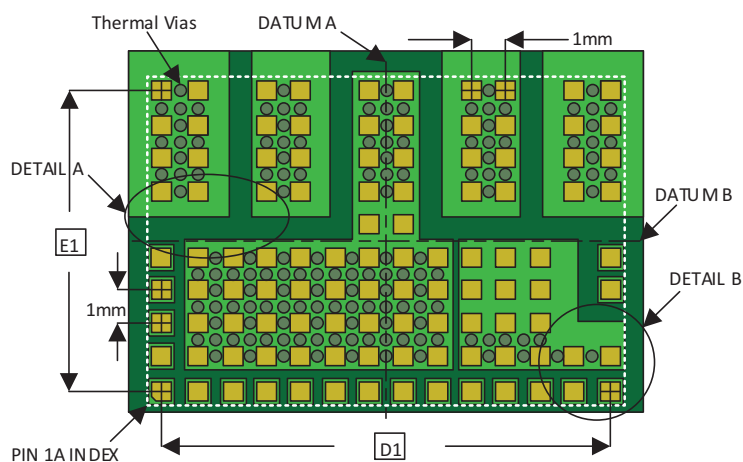

PACKAGE PCB FOOTPRINT TOP VIEW

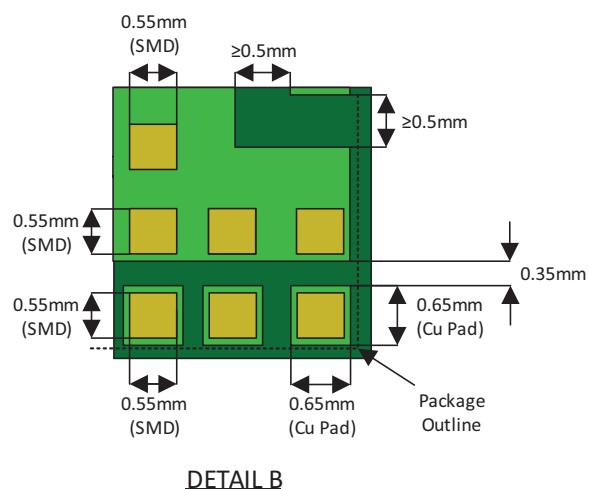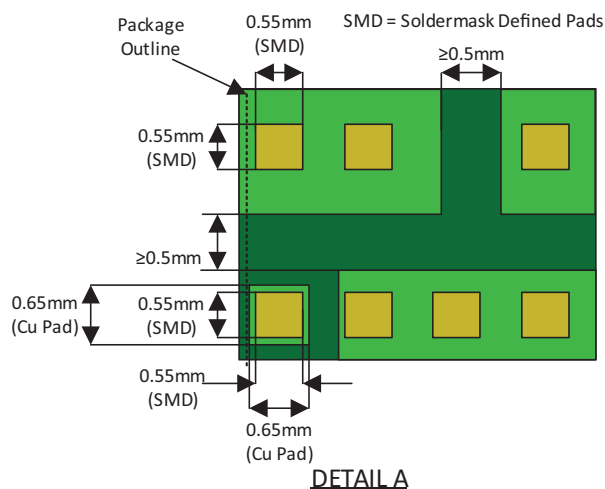



## Revision History

Revision	Date	Description	Page Number(s)
1.0	04/13/15	Initial Release	n/a
1.1	07/14/15	Updated conditions column Added additional specifications Clarified parameters and updated typical Corrected labels Corrected labels Inductor Pairing updated	7 8 9 10 15 18
1.2	08/03/15	Inductor value corrected	7-9
1.3	09/03/15	Added I <sup>2</sup> C capability throughout	all
1.4	10/??/15	Added documentation for I <sup>2</sup> C capability Changed frequency units for readability Reformatted for readability	1, 4, 6, 7, 8, 9 & 20 11 19
1.5	04/??/15	Updated VDIFF description	4

## **Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

## **Vicor's Standard Terms and Conditions**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

## **Product Warranty**

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

## **Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

## **Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

The products described on this data sheet are protected by the following U.S. Patents Numbers:

RE40,072; 6,788,033; 7,154,250; 6,421,262; 8,669,744; and for use under: 6,984,965; 6,975,098.

**Vicor Corporation**  
25 Frontage Road  
Andover, MA 01810 USA

**Picor Corporation**  
51 Industrial Drive  
North Smithfield, RI 02896 USA

### **email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)

Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)