

PI2EQX5984

5.0Gbps 4-Lane PCIe® 2.0 ReDriver™ with Equalization, Emphasis, & I²C Control


Pericom Semiconductor's PI2EQX5984 is a low power, PCIe® compliant signal ReDriver™. The device provides programmable equalization, amplification, and de-emphasis by using 8 select bits, to optimize performance over a variety of physical mediums by reducing Inter-symbol interference.

PI2EQX5984 supports eight 100-Ohm Differential CML data I/O's between the Protocol ASIC to a switch fabric, across a backplane, or extends the signals across other distant data pathways on the user's platform.

The integrated equalization circuitry provides flexibility with signal integrity of the PCI Express signal before the ReDriver™, whereas the integrated de-emphasis circuitry provides flexibility with signal integrity of the signal after the redriver.

In addition to providing signal re-conditioning, Pericom's PI2EQX5984 also provides power management Stand-by mode operated by a Bus Enable pin.

Block Diagram

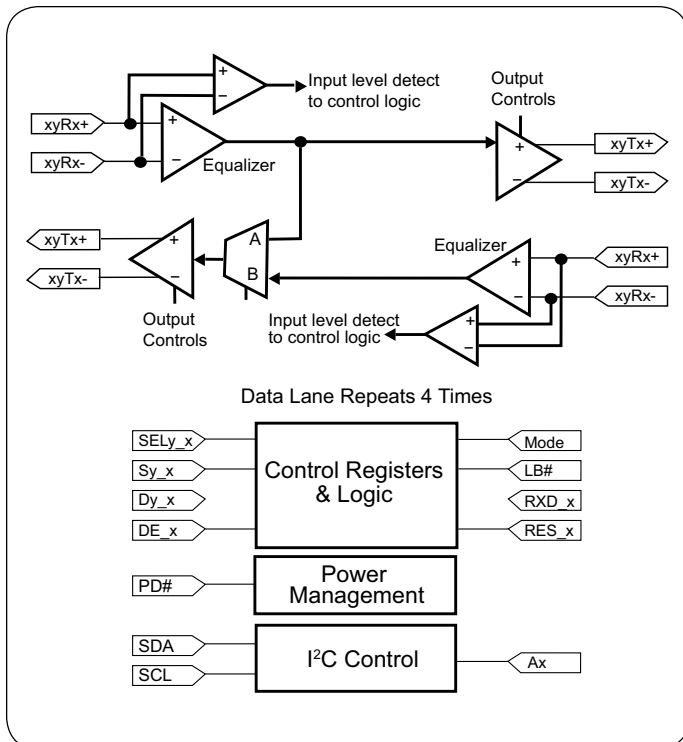

Features

- Up to 5.0Gbps PCI Express® 2.0 Serial ReDriver
- Supporting 8 differential channels or 4 lanes of PCIe Interface
- I²C configuration controls (3.3V tolerant)
- Adjustable receiver equalization and transmitter de-emphasis and output levels
- Variable input an output termination
- 1:2 channel broadcast
- Channel loop-back/Mux and Demux Mode
- Electrical Idle fully supported
- Receiver detect and individual output control
- Fine adjustment of electrical idle threshold via I²C
- Single supply voltage, $1.2V \pm 0.05V$
- Power down modes
- Industrial Temp support, $-40^{\circ}C \sim +85^{\circ}C$
- Packaging: 72-contact TQFN, Pb-free & Green

Figure1

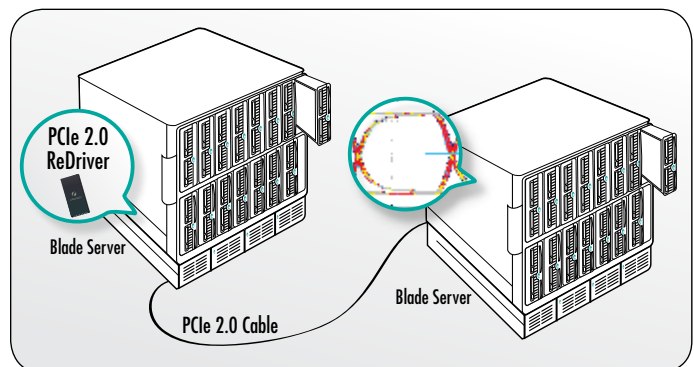


Figure1

Redrivers with emphasis and equalization signal conditioning technology ensure the integrity of high-frequency PCIe signals by opening closed signal eyes to recover data and meet strict compliance testing requirements. Increased signal margin also supports longer drive lengths over even low-quality cables.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:

[PI2EQX3232AZDEX](#) [PI2EQX4951SLZDEX](#) [PI2EQX8864AZLEX](#) [PI2EQX3202BNBE](#) [PI2EQX5904NJEX](#)
[PI2EQX8864AZLE](#) [PI2EQX3211BHE](#) [PI3EQX5701ZDEX](#) [PI2EQX5804DNJEX](#) [PI2EQX6874ZFE](#) [PI2EQX3201BZFE](#)
[PI2EQX6812ZHEX](#) [PI2EQX5984ZLEX](#) [PI2EQX6874ZFEX](#) [PI2EQX5984ZLE](#) [PI2EQX3201BZFEX](#) [PI2EQX6814NJEX](#)
[PI3EQX8984ZLE](#) [PI3EQX8908ZFE](#) [PI2EQX8804ANJEX](#) [PI2EQX6741SLZDE](#) [PI2EQX5964ZFE](#) [PI74LPT244LEX](#)
[PI74FCT244ATQEX](#) [PI74FCT2541ATQEX](#) [PI74AVC+16244AEX](#) [PI74FCT2244TQE](#) [PI74FCT541ATSEX](#)
[PI74FCT541ATQE](#) [PI90LVR3810AEX](#) [PI74FCT244CTSEX](#) [PI74LCX16244AEX](#) [PI74FCT2541TQE](#)
[PI74FCT2244ATSE](#) [PI74LPT244AHX](#) [PI74FCT244TQEX](#) [PI74FCT541CTLE](#) [PI74FCT244DTQEX](#)
[PI74LCX16244AE](#) [PI74FCT3244LEX](#) [PI74LPT244ASEX](#) [PI74FCT244CTQEX](#) [PI74FCT2541TSE](#) [PI74LCX16244VEX](#)
[PI74LCX16244VE](#) [PI74FCT244TLEX](#) [PI74FCT2244ATQE](#) [PI2EQX3201BLZFE](#) [PI2EQX5804CNJE](#)
[PI2EQX4951SLZDE](#) [PI2EQX4432DZDEX](#) [PI2EQX5904NJE](#) [PI2EQX862XUAEX](#) [PI3EQX8904ZHE](#)
[PI3EQX8908AZFE](#) [PI3EQX8908AZFEX](#) [PI3EQX8904ZHEX](#) [PI2EQX8814AFNJEX](#) [PI74LVTCH16244AE](#)
[PI2EQX8814AFNJE](#) [PI74VCX16240AE](#) [PI2EQX3231BLZHEX](#) [PI74ALVCH162244VE](#) [PI2EQX3202ANBEX](#)
[PI2EQX3201AZFE](#) [PI2EQX3202ANBE](#) [PI3EQXDP8121ZBE](#) [PI2EQX8814ANJEX](#)