


Dimensions: mm (in.)

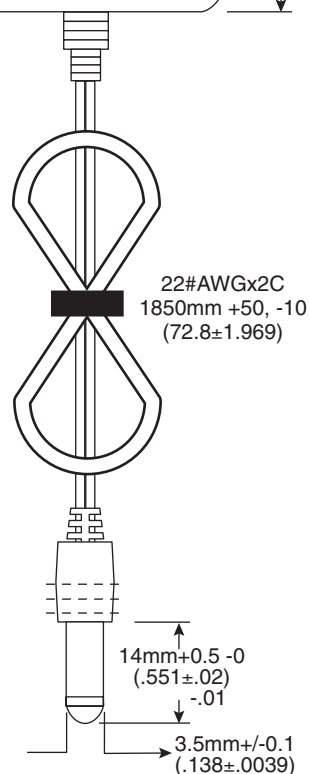

## ■ SPECIFICATIONS FOR PRIMARY:

- Input Voltage 120VAC, 60Hz
- DC Resistance +/- 15%: 266.5 OHM

## ■ SPECIFICATIONS FOR SECONDARY OUTPUT:

- Open Circuit Voltage +/- 5%: 11.0VAC
- Loaded Voltage +/- 5%: 9VAC@500mA

## ■ FEATURES:

- Insulation Resistance:  
PRI Winding SEC Winding - 100M ohm, 500VDC
- Dielectric Strength:  
PRI Winding SEC Winding - 1500VAC@2mA 1Minute  
PRI Winding CORE: 1500VAC@2mA 1Minute  
SEC Winding CORE: 500VAC@2mA 1Minute

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Xicon:

412-209051