


Solid Doors **ATO**

Steel doors are made from 14 and 16 gauge steel, and are painted RAL 7035 textured gray (except stainless steel). Patented removable door bar system is included on doors taller than 700mm and wider than 400mm. Optional data pockets, door stops, grounding kits and 180 degree hinges are available. Hinge side is reversible.




A flush bezel with slotted insert operates the 3-point latching system. Doors for 700mm frames have 2-point latching. Hidden hinges (130 degree swing) permit attachment to the front or back of each enclosure frame. Hinges have patented easy slide retained hinge pins. Door gasket is foamed-in-place urethane to provide a resilient seamless seal. Two grounding studs are furnished. All mounting hardware is included.

NOTE: DataCom doors are available in solid or louvered style and are 16 gauge.

DataCom doors include a single flush keylocking trigger latch.

DataCom patent pending.

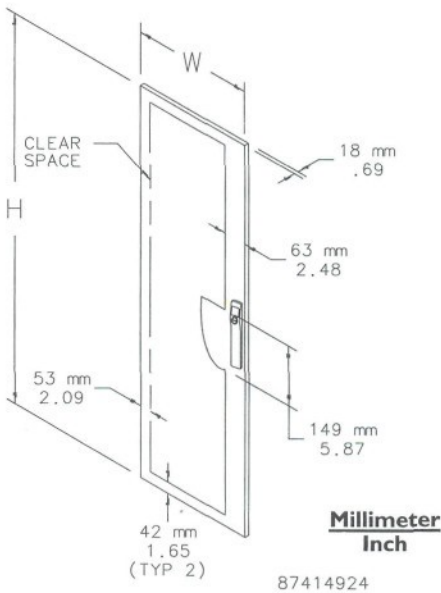

Catalog Number		Medium Performance EMI/RFI	High Performance EMI/RFI	Stainless Steel	(All 16 ga.) DataCom		Gauge	Fits Frame A x B	H x W
Steel					Solid	Louver			
P-DS76R	P-DS76RHF2	P-DS76RHF1	P-DS76RSS	—	—	—	16	700 x 600	639 x 592 (25.16 x 23.31)
P-DS78R	P-DS78RHF2	P-DS78RHF1	P-DS78R	—	—	—	14	700 x 800	639 x 792 (25.16 x 31.18)
P-DS146	P-DS146HF2	P-DS146HF1	P-DS146SS	P-DS146D	P-DL146	—	16	1400 x 600	1339 x 592 (52.72 x 23.31)
P-DS148	P-DS148HF2	P-DS148HF1	P-DS148SS	P-DS148D	P-DL148	—	14	1400 x 800	1339 x 792 (52.72 x 31.18)
P-DS165	—	—	—	—	—	—	16	1600 x 500	1539 x 492 (60.59 x 19.69)
P-DS166	P-DS166HF2	P-DS166HF1	P-DS166SS	P-DS166D	P-DL166	—	16	1600 x 600	1539 x 592 (60.59 x 23.31)
P-DS167	P-DS167HF2	P-DS167HF1	—	P-DS167D	P-DL167	—	16	1600 x 700	1539 x 692 (60.59 x 27.24)
P-DS168	P-DS168HF2	P-DS168HF1	P-DS168SS	P-DS168D	P-DL168	—	14	1600 x 800	1539 x 792 (60.59 x 31.18)
P-DS185	—	—	—	—	—	—	16	1800 x 500	1739 x 492 (68.46 x 19.69)
P-DS186	P-DS186HF2	P-DS186HF1	P-DS186SS	P-DS186D	P-DL186	—	16	1800 x 600	1739 x 592 (68.46 x 23.31)
P-DS187	P-DS187HF2	P-DS187HF1	—	P-DS187D	P-DL187	—	16	1800 x 700	1739 x 692 (68.46 x 27.24)
P-DS188	P-DS188HF2	P-DS188HF1	P-DS188SS	P-DS188D	P-DL188	—	14	1800 x 800	1739 x 792 (68.46 x 31.18)
P-DS1810	P-DS1810HF2	P-DS1810HF1	P-DS1810SS	—	—	—	14	1800 x 1000	1739 x 992 (68.46 x 39.06)
P-DS204	—	—	—	—	—	—	16	2000 x 400	1939 x 392 (76.34 x 15.75)
P-DS205	—	—	—	—	—	—	16	2000 x 500	1939 x 492 (76.34 x 19.69)
P-DS206	P-DS206HF2	P-DS206HF1	P-DS206SS	P-DS206D	P-DL206	—	16	2000 x 600	1939 x 592 (76.34 x 23.31)
P-DS207	P-DS207HF2	P-DS207HF1	—	P-DS207D	P-DL207	—	16	2000 x 700	1939 x 692 (76.34 x 27.24)
P-DS208	P-DS208HF2	P-DS208HF1	P-DS208SS	P-DS208D	P-DL208	—	14	2000 x 800	1939 x 792 (76.34 x 31.18)
P-DS2010	P-DS2010HF2	P-DS2010HF1	P-DS2010SS	—	—	—	14	2000 x 1000	1939 x 992 (76.34 x 39.06)
P-DS225	—	—	—	—	—	—	16	2200 x 500	2139 x 492 (84.21 x 19.69)
P-DS226	P-DS226HF2	P-DS226HF1	P-DS226SS	—	—	—	16	2200 x 600	2139 x 592 (84.21 x 23.31)
P-DS227	P-DS227HF2	P-DS227HF1	—	—	—	—	16	2200 x 700	2139 x 692 (84.21 x 27.24)
P-DS228	P-DS228HF2	P-DS228HF1	P-DS228SS	—	—	—	14	2200 x 800	2139 x 792 (84.21 x 31.18)
P-DS2210	P-DS2210HF2	P-DS2210HF1	—	—	—	—	14	2200 x 1000	2139 x 992 (84.21 x 39.06)

Inch dimensions in ().

DataCom Perforated Doors **ATO**

These doors provide virtually all the strength of solid doors, but with the added ventilation needed to keep voice/data networking equipment operating optimally. Locking trigger latch included. RAL 7035 textured gray finish.

Catalog Number	A x B	Fits Frame H x W
P-D206V	2000 x 600	1939 x 592



NEMA



EIA

Bulletin
P20