



Features

- Carbon element
- Plain or knurled shaft option
- Metal bushing
- Metal shaft
- Rear solder lugs
- Compact size
- Dual gang option



PDB181-GTR Series - 17 mm Guitar Potentiometer

Electrical Characteristics

Taper..... Linear, audio
Standard Resistance Range
..... 10 K ohms to 1 M ohms
Standard Resistance Tolerance..... $\pm 20\%$
Residual Resistance..... 1 % max.


Environmental Characteristics

Operating Temperature
..... -10°C to $+50^{\circ}\text{C}$
Power Rating
Linear..... 0.2 watt
Dual Section 0.125 watt
Audio..... 0.1 watt
Dual Section 0.06 watt
Maximum Operating Voltage
Linear..... 200 V
Audio..... 150 V
Sliding Noise..... 47 mV max.


Mechanical Characteristics

Mechanical Angle $300^{\circ} \pm 5^{\circ}$
Rotational Torque 10 to 150 gf-cm
Stop Strength..... 5 kg-cm min.
Rotational Life..... 15,000 cycles
Soldering Condition
..... 260°C max. within 3 seconds
Hardware Two flat washers and
two mounting nuts supplied
per potentiometer

Derating Curve



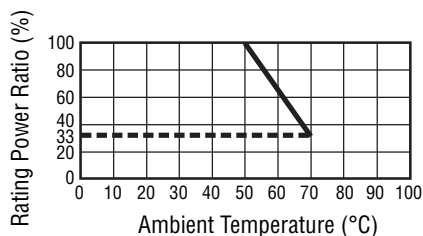


Hardware

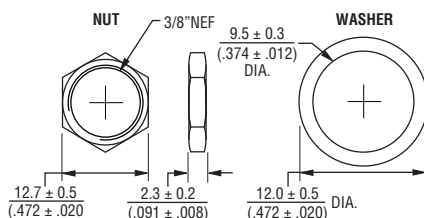


Product Dimensions




PDB181-GTR01
PDB181-GTR02

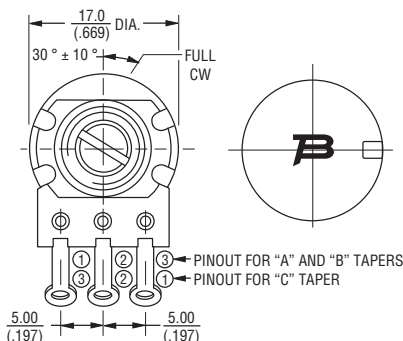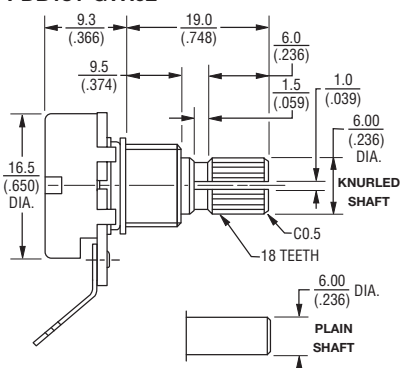

PDB18x-GTR03
PDB18x-GTR04

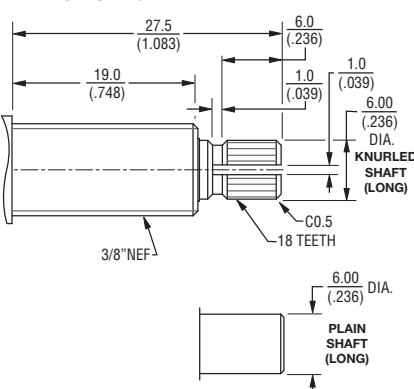

PDB182-GTR01
PDB182-GTR02

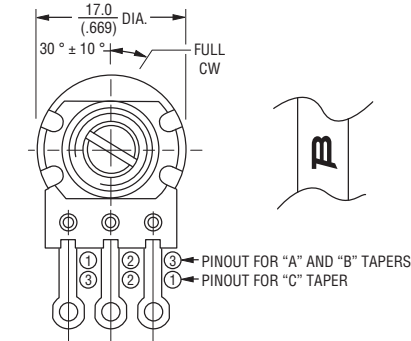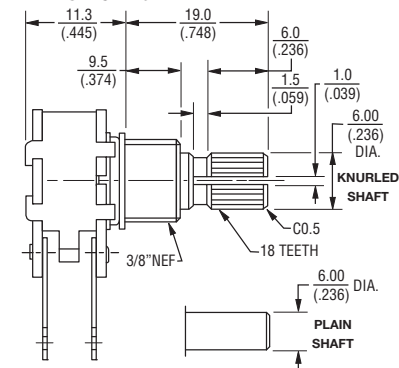

TOLERANCES:

$$\text{UNDER } 10.0 = \frac{+0.3}{(.394)} = \frac{\pm 0.12}{(.394 \sim 3.937)} = \frac{\pm 0.5}{(\pm 0.20)}$$

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Additional Features


- Variety of resistance values
- Audio or linear taper option
- RoHS compliant*

PDB181-GTR Series - 17 mm Guitar Potentiometer


BOURNS®

Taper Charts


A Series Tapers

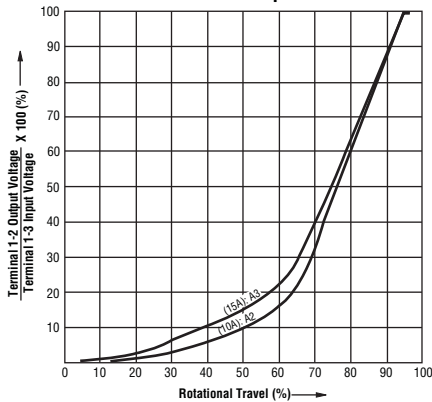

B0 Taper

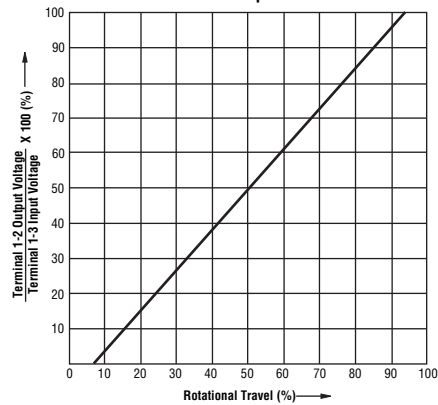


C2 Taper

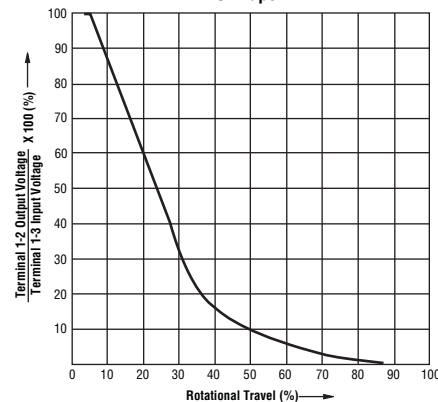


Circuit

Single Gang



Dual Gang



How to Order

PDB18 1 - GTR 01 - 103 A2

Model _____
 Number of Sections _____
 1 = Single Section
 2 = Dual Section
 Guitar Pot Designator _____
 Configuration _____
 01 = Knurled Shaft/Solder Lugs
 02 = Plain Shaft/Solder Lugs
 03 = Knurled Shaft (Long)/Solder Lugs
 04 = Plain Shaft (Long)/Solder Lugs
 Resistance Code (See Table) _____
 Resistance Taper (See Taper Charts) _____

Standard Resistance Table

Resistance (Ohms)	Resistance Code
10,000	103
25,000	253
50,000	503
100,000	104
250,000	254
300,000	304
500,000	504
1,000,000	105

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

EMEA: Tel: +36 88 520 390 • Fax: +36 88 520 211

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

REV. 11/15

Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[PDB182-GTRB1-254MN](#) [PDB182-GTRB1-504MN](#) [PDB182-GTRB2-254MN](#) [PDB182-GTRB2-504MN](#) [PDB181-GTR03-504C2](#) [PDB181-GTR01-504C2](#) [PDB181-GTR02-254C2](#) [PDB181-GTR04-254C2](#) [PDB181-GTR03-504A2](#) [PDB181-GTR03-254A2](#) [PDB181-GTR01-254C2](#) [PDB181-GTR02-504C2](#) [PDB181-GTR04-504A2](#) [PDB181-GTR04-504C2](#) [PDB181-GTR04-254A2](#) [PDB181-GTR03-254C2](#) [PDB181-GTR01-504A](#) [PDB181-GTR01-254B](#) [PDB181-GTR01-304A](#) [PDB181-GTR01-254A](#) [PDB182-GTR01-504A](#) [PDB181-GTR01-103A2](#) [PDB181-GTR01-103B0](#) [PDB181-GTR01-105A2](#) [PDB181-GTR01-253A2](#) [PDB181-GTR01-254A2](#) [PDB181-GTR01-254B0](#) [PDB181-GTR01-304A2](#) [PDB181-GTR01-504A2](#) [PDB182-GTR01-104B0](#) [PDB182-GTR01-504A2](#) [PDB181-GTR02-254A2](#) [PDB181-GTR02-504A2](#) [PDB182-GTR01-254A2](#) [PDB182-GTR01-103A2](#) [PDB182-GTR01-253B0](#) [PDB181-GTR01-504B0](#) [PDB182-GTR02-103A2](#) [PDB182-GTR01-503B0](#) [PDB182-GTRB2-253MN](#) [PDB181-GTR02-104B0](#) [PDB181-GTR01-503B0](#) [PDB181-GTR02-105A2](#) [PDB181-GTR03-253A2](#) [PDB182-GTRB1-104MN](#) [PDB182-GTRB1-253MN](#) [PDB182-GTRB1-503MN](#)