



## 40W Constant Current LED Driver PDA040B Waterproof LED Driver Non-Dimming



### Features

- Class 2 Output per UL1310
- OVP, OCP, Over-Load and Short-Circuit Protection & Brownout Protection
- IP67 Rated
- $\geq 0.9$  Power Factor Correction & THD  $< 20\%$

### Applications

- Down lights
- Area Lights
- Architectural lighting

### Safety Approvals

- cUL/UL 8750
- Class 2 Output per UL1310
- CE
- IEC/EN61347-1, IEC/EN61347-2-13

### Mechanical Characteristics

- Length: 162.5mm (6.39in)
- Width: 43mm (1.69in)
- Height: 32mm (1.26in)
- Weight: 342g (12.1oz)

### Output Specifications

Model	DC Output Voltage			Output Current	Output Power
	Min.	Typ.	Max.		
PDA040B-700B	37.8V	-	54V	700mA	38W
PDA040B-1A0B	26.6V	-	38V	1050mA	40W
PDA040B-1A4B	18.2V	-	26V	1400mA	37W

PhiHong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**INPUT:****AC Input Voltage Rating**

100VAC to 277VAC

**AC Input Frequency**

47~63Hz

**Maximum Input Current** $\leq 0.8A$ **Leakage Current**

0.25mA maximum

**Power Factor** $\geq 0.9$ **THD**

&lt; 20%

**OUTPUT:****Output Current Ripple**

&lt;40%

**Efficiency**

Model	Typical Efficiency
PDA040B-700B	89%
PDA040B-1A0B	88%
PDA040B-1A4B	88%

**Environmental:****Temperature**

Operation case 75°C

Non-operation -40 to +80°C

Operating Humidity 20 to 95%

\*Output derates from 50°C to 62°C Ta

**EMC**

FCC 47 Part 15 Class B, EN55015 Class B

**Immunity**

IEC61000-4-2

IEC61000-4-4

IEC61000-4-5

IEC61000-4-11

**Dielectric Withstand (Hi-pot) Test**

Primary to secondary: 3000VAC for 1 minute, 10mA

**Insulation Resistance**

Primary to secondary: &gt;10M Ohm 500VDC, 1 Minute

**FEATURES:****Short-Circuit Protection**

The PSU will withstand a short circuit across the outputs without damage

**Input Over Current Protection**

The input power line will be fused with a 2A/300V fuse

**Output Over-voltage Protection**


Auto shutdown

**Input / Output Connections**


Position	Terminal Color	Specification	Length
Input	Black	AWG16 Solid Wire	350mm
	White	AWG16 Solid Wire	350mm
Output	Red	AWG18 Solid Wire	350mm
	Blue	AWG18 Solid Wire	350mm

**Warranty**


5 Years

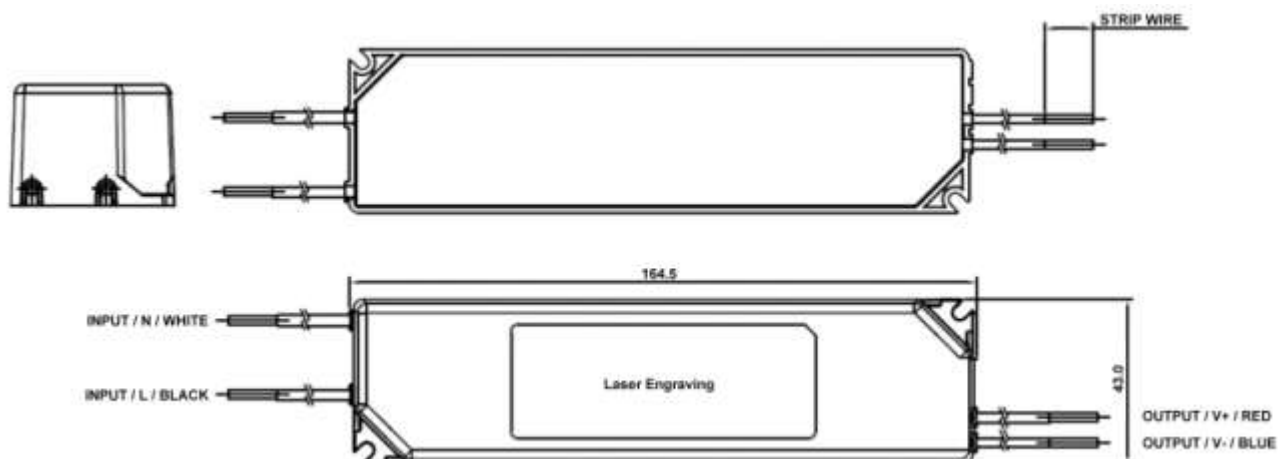**Dimension Diagram unit: mm**


Power Factor vs. Load

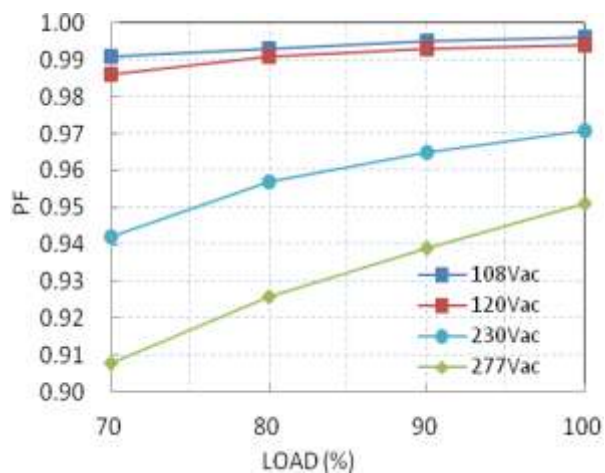


Total Harmonic Distortion vs. Load

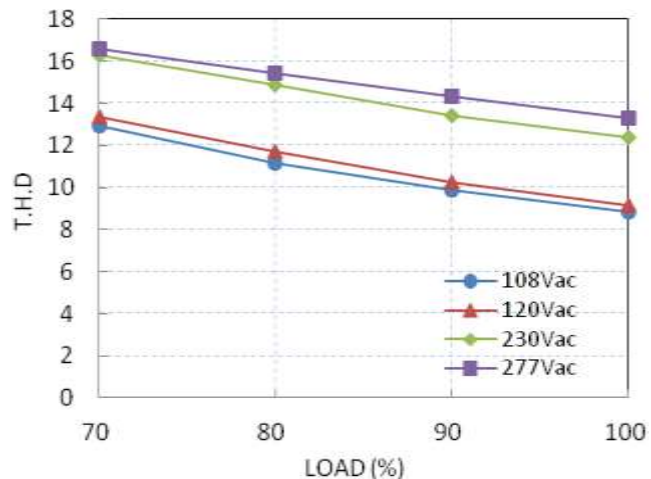

Lifetime vs. Tc

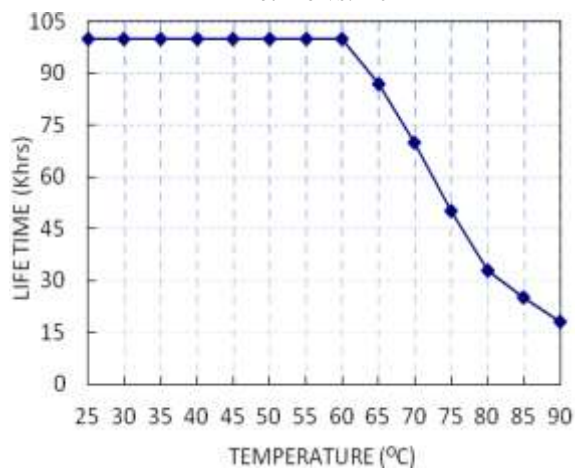


Efficiency vs. Load (PDA040B-700B)

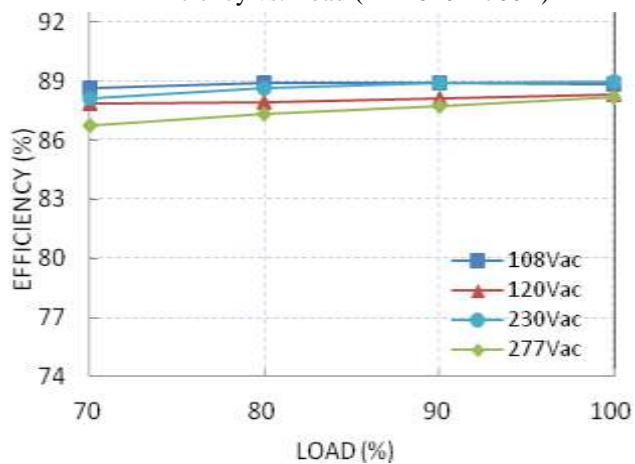


## Temperature Rating

Static Characteristic: Load vs. Input Voltage

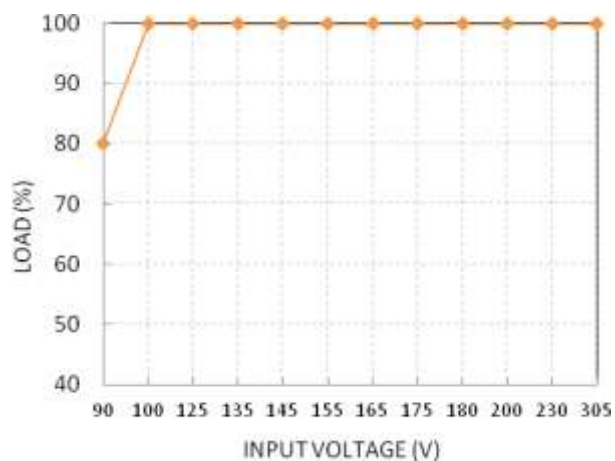

Derating Curve: Load vs Ta

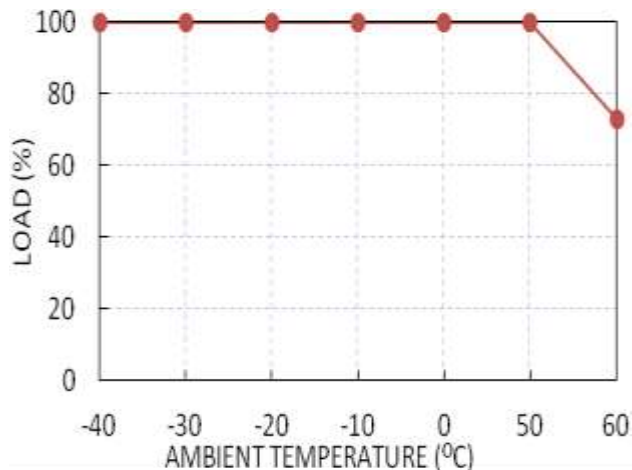

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phihong:

[PDA040B-700B-R](#) [PDA040B-1A0B-R](#) [PDA040B-1A4B-R](#)