WWW.PHIHONG.COM



6W Adapter Style Constant Current LED Driver PDA006A Wall Plug LED Power Supply





Features

- Low Profile Design
- OVP, IOCP, Over-Load and Short-Circuit Protection
- ≥0.9 Power Factor Correction
- Low Cost Fixed Wall Plug

- IP20 Rated
- SELV Compliant
- UL 8750 Compliant
- Very Low Leakage
- Class 2 Output

Applications

Indoor Lighting

• Desk Lighting

Safety Approvals

cUL/UL

Mechanical Characteristics

Length: 66.5mm (in)Width: 31mm (in)

Height: 38mm (in)Weight: 40g (1.41oz)

Output Specifications

Model	DC Output Voltage			Output	Output
	Min.	Typ.	Max.	Current	Power
PDA006A-350S-R	9V	-	17V	350mA	6W
PDA006A-700S-R	5V	-	8.6V	700mA	6W
PDA006A-1A0S-R	4V	_	6V	1000mA	6W

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

PDA006A Characteristics

WWW.PHIHONG.COM

INPUT:

AC Input Voltage

90 to 132VAC

Nominal AC Input Voltage

110 to 120VAC

Leakage Current

< 0.25mA at 120VAC and maximum load

Maximum Input Current

≤250mA at full load, 110VAC

No-Load Power Draw

<300mW at 115VAC, 60Hz

OUTPUT:

Total Output Power

6W maximum

Efficiency

≥73% at nominal input voltage, full load

Meets requirements for Level V efficiency marking

Power Factor

≥0.9 at nominal input voltage, full load

ENVIRONMENTAL:

Operating Temperature 0 to +40°C Storage Temperature -40 to +85°C

Operating Humidity 10 to 95%

Ingression Protection

IP20; plastic housing

Dimension Diagram Unit:mm

EMC

FCC Part 15 Class B

Immunity

EN61000-4-2

EN61000-4-4

EN61000-4-5

EN61000-4-11

Isolation Test

Primary to Secondary: 3000VAC, <10mA, 1 minute

Insulation Resistance

Primary to Secondary: 500VDC, >5M ohm, 1

minute

FEATURES:

Input Current Protection

The input power line will be fused with a

1W/10Ohm fuse resistor

Short Circuit

Auto restart without damage

Output Over-Voltage Protection

Output should not exceed voltage limit, auto shut


down

AC Input

Fixed Blade (North America)

DC Output

2.1mm x 5.5mm x 9.5mm center positive barrel

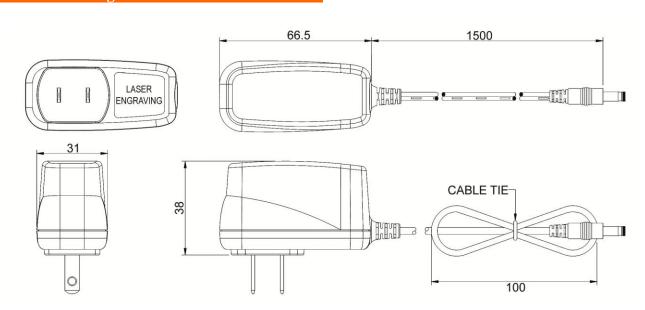

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phihong:

PDA006A-1A0S-R PDA006A-350S-R PDA006A-700S-R