



光耦合器 - 晶闸管输出 (接上页)



图	标准电压	输入		输出			最大隔离电压 (Vrms)	封装类型	Digi-Key 零件编号	剪切带 单价			Digi-Key 零件编号	带卷		Sharp 零件编号
		最小	最大	最大电压 VDRM	最大电流 IT (RMS) (mA)	最大保持电流 (mA)				1	10	100		数量	价格	
6	1.2	10	50	600	50	3.5	3,750	4-SMD	425-2564-1-ND◆§*	1.14	.95	.76	425-2564-2-ND◆§*	3,000	505.40/M	S2S4A00F
	1.2	10	50	600	50	3.5	3,750	4-SMD	425-2423-1-ND◆§*	1.08	.90	.72	425-2423-2-ND◆§*	750	405.00	S2S4BY0F
7	1.2	3	50	600	100	3.5	5,000	6-Dip	425-2705-1-ND◆§*	.84	.70	.56	425-2705-2-ND◆§*	1,000	392.00	PC3SD21YXPLF
	1.2	3	50	600	100	3.5	5,000	6-Dip	425-2704-1-ND◆§*	1.23	1.03	.82	425-2704-2-ND◆§*	1,000	574.00	PC3SD21YXPDF
	1.2	5	50	800	100	3.5	5,000	6-SMD	425-2537-1-ND◆§*	1.44	1.20	.96	425-2537-2-ND◆§*	1,000	672.00	PC4SD21YXPCF
	1.2	—	10µA	800	100	3.5	5,000	6-SMD	425-2658-1-ND◆§*	1.23	1.03	.74	—	—	—	PC4SD21YXPDF
8	1.2	3	50	600	100	3.5	5,000	6-SMD	425-2671-1-ND◆§*	1.05	.92	.75	—	—	—	PC3SD21YXPEF
	1.2	10	50	400	100	3.5	5,000	6-SMD	425-2573-1-ND◆	.72	.60	.44	425-2573-2-ND◆	1,000	392.00	PC2SD11NXP

◆ 符合 RoHS 规范要求 * 内置过零电路 § DIN EN60747-5-2

光耦合器

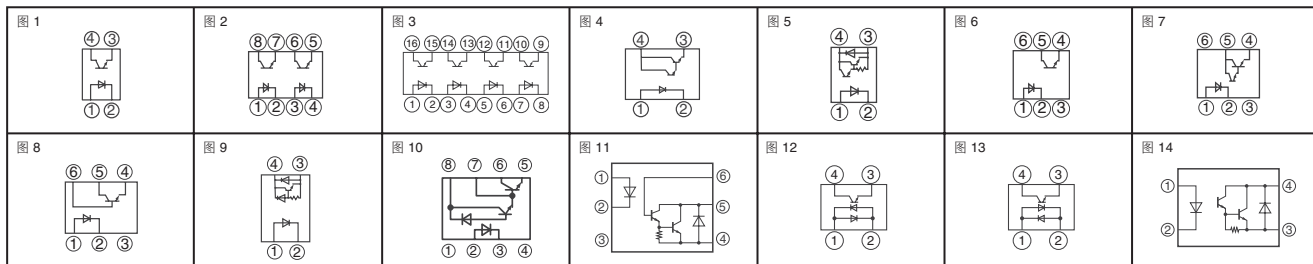


图	输出		电流传输比				隔离电压 (Vrms)	封装类型	Digi-Key 零件编号	单价			Sharp 零件编号
	最大 V CEO (V)	最大 IC (mA)	最小 (%)	最大 (%)	@ IF (mA)	@ VCE (V)				1	10	100	
1	35	50	10	100	1	0.4	5,000	4-SMD	425-1473-5-ND	.85	.72	.51	PC818I
	35	50	10	100	1	0.4	5,000	4-Dip	425-1475-5-ND§	1.22	1.07	.87	PC818Y
	35	50	20	200	1	5	5,000	8-Dip	425-1476-5-ND†	2.45	2.15	1.75	PC823
	35	50	60	120	1	0.4	5,000	4-SMD	425-1435-5-ND	1.25	1.05	.75	PC810AI
	35	50	60	200	1	0.4	5,000	4-SMD	425-1436-5-ND	1.08	.95	.77	PC810I
	35	50	80	160	5	5	5,000	4-Dip	425-2185-5-ND◆	.36	.30	.22	PC817X1J000F
	35	50	80	160	5	5	5,000	4-SMD	425-2191-5-ND◆	.52	.42	.29	PC817X1J000F
	35	50	130	260	5	5	5,000	4-SMD	425-2192-5-ND◆	.52	.42	.29	PC817X2NIP0F
	70	50	50	400	0.5	5	5,000	4-Dip	425-2071-5-ND◆	.68	.55	.38	PC12310NS20F
	70	50	50	400	0.5	5	5,000	4-Dip	425-2072-5-ND◆	.72	.58	.40	PC12311NS20F
	70	50	50	400	5	5	5,000	4-Dip	425-2073-5-ND◆	.51	.43	.31	PC123AJ0000F
	70	50	50	400	5	5	5,000	4-Dip	425-2074-5-ND◆	.81	.65	.45	PC123BJ0000F
	70	50	50	400	5	5	5,000	4-Dip	425-2075-5-ND◆	.60	.48	.33	PC123J00000F
	70	50	50	400	5	5	5,000	4-Dip	425-2080-5-ND◆§	.80	.64	.44	PC123Y1J000F
	70	50	50	400	5	5	5,000	4-Dip	425-2081-5-ND◆§	.60	.50	.36	PC123Y2J000F
	70	50	50	400	5	5	5,000	4-Dip	425-2082-5-ND◆§	.76	.61	.42	PC123YJ0000F
	70	50	50	400	5	5	5,000	4-Dip	425-2083-5-ND◆§	.84	.68	.47	PC123YSJ000F
	70	50	50	400	5	5	5,000	4-Dip	425-1318-5-ND§	.60	.50	.36	PC123Y1
	70	50	50	400	5	5	5,000	4-Dip	425-1317-5-ND§	.57	.48	.35	PC123Y
	70	50	50	400	5	5	5,000	4-Dip	425-2571-5-ND◆§	.60	.50	.36	PC123FY2J00F
	70	50	50	400	5	5	5,000	4-Dip	425-2572-5-ND◆§	.84	.68	.47	PC123FY8J00F
	80	50	50	600	5	5	5,000	4-Dip	425-2427-5-ND◆	.44	.36	.25	PC817XJ0000F
	80	50	50	600	5	5	5,000	4-Dip	425-2184-5-ND◆	.52	.42	.29	PC817XJ0000F
	80	50	50	600	5	5	5,000	4-Dip	425-2186-5-ND◆	.36	.30	.22	PC817X2J000F
	80	50	50	600	5	5	5,000	4-Dip	425-2187-5-ND◆	.36	.30	.22	PC817X3J000F
	80	50	50	600	5	5	5,000	4-Dip	425-2188-5-ND◆	.36	.30	.22	PC817X4J000F
	80	50	50	600	5	5	5,000	4-Dip	425-2441-5-ND◆	.39	.33	.24	PC817X7J000F
	80	50	50	600	5	5	5,000	4-Dip	425-2190-5-ND◆	.52	.42	.29	PC817X9J000F
	80	50	50	600	5	5	5,000	4-SMD	425-2193-5-ND◆	.48	.39	.27	PC817XJ000F
	80	50	100	600	0.5	5	5,000	4-Dip	425-2594-5-ND◆	.77	.62	.43	PC81716NS20F
	80	50	100	600	0.5	5	5,000	4-Dip	425-2177-5-ND◆	.49	.41	.30	PC81710NS20F
	80	50	100	600	0.5	5	5,000	4-Dip	425-2179-5-ND◆	.48	.40	.29	PC81711NS20F
	80	50	100	600	0.5	5	5,000	4-Dip	425-2181-5-ND◆	.64	.52	.36	PC81712NS20F
	80	50	100	600	0.5	5	5,000	4-Dip	425-2183-5-ND◆	.48	.40	.29	PC81713NS20F
	350	50	40	80	5	5	5,000	4-SMD	425-2199-5-ND◆	.90	.73	.50	PC851XJ000F
	350	50	40	80	5	5	5,000	4-Dip	425-2442-5-ND◆	.62	.52	.38	PC851XJ0000F
2	90	50	1,000	—	1	0.5	5,000	4-Dip	425-1509-5-ND◆	.57	.48	.35	PC866
3	300	50	40	80 标准	5	5	5,000	16-Dip	425-1516-5-ND	4.49	3.95	—	PC8Q51
4	35	80	600	—	0.5	2	5,000	4-Dip	425-2174-5-ND◆‡	.96	.77	.53	PC81510NS20F
	35	80	600	—	0.5	2	5,000	4-SMD	425-2431-5-ND◆‡	.83	.70	.50	PC815XJ000F
	35	80	600	—	1	2	5,000	4-Dip	425-2175-5-ND◆‡	.93	.78	.62	PC815XJ0000F
5	350	150	1,000	4,000	1	2	5,000	4-Dip	425-2443-5-ND◆§‡	.90	.73	.50	PC852XJ0000F
	350	150	1,000	—	1	2	5,000	4-SMD	425-2200-5-ND◆‡	.75	.63	.45	PC852XJ000F
	350	150	1,000	—	1	2	5,000	4-SMD	425-2201-5-ND◆‡	.78	.66	.53	PC853XJ000F
6	35	50	50	600	5	5	5,000	6-Dip	425-1418-5-ND	.76	.61	.42	PC714V0NSZX
	35	50	50	600	5	5	5,000	6-Dip	425-1419-5-ND§	.84	.68	.47	PC714V0YSZX
	35	80	20	80	100	2	5,000	6-Dip	425-1426-5-ND§	.88	.71	.49	PC724V0NSZX
	35	80	20	80	100	2	5,000	6-Dip	425-2159-5-ND◆	.87	.73	.58	PC724V0NSZXF
	80	50	50	600	5	5	5,000	6-Dip	425-2155-5-ND◆	.84	.70	.56	PC714V0NSZXF
	80	50	50	600	5	5	5,000	6-Dip	425-2156-5-ND◆§	.84	.70	.56	PC714V0YSZXF

◆ 符合 RoHS 规范要求 † AC 输入 ‡ 达林顿晶体管输出 § DIN EN60747-5-2

(转下页)

Digi-Reel® Digi-Reel® 中含有大多数 SMT 消减零件。将 1-ND 改为 6-ND，或将 CT-ND 改为 DKR-ND，即为 Digi-Reel 零件编号。请参阅第 2 页上的 Digi-Key® 服务以获得更多信息。

全部产品均以美元计价。\$30 美元基本运费

2768 (CN2011-ZH) www.digikey.cn — 免费电话: 4008 824 440, 电话: (852) 3104 0500 — 传真: (852) 3104 0686