

TAMURA Corporation of America

Model

PAM250

250 Watts_{max} output power

Power Factor Correction

Single Output

Switch Mode Power Supply




Medical Grade
Certifications

H.A.L.T.
TESTED

Highly
Accelerated
Life
Testing

Electrical Specifications

Input Voltage:	85-132/180-264 VAC, 47-63 Hz, 1 phase
Input Current:	<6A RMS @ 115 VAC @ full load <3A RMS @ 230 VAC @ full load
Inrush Current:	<35A, pk @ 265 VAC @ cold start <75A, pk @ 132 VAC @ cold start
Harmonic Distortion:	Meets EN61000-3-2 for Class A
EMI Filtering:	Meets CISPR 11 and 22 and FCC Part 15 Class B (conducted)
Input Protection:	Internal AC line fuse; 250 VAC, 8A
Output Power:	250W with 25CFM air; 130W Convection
Line Regulation:	± 0.3%
Load Regulation:	± 0.5%
PARD:	<1% or 50mV; 20MHz bandwidth
Hold-up Time:	16 ms @ full load (120 VAC)
Output Polarity:	Output is floating
Minimum Load:	0% of rated load
Transient Response:	3% for 25% load change @ 1A/μs; 50% duty cycle 50/60 Hz
Output Rise Time:	<100 ms (10% to 90%)
Current Limit:	105-130% of rated current; Hiccup
Remote Sense:	Compensates for up to 250mV of total cable drop
Remote On/Off:	Optional
Leakage Current:	< 300 μA

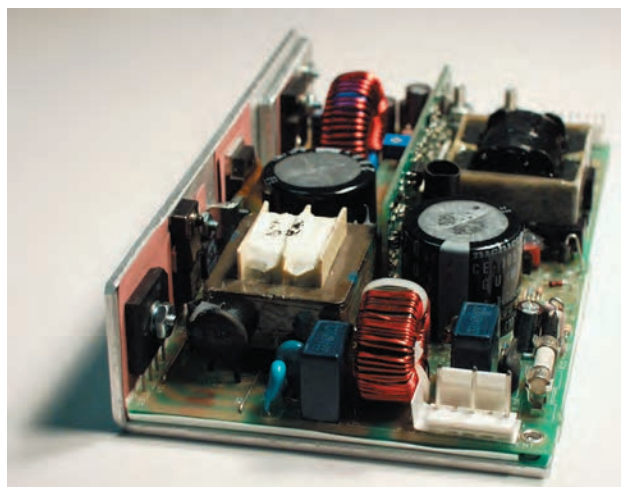

Thermal Shutdown	Standard
DC OK:	Standard; Open Collector
Turn-on Delay:	<1 second after application of AC Input
Stability:	<0.1% for 8 hours after 1/2-hour warm up
Isolation:	>20 MΩ @ 100 VDC between output terminals and chassis ground
AC Power Fail:	TTL _{LOW} logic "0" at least 2 ms before output drops 5%; Open collector
Overvoltage Protect:	Factory set, 125% ±5%, cycle AC to reset
Reverse Voltage:	Output has reverse voltage protection; Reverse current limited to 100% of output rating
Efficiency:	Up to 85%
MTBF:	MIL-STD-HDBK 217E >200,000 hours @ 25°C Highly Accelerated Life Testing

Available Voltage Outputs*

Voltage Codes	Voltages (Volts)	Continuous Current (Amps)
-4	12.0	21
-5	15.0	17
-6	24.0	10.5
-7	28.0	9.0
-8	36.0	7.2
-9	48.0	5.5

* Consult factory for other voltages and OEM quantities.

Note: Standard models are shown **bold**

PART # STRUCTURE:

MODEL - **VOLTAGE CODE** - **OPTION CODES** (back)

- **V1** -

PAM250 - **X** - **ABC....**

Example: Part Number **PAM250-6-OR**= 250W Power Factor Corrected, 24V @ 10.5A with an OR-ring Diode and Remote On/Off.

See 3rd page for PAM250 CODE TABLE AND AVAILABLE OPTIONS.

Model

PAM250

Options (code)

12V@0.5A Aux./Fan Drive (A) Droop Current Share $\pm 10\%$ (B)
 Fan Assembly (C) DC OK Invert (E)
 PF Invert (F) Field-Configurable (G)
 Single Wire Current Share $\pm 5\%$ (I) Square Current Limit (J)
 Molex Connector (K) Metric Mounting (M)
 OR-ing Diode (O) Remote On/Off (R)
 Remote On/Off Invert (S)

Safety Compliance

Recognition to UL60601-1
 CSA C22.2 No. 601.1
 BAUART Certification to EN60601-1
 CB Test Report in Accordance with IEC60601-1
 CE Declaration to Low Voltage Directive 2006/95/EC




Surge & ESD Test Levels

EN61000-4-5 Level 3 EN61000-4-2 Level 2
 EN61000-3-2 for Class A EN61000-4-2 Level 3 (Air Only)
 EN61000-4-4 Level 3 EN61000-4-11
 CISPR 11 and 22 FCC Part 15 Class B (conducted)

Physical Specifications

Dimensions: (HxWxL) 1.5" x 4.0" x 7"
 Operating Temp: 0 to 70°C; rated power to 50°C
 derate linearly to 50% at 70°C.
 Relative Humidity: 5% to 90%, non-condensing
 Storage: -50 to 85°C/20-90% RH
 Altitude: 6561
 40,000' storage

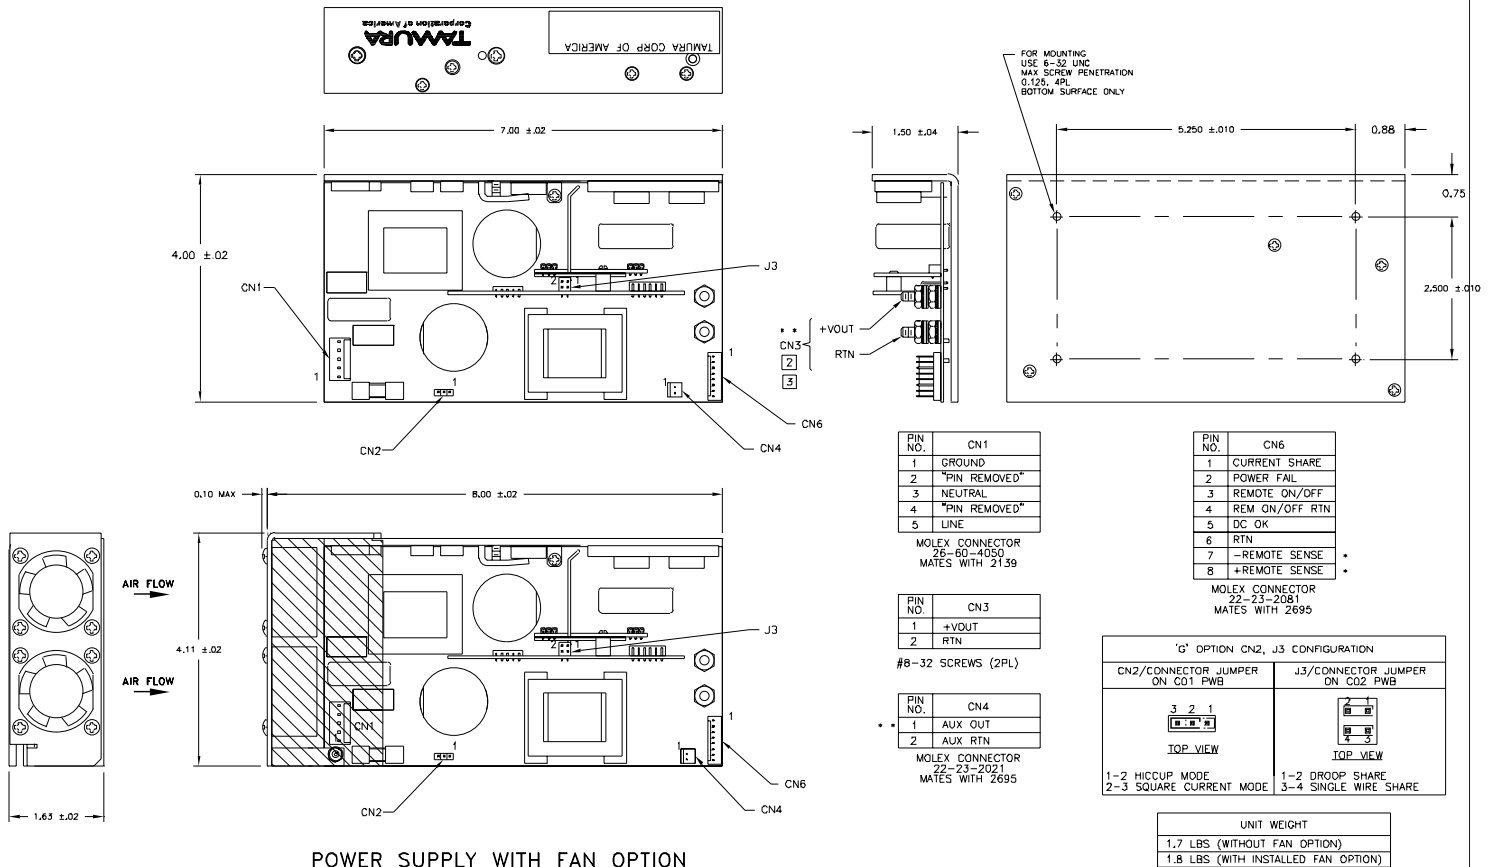

- [3] OPTIONAL—MOLEX CONNECTOR (OPTION 'K'—LIMITED TO 7A) MAY BE SPECIFIED FOR CN3 INSTEAD OF STANDARD OUTPUT STUDS.
 [2] DO NOT EXCEED 17 INCH-LBS (MAX TORQUE) WHEN TIGHTENING TOP NUTS ON OUTPUT STUDS.
 1. FOR CLARITY NOT ALL ITEMS ARE SHOWN IN EACH VIEW.

- * **WARNING:** DAMAGE WILL OCCUR IF REMOTE SENSE LEADS (CN6-7 & CN6-8) ARE REVERSED OR USED WITH LOAD DISCONNECTED FROM OUTPUT (CN3).
 ** **NOTE:** FOR PROPER REGULATION OF AUXILIARY OUTPUT, APPLY AT LEAST 10% OF RATED LOAD TO VOUT.



PAM250 Series Power Supply

Standard Models
PAS250-X-Y₁ ... Y_n

Tailored Models
PAS250-60ZZZ

Custom Models
PAS250-61ZZZ

	Voltage and Current Ratings		Standard Options	
X Codes	Volts	Amps	Y Code Descriptions	
1	Not Available		A 12Vdc, 0.5A Auxiliary Output** B Droop Share* C Fan Assembly** E DCOK Invert F PF Invert G Field configurable options – B, I, and J I Single Wire Share* J Square Current Limit K Molex Connector, 7A max. (#8 stud standard) M Metric Mounting O ORing Diode R Remote On/Off (closed is OFF) S Remote On/Off Invert (open is OFF) *Includes Option J **Options A and C are not available together	
2	Not Available			
3	Not Available			
4	12.0	21.0		
5	15.0	17.0		
6	24.0	10.5		
7	28.0	9.0		
8	36.0	7.2		
9	48.0	5.5		
			Tailored Units (no safety changes)	
			60ZZZ, where ZZZ = Factory Assigned Number Harnesses Added, Special test data, Etc.	
			Custom Units (safety critical changes)	
			61ZZZ, where ZZZ = Factory Assigned Number	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tamura:

[PAM250-4](#) [PAM250-6](#) [PAM250-9](#)