


High Frequency Wire Wound Transformers

EP13 Platforms - SMT



- Power Range:** up to 60W
- Height:** 12.7mm Max
- Footprint:** 17.7mm x 14.0mm Max
- Topology:** Forward and Flyback

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA1136NL	Pri. Inductance	(3-4)	126.7μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	7.5μH MAX	
	DCR	(3-4)	440mΩ MAX	
		(8, 7-10, 9)	6mΩ MAX	
		(2-1)	88mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1353.6		
PA1137NL	Pri. Inductance	(3-4)	126μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	7.5μH MAX	
	DCR	(3-4)	460mΩ MAX	
		(8, 7-10, 9)	12mΩ MAX	
		(2-1)	94mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1353.6		
PA1138NL	Pri. Inductance	(3-4)	126.7μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	7.5μH MAX	
	DCR	(3-4)	460mΩ MAX	
		(8, 7-10, 9)	55mΩ MAX	
		(2-1)	94mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1353.6		
PA1210NL *	Pri. Inductance	(3-4)	480μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 8, 7, 6) shorted	10μH MAX	
	DCR	(3-4)	570mΩ MAX	
		(8-10)	15mΩ MAX	
		(6-7)	40mΩ MAX	
		(2-1)	325mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	5128.2		

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

High Frequency Wire Wound Transformers

EP13 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA1218NL	Pri. Inductance	(3-4)	480μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 8, 7, 6) shorted	10μH MAX	
	DCR	(3-4)	570mΩ MAX	
		(8-10)	15mΩ MAX	
		(6-7)	40mΩ MAX	
		(2-1)	325mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	5128.2		
PA1260NL	Pri. Inductance	(3-4)	77.4μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	0.8μH MAX	
	DCR	(3-4)	220mΩ MAX	
		(8, 7-10, 9)	18mΩ MAX	
		(2-1)	250mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1804.2		
PA1267NL	Pri. Inductance	(4-1)	155.5μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(4-1) with (10, 9, 8, 7) shorted	5μH MAX	
	DCR	(4-1)	330mΩ MAX	
		(7, 8-9, 10)	11mΩ MAX	
		(5-2)	650mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	2215.1		
PA1269NL	Pri. Inductance	(3-4)	77.4μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	0.8μH MAX	
	DCR	(3-4)	100mΩ MAX	
		(8, 7-10, 9)	6.5mΩ MAX	
		(2-1)	270mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	1804.2		
PA1276NL	Pri. Inductance	(3-4)	77.4μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	0.8μH MAX	
	DCR	(3-4)	100mΩ MAX	
		(8, 7-10, 9)	75mΩ MAX	
		(2-1)	270mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1804.2		

High Frequency Wire Wound Transformers

EP13 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

PA1309NL	Pri. Inductance	(3-4)	16.4 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	0.7 μ H MAX	
	DCR	(3-4)	38m Ω MAX	
		(8, 7-10, 9)	10m Ω MAX	
		(2-1)	200m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	559.0		
PA1367NL	Pri. Inductance	(3, 4-2, 1)	66.1 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3, 4-2, 1) with (10, 9, 8, 7) shorted	1.0 μ H MAX	
	DCR	(3, 4-2, 1)	82m Ω MAX	
		(7, 9)	12m Ω MAX	
		(8-10)	97m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	57.0		
PA1460NL	Pri. Inductance	(3, 4)	40 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3, 4) with (10, 9, 8, 7) shorted	2.5 μ H MAX	
	DCR	(3, 4)	95m Ω MAX	
		(8, 7-10, 9)	28m Ω MAX	
		(2-1)	66m Ω MAX	
	Hi-Pot	Pri-Sec	1650Vrms	
	K1 Factor	1025.6		
PA1528NL	Pri. Inductance	(3, 4)	28.9 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3, 4) with (10, 9, 8, 7) shorted	1 μ H MAX	
	DCR	(3, 4)	58m Ω MAX	
		(8, 7-10, 9)	27m Ω MAX	
		(2-1)	55m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	871.8		
PA1576NL	Pri. Inductance	(3, 4)	230.4 μ H $\pm$ 30%	FLYBACK TRANSFORMER
	Lk. Inductance	(3, 4) with (10, 9, 8, 7) shorted	1.5 μ H MAX	
	DCR	(3, 4)	36m Ω MAX	
		(8, 7-10, 9)	3.5m Ω MAX	
		(2-1)	58m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	42.7		

High Frequency Wire Wound Transformers

EP13 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA1577NL	Pri. Inductance	(3-4)	230.4µH ±60%	
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	1.5µH MAX	
	DCR	(3, 4)	36mΩ MAX	
		(7-9)=(8-10)	54mΩ MAX	
		(2-1)	55mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	42.7		
PA1686NL *	Pri. Inductance	(3, 4)	64µH ±10%	
	Lk. Inductance	(3, 4) with (10, 9, 8, 7) shorted	1.5µH MAX	
	DCR	(3, 4)	75mΩ MAX	
		(8, 7-10, 9)	10mΩ MAX	
		(2-1)	120mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1641.0		
PA1698NL *	Pri. Inductance	(3, 4)	57.6µH ±10%	
	Lk. Inductance	(3, 4) with (10, 9, 8, 7) shorted	3.5µH MAX	
	DCR	(3, 4)	110mΩ MAX	
		(8, 7-10, 9)	6mΩ MAX	
		(2-1)	88mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1230.8		
PA1718NL	Pri. Inductance	(3-4)	108µH ±7%	
	Lk. Inductance	(3-4) with (10, 9, 8, 7, 6) shorted	5µH MAX	
	DCR	(3-4)	260mΩ MAX	
		(8, 7-10, 9)	15mΩ MAX	
		(2-1)	165mΩ MAX	
		(6-8, 7)	60mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	1846.2		
PA1769NL *	Pri. Inductance	(3-4)	6.7µH ±7%	
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	0.65µH MAX	
	DCR	(3-4)	25mΩ MAX	
		(8, 7-10, 9)	6.5mΩ MAX	
		(2-1)	115mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	381.8		

High Frequency Wire Wound Transformers

EP13 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

PA1861NL	Pri. Inductance	(1,4)	115.5μH ±7%	FLYBACK TRANSFORMER
	Lk. Inductance	(1,4) with (10, 9, 8, 7) shorted	0.65μH MAX	
	DCR	(1, 4)	330mΩ MAX	
		(7, 8-9, 10)	11mΩ MAX	
		(5-2)	460mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1645.3		
PA2070NL	Pri. Inductance	(5-4)	164μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(5-4) with (10, 9, 8, 7) shorted	3μH MAX	
	DCR	(5-4)	292mΩ MAX	
		(7, 8-9, 10)	8.5mΩ MAX	
		(2-1)	60mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	2628.2		
PA2086NL	Pri. Inductance	(2-3)	164μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(2-3) with (10, 9, 8, 7) shorted	3μH MAX	
	DCR	(2-3)	292mΩ MAX	
		(5-4)	64mΩ MAX	
		(9-10)	17mΩ MAX	
		(7-8)	100mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	2628.2		
PA2194NL *	Pri. Inductance	(1-2)	617.4μH ±28%	FLYBACK TRANSFORMER
	Lk. Inductance	(1-2) with (10, 9, 7, 6, 5, 4) shorted	2μH MAX	
	DCR	(1-2)	80mΩ MAX	
		(9, 10-6, 7)	30mΩ MAX	
		(4-5)	4mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	24.4		
PA2204NL	Pri. Inductance	(2, 3-4, 5)	5μH ±28%	FLYBACK TRANSFORMER
	Lk. Inductance	(2, 3-4, 5) with (10, 9, 8, 7) shorted	0.25μH MAX	
	DCR	(2, 3-4, 5)	20mΩ MAX	
		(8, 7-10, 9)	10.3mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	320.5		

High Frequency Wire Wound Transformers

EP13 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA2221NL	Pri. Inductance	(5-4)	152μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(5-4) with (10, 9, 8, 7) shorted	4μH MAX	
	DCR	(5-4)	280mΩ MAX	
		(7, 8-9, 10)	5.2mΩ MAX	
		(2-1)	67mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	2435.9		
PA2271NL	Pri. Inductance	(3-4)	10μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	1μH MAX	
	DCR	(3-4)	23mΩ MAX	
		(8, 7-10, 9)	6.7mΩ MAX	
		(2-1)	54mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	512.8		
PA2297NL *	Pri. Inductance	(5-4)	50μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(5-4) with (10, 9, 8, 7) shorted	4μH MAX	
	DCR	(5-4)	140mΩ MAX	
		(7, 8-9, 10)	3.5mΩ MAX	
		(2-1)	73mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	949.7		
PA2300NL *	Pri. Inductance	(1-2)	85μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(1-2) with (10, 9, 8, 7, 6, 5, 4) shorted	0.75μH MAX	
	DCR	(1-2)	325mΩ MAX	
		(9, 10-6, 7)	9mΩ MAX	
		(4-5)	815mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	1614.4		
PA2328NL	Pri. Inductance	(1-2)	100μH ±10%	FORWARD TRANSFORMER
	Lk. Inductance	(1-2) with (10, 9, 6, 5, 4) shorted	0.875μH MAX	
	DCR	(1-2)	210mΩ MAX	
		(6, 7-9, 10)	9mΩ MAX	
		(4-5)	580mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	18.3		

*please note this part has an alternate pin-out per note 5.

High Frequency Wire Wound Transformers

EP13 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA2367NL	Pri. Inductance	(2-1)	85µH ±28%	FLYBACK TRANSFORMER
	Lk. Inductance	(2-1) with (10, 9, 7, 6, 5, 4) shorted	0.75µH MAX	
	DCR	(2-1)	325mΩ MAX	
		(9, 10-6, 7)	25.5mΩ MAX	
		(4-5)	815mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	KI Factor	1614.4		
PA2369NL	Pri. Inductance	(5-3)	37µH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(5-3) with (6, 7, 9, 10) shorted	0.75µH MAX	
	DCR	(5-3)	89mΩ MAX	
		(6, 7-9, 10)	6.2mΩ MAX	
		(2-1)	84mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	KI Factor	948.7		
PA2417NL	Pri. Inductance	(1-2)	530µH ±28%	FORWARD TRANSFORMER
	Lk. Inductance	(1-2) with (10, 9, 7, 6, 5, 4) shorted	0.5µH MAX	
	DCR	(1-2)	750mΩ MAX	
		(6, 7-9, 10)	6.5mΩ MAX	
		(4-5)	886mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	KI Factor	25.6		
PA2431NL	Pri. Inductance	(1-2)	429.3µH ±28%	FORWARD TRANSFORMER
	Lk. Inductance	(1-2) with (10, 9, 7, 6, 5, 4) shorted	0.5µH MAX	
	DCR	(1-2)	68mΩ MAX	
		(6, 7-9, 10)	6.75mΩ MAX	
		(4-5)	970mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	KI Factor	28.5		
PA2437NL	Pri. Inductance	(1-4) with (3-2) shorted	80µH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(1-4) with (3-2) and (9-10) shorted	TBDµH MAX	
	DCR	(1-3)	47mΩ MAX	
		(2-4)	58mΩ MAX	
		(6-7)	155mΩ MAX	
		(8-10)	12mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	KI Factor	1709.4		

High Frequency Wire Wound Transformers

EP13 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA2452NL *	Pri. Inductance	(1-2)	100 μ H $\pm$ 10%	
	Lk. Inductance	(1-2) with (10, 9, 7, 6, 5, 4) shorted	TBD μ H MAX	
	DCR	(1-2)	99m Ω MAX	
		(6, 7-9, 10)	6.6m Ω MAX	
		(4-5)	200m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	21.4		
				FORWARD TRANSFORMER
PA2466NL	Pri. Inductance	(5-3)	37 μ H $\pm$ 10%	
	Lk. Inductance	(5-3) with (6, 7, 9, 10) shorted	0.75 μ H MAX	
	DCR	(5-3)	89m Ω MAX	
		(6, 7-9, 10)	4.6m Ω MAX	
		(2-1)	96m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	948.7		
				FLYBACK TRANSFORMER
PA2467NL	Pri. Inductance	(5-3)	37 μ H $\pm$ 10%	
	Lk. Inductance	(5-3) with (6, 7, 9, 10) shorted	0.75 μ H MAX	
	DCR	(5-3)	89m Ω MAX	
		(6, 7-9, 10)	28m Ω MAX	
		(2-1)	96m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	948.7		
				FLYBACK TRANSFORMER

High Frequency Wire Wound Transformers

EP13 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk} \text{ (A)}$$
4. In high volt-sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:


$$CoreLoss \text{ (W)} = 2.5E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$
 where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * (A)$
 For Forward Topology: $\Delta B = K1_Factor * Volt-\mu sec$

5. The standard pin-numbering for this package is indicated in the below mechanical drawing showing pin 1 on the lower right corner and the numbers proceeding clock wise to pin 10 on the upper right corner. However, for those parts that are indicated as having an alternate pinout, pin 1 is in the lower left corner and the numbers proceed counter-clockwise to pin 10 in the upper left corner.
6. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1136NL becomes PA1136NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) an depth (Ko=13.2mm).
7. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

* Contact Pulse for availability

Mechanical

PAXXXXNL

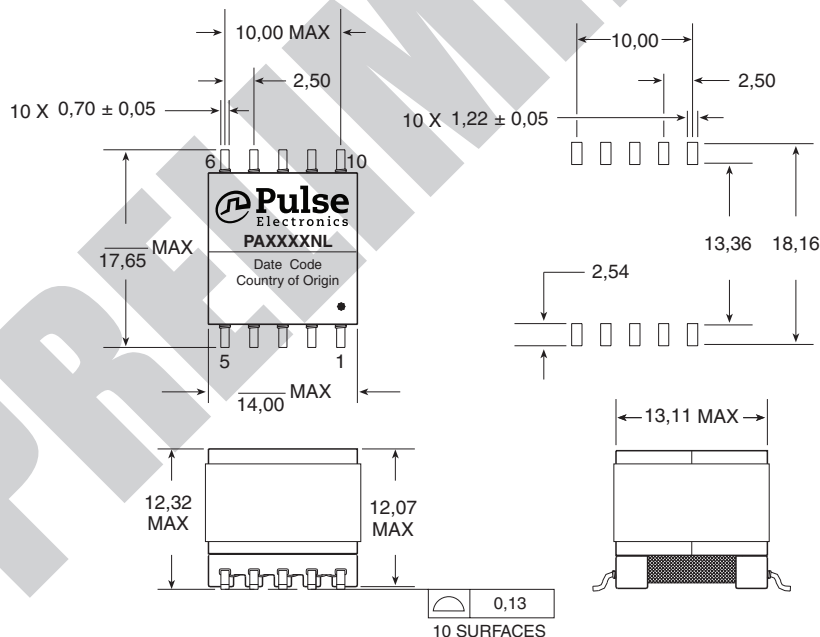

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.