

SMT POWER INDUCTORS

Power Beads - PA2083NL Series



- Current Rating:** Over 90A_{pk}
- Inductance Range:** 70nH to 205nH
- Height:** 7.0mm Max
- Footprint:** 7.6mm x 7.4mm Max




Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C⁷

Part Number	Inductance @0A _{DC} (nH ±10%)	Inductance @I _{rated} (nH TYP)	I _{rated} ¹ (A _{DC})	DCR ² (mΩ)	Saturation Current ³ (A TYP)		Heating ⁴ Current (A TYP)
					25°C	100°C	
PA2083.700NL	70	70	27	0.60 ±8%	93	75	27
PA2083.101NL	105	105	27		61	54	
PA2083.121NL	120	120	27		55	48	
PA2083.161NL	160	160	27		41	38	
PA2083.181NL	185	170	27		36	33	
PA2083.201NL	205	177	27		32	29	



NOTES:

- The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- The nominal DCR is measured from point (a) to point (b), as shown on the mechanical drawing below.
- The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C and 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current is the DC current which causes the part temperature to increase by approximately 40°C.
- In high volt*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- Optional tape and reel packaging can be ordered by adding a "T" suffix to the part number (ie: PA2083.700NL becomes PA2083.700NLT). Pulse complies to industry standard tape and reel specification EIA481.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.


Mechanical



SUGGESTED PAD LAYOUT

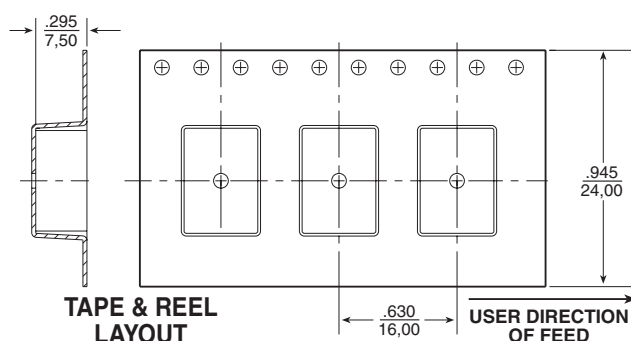


TAPE & REEL LAYOUT

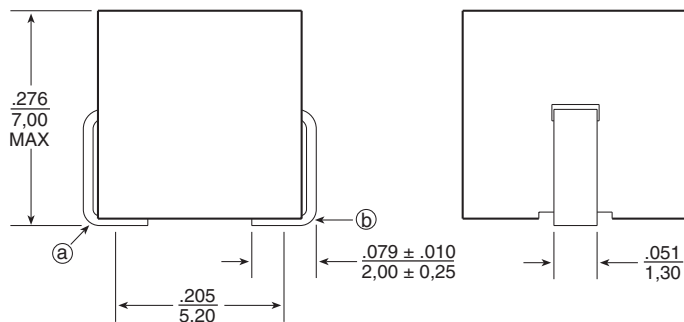

Schematic

Weight1.5 grams
Tape & Reel500/reel

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0,25





SMT POWER INDUCTORS


Power Beads - PA2083NL Series




Lvlsl for PA2083.XXXNL Series

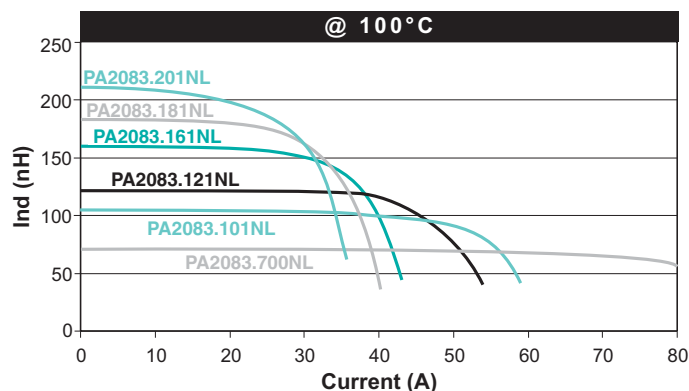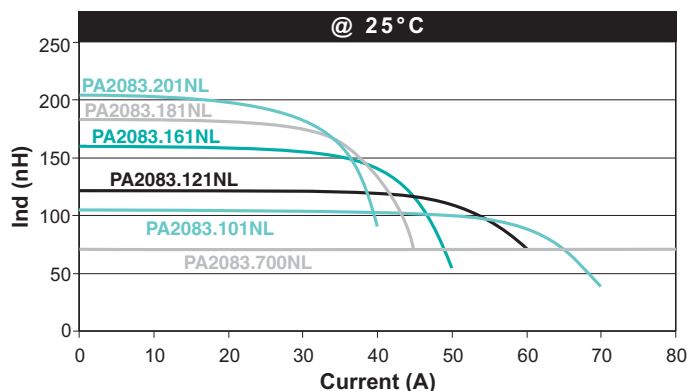

CoreLoss (W) for PA2083.XXXNL Series

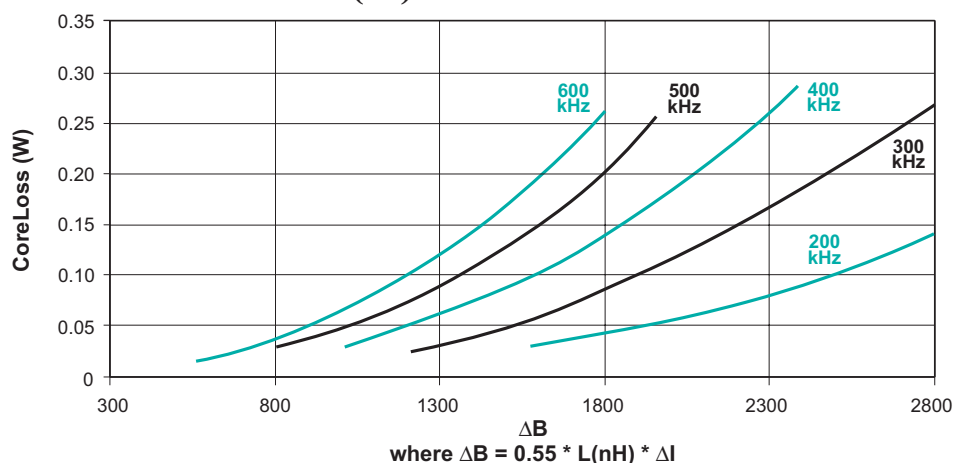

Temp Rise vs Power Dissipation for PA2083.XXXNL Series

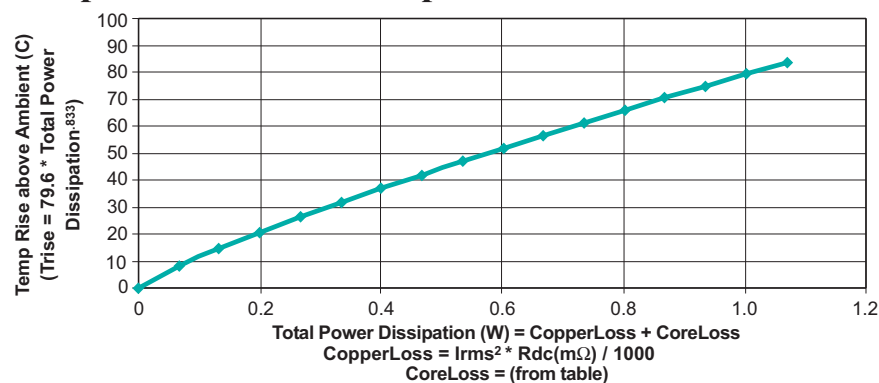

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.
www.pulseeng.com

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen
Tech-Innovation International
Tenth Kejinan Rd.
High-Tech Industrial Park
Nanshan District, Shenzhen
China

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Tel: 86 21 54643211/2
Fax: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Rd.
Yang Mei Chen
Tao Yuan Hsien
Taiwan, R. O. C.

Tel: 886 3 4641811
Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2007. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

P659.A (7/07)